



COMPONENT
HARDWARE®

COMPONENT HARDWARE CATALOG

Your Global Partner for Innovative Solutions



COMPONENT
HARDWARE®

www.componenthardware.com

TABLE OF CONTENTS

TABLE OF CONTENTS	1
ABOUT US	2
SERVICES	3
GLOBAL MANUFACTURING CAPABILITIES	4-5
SUBASSEMBLIES	6-7
CUSTOM PRODUCT CAPABILITIES	8-9
NEW PRODUCTS	10-13
COOKING HOOD	A14-A34
REACH-IN REFRIGERATION	B35-B65
WALK-IN REFRIGERATION	C66-C94
LIGHTING & ELECTRICAL	D95-D111
EQUIPMENT LEGS	E112-E137
INSTITUTIONAL CASTERS	F138-F161
CABINET HARDWARE	G162-G192
CAFETERIA COMPONENTS	H193-H211
HOT SIDE COMPONENTS	I212-I215
FABRICATION SUPPLIES	J216-J228
EUROPEAN CATALOG	EU229-EU266
CATEGORY INDEX	IND267-IND277
ALPHANUMERIC INDEX	IND278-IND283
TERMS & CONDITIONS	284



COMPONENT HARDWARE

ABOUT US

- Innovative manufacturer of specialty components and customized solutions since 1981
- Market leader with extensive engineering, global manufacturing and distribution capabilities
- Serving the foodservice, healthcare, hospitality, commercial and institutional markets
- Offering a wide array of commercial plumbing products, kitchen exhaust system components, fabrication hardware and refrigeration hardware
- Providing the industry's best casting, forging, stamping, machining, injection molding, extruding, fabrication and custom sub-assembly solutions

WHY YOU SHOULD CHOOSE US

- **A trusted and valued supply partner**, solving our customers' problems - saving them time, money, and headaches
- **Global Supply Chain** ensures on-time delivery of quality products wherever you may need them to keep your production lines running smoothly and efficiently
- Our meticulous **Quality Assurance team** insures our products meet or exceed all market standards and regulatory requirements
- Ability to **cost-effectively engineer** and build specialty or proprietary component and subassembly solutions on projects of all sizes
- **Global engineering and manufacturing capabilities**, including machining, metal forming, forging, stamping, die and sand casting, plastic injection molding, extruding, fabrication and subassembly operations allow for complete design and customization flexibility
- **Comprehensive product catalog** of over 9,000 items including specialty and customer-proprietary items
- Our **virtual manufacturing model** permits us to own our product designs and tooling without incurring the prohibitive expenses of owning the physical production facilities

WHERE TO FIND US

- Headquartered in Matawan, NJ, USA with warehouses and sales offices located throughout the United States, Canada, Asia and Europe
- International distribution network ensures timely delivery of quality products to virtually any location in the world
- Follow us on LinkedIn, Facebook, Instagram and Twitter
- For further information, please visit our web site at: www.componenthardware.com



Matawan, New Jersey



Columbus, Ohio



Fullerton, California



Dallas, Texas



Markham, Ontario



Breda, Netherlands

Innovative Engineering

Strategic Solutions Provider – our dedicated team supports all your engineering and manufacturing needs from start to finish, whether it is a full concept design or just minor design changes to an existing product. We have the ability to develop unique custom solutions with a full staff of qualified mechanical and electrical engineers and offer comprehensive customer product design support with onsite design and technical assistance. It is our consultative design, reverse engineering capabilities, fast project/quote turnaround, value engineering for cost reduction and numerous patented and trademarked products that keep our customers coming back.

Our team of certified SolidWorks 3-D CAD professionals use 3-D rapid prototype modeling to help get from concept to prototype to production in the shortest time possible at the lowest possible cost.

Global Regulatory Compliance – our engineers work with outside testing agencies to insure your products meet or exceed all regulatory requirements, including NSF, UL, CE, WRAS, NFPA, and RoHS.



Supply Chain Optimization

Strategic Warehousing – we're committed to insuring we have the required high-quality finished parts on our shelves at all times, to take your production to the next level – we make a large investment in inventory, so our customers don't have to.

Over 250,000 sq. ft. of dedicated warehouse space in the U.S., Canada and Europe.

Global Distribution Network – our global network of distributors ensures an uninterrupted supply of products – delivering what you need, when you need it.

International Logistics – our knowledgeable staff will insure the smooth, timely delivery of product wherever your facilities may be located.



Custom Subassemblies

We are a strategic manufacturing partner by simplifying your production processes, so you can concentrate on your core business.

We have the capability to supply complex, subassemblies and complete assemblies. Besides supplying the individual component parts we are traditionally known for, like bearings and drawer slides, we can also help you to design and manufacture complete product assemblies and sub-assemblies to save you additional time and money.



GLOBAL MANUFACTURING CAPABILITIES

Forging

Forging is the oldest metal working process known to man and is the term used for shaping metal by using localized compressive forces. Cold forging is done at room temperature or near room temperature. Hot forging is done at a high temperature, which makes metal easier to shape and less likely to fracture. Warm forging is done at intermediate temperature between room temperature and hot forging temperatures. Forged parts can range in size from 2 oz. to 3 lbs. Forged parts usually require further processing to achieve a finished part. Forging results in metal that is stronger than cast or machined metal parts and can impart a high strength-to-weight ratio.



Die Casting

During the die casting process, engineers inject molten metal into a steel mold, often under intense pressure. The sizes of the machines differ depending on the size of the respective mold. The complete die casting cycle varies depending on the weight and size of the components. Die casting is the fastest way of producing precise, high-quality, nonferrous metal parts.




Sand Casting

Sand casting, also known as sand molded casting, is a metal casting process characterized by using sand as the mold material. The term "sand casting" can also refer to an object produced via the sand casting process. Sand castings are produced in specialized factories called foundries.



Investment Casting

Investment casting or lost wax casting is a process in manufacturing whereby a refractory ceramic material is used to coat a wax pattern. The geometry of the ceramic material takes the casting shape once it has fully hardened. The wax is melted, discharged from the mold and molten metal and poured into the wax pattern's cavity. Investment casting allows for the production of accurate components repetitively.

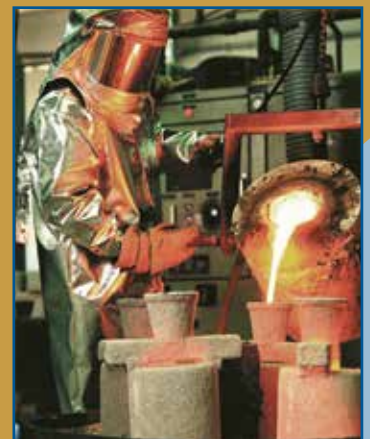

Stamping

Stamping features a versatile range of sheet-metal forming manufacturing processes which include punching using a stamping press, bending, embossing or coining. Stamping can be done on sheet metal and some other materials such as polystyrene. A progressive die stamping process is characterized by multiple cutting and forming operations that take place simultaneously. Common materials used for progressive die stamping include various grades of stainless steel and cold rolled commercial steel. Also, tooling is generally less expensive here.



GLOBAL MANUFACTURING CAPABILITIES



Machining

Our machining operations are categorized into milling, turning, tapping, threading, and drilling. These operations use milling machines to cut workpieces while drilling operations use rotating cutters to produce and refine holes. Threading and tapping are processes that form or cut female and male mating pairs. All these procedures are essential and support our commercial kitchen components manufacturing.



Plastic Injection Molding & Extruding

Plastic injection molding is a process that produces thermosetting and thermoplastic materials. It entails injecting molten plastic into a mold at high pressure, usually the inverse of the shape of the product. Then, molds are created using metal by mold makers or tool makers who use aluminum or steel to form the required features with utmost precision. Commonly used materials are ABS Nylon, polystyrene, polypropylene, PVC, and polyethylene.



Wire Forming



Also referred to as wire forming or fabrication, metal forming involves bending and stamping wires into fabricated forms to create a wide range of items. Common products include wire racks, hooks, specialty pins, springs, clips, and other customized products. Our engineers perform wire forming processes either manually or using CNC machines. Stamping involves placing a stamp sheet metal, in either coil or blank form, into a stamping press. During the procedure, the die surface and a tool form a net-shaped product. Materials commonly used include various grades of stainless steel, commercial steel, and cold-rolled steel.



Plating & Powder Coating

This is a collective name for surface-covering techniques that involve depositing a metal into a conductive surface. Plating prevents corrosion of electronic devices, faucets, and hinges. It influences product attributes such as wear-ability, paint adhesion, shielding, and conductivity. We specialize in zinc plating, electroplating, chrome plating, and nickel plating. Powder coating involves applying a distinctive dry powder coating, which does not need a solvent to keep the filler parts and binder in a liquid form. Engineers apply the powder electrostatically and cure it under heat to form a layer. The finish that it creates to our plumbing component manufacturing is tougher and harder than that of paint.



800-526-3694



800-513-3078



COMPONENT
HARDWARE


BUILDING COMPONENTS AND SUBASSEMBLIES TO YOUR DESIGN

Besides supplying the individual component parts we are traditionally known for, we can also help you to design and manufacture complete assemblies and subassemblies to save you additional time and money.



We Can Help You...


- Reduce labor costs
- Minimize inventory and obsolescence
- Take complexity out of manufacturing
- Reduce space/scrap/packageing

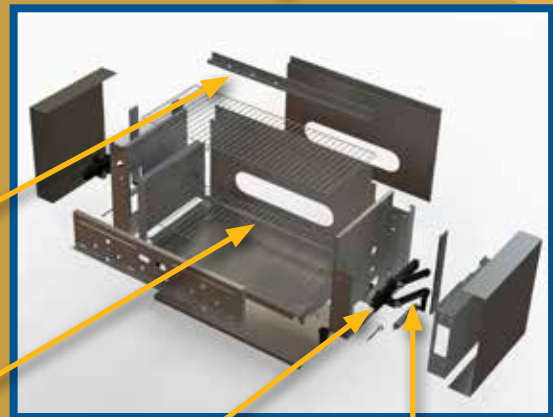


Let Component Hardware build your components and subassemblies to reduce cost and improve profitability.



Complete Assembly

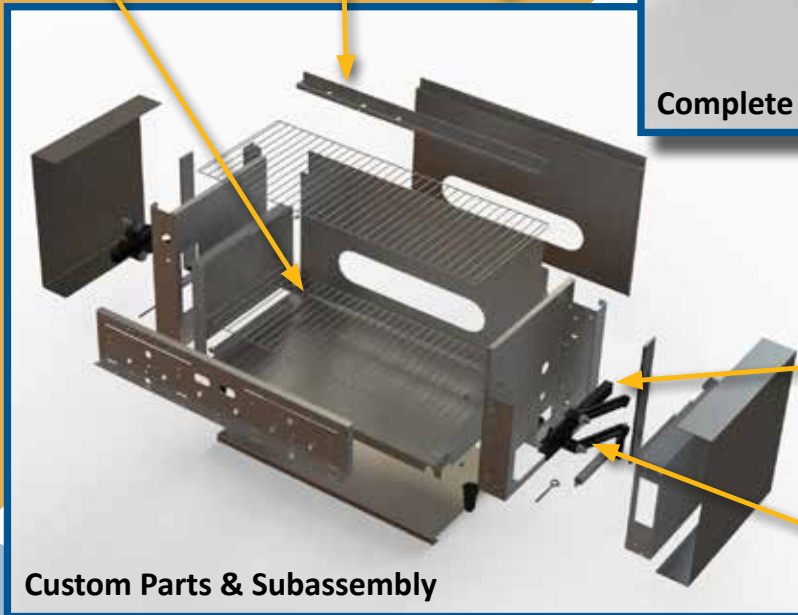

Custom Parts & Subassembly

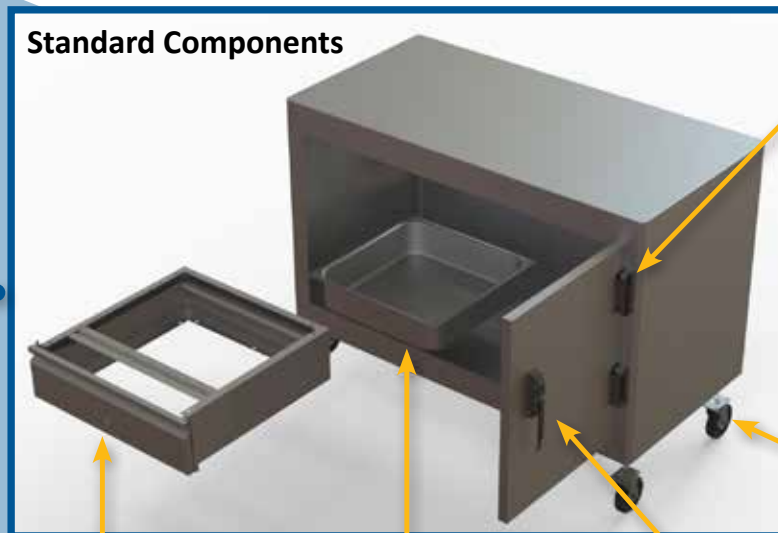

Standard Components



800-526-3694



800-513-3078



COMPONENT
HARDWARE

CUSTOM PRODUCT CAPABILITIES

For many years, Component Hardware has been a trusted source for your individual component parts. Now, using our same reliable factories and supply chain, we can be trusted to furnish you with complex subassemblies and complete assemblies to help you take additional cost out of your procurement and production processes.




Blower Fans




Cooling Fans



Fan Motors

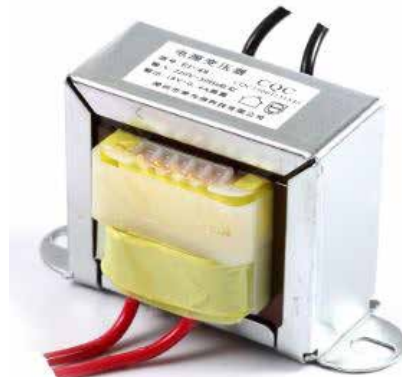

Transformers

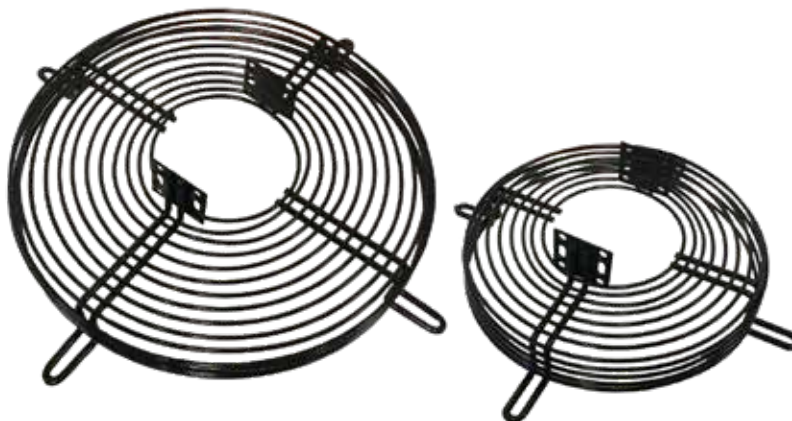

Fan Guards

CUSTOM PRODUCT CAPABILITIES



Conveyer Belts



Handle Supports



Oven Thermostats



Oven/BBQ Grates & Grills



Spark Igniters



Heating Elements



Round Recessed Dimmable LED Down Light

- May be wired with a dimmer switch to control ideal lighting conditions at the work surface
 - 50,000 hour service life – 50 times longer than a standard 100W incandescent bulb
 - Rated to a maximum operating temperature of 80°C (176°F)
- Passivated aluminum heat sink effectively dissipates heat to prolong the life of the LEDs and on-board driver
 - Suitable for use in commercial cooking hoods
 - Suitable for use in wet or dry locations
 - Designed for easy installation
- Furnished with tempered glass lens and stainless steel frame



15 Watt
LED-L80-15DN - Natural White
LED-L80-15DW - Warm White


UL File# E339654


COMPONENT



20 Watt
LED-L80-20DN - Natural White
LED-L80-20DW - Warm White


UL File# E339654

For more information go to page D103

RECESS MOUNT NON-DIMMABLE LED PERIMETER ACCENT LIGHTS

- 4 Watt LED light • 290 lumens • 3000 Kelvins
- -4°F to 104°F (-20°C to 40°C) operating temperature
- 50,000 hour rated LED lamp life
- 120 degree beam angle floods the workspace with light
- Supplied with two spring loaded mounting clips for easy installation - keeps bezel flush with hood surface
- Satin chrome finish bezel matches hood • Supplied with polycarbonate lens
- HACCP Compliant – LED lighting runs cooler than old incandescent and fluorescent fixtures, helping you to better control food temperatures in your refrigerators/coolers/freezers. In addition, LED lights do not contain harmful mercury, like fluorescent fixtures, eliminating a potential chemical hazard in your workplace.



LED-PL35-W - Non-Dimmable

For more information go to page D107



Lift-Off/Self-Closing Electronic Edgemoat Hinge with Plunger Switch

- Can power one electrical appliance per hinge using the UL Recognized integrated plunger switch
 - Hinge design permits easy door removal without tools
- Same mounting hole configuration as our popular R50-Series hinge allows for easy retrofit applications
- Improved bracket and cam design extends the life cycle of the hinge and minimizes door wobble – tested above 250,000 cycles where one cycle is door opened and then closed
- Same mounting hole configuration as our popular R50-Series hinge allows for easy retrofit applications
 - Improved cover design reduces the chance of the cover coming off in the field
 - Die Cast Zamak® construction with polished chrome finish
 - For 1-5/8" door offset
 - Non-Handed – cam is field reversible for left or right hand door applications
 - Adjustable to compensate for gasket wear
- Hold Open Feature – dwell in cam allows door to remain open at 120-degrees for easy loading/unloading of product
- Overclose Feature – provides constant door pressure to insure a full gasket seal



For 1-5/8" Door Offset
R51-2000



Contact Switch
For 1-5/8" Door Offset
R51-2000-CS
PATENT 9,970,224



Plunger Switch
For 1-5/8" Door Offset
R51-2000-RS

For more information go to page B49

Stainless Steel Leg Socket with Triangular Mounting Plate

- Permits KD shipping to reduce freight costs
- Type 304 stainless steel construction for strength, corrosion resistance and easy welding
 - Sturdy 14-gauge mounting plate with 1/2" turn down
 - Full 360-degree weld on leg socket for added strength
- 2" OD, 16-gauge leg socket for 1-5/8" OD round tubing applications
 - Satin stainless steel finish
- Supplied with one 5/16-24 x 5/16" long set screw to secure leg during installation




For 1-5/8" OD Round Tubing Applications
A18-0306-C

For more information go to page E113

LED Security Lock

- High polish chrome finish
 - Easy installation
- Vertical and horizontal adjustments
- Four-disc cylinder provides extra security
 - Black plastic caps included
- Compatible with glass and most other doors

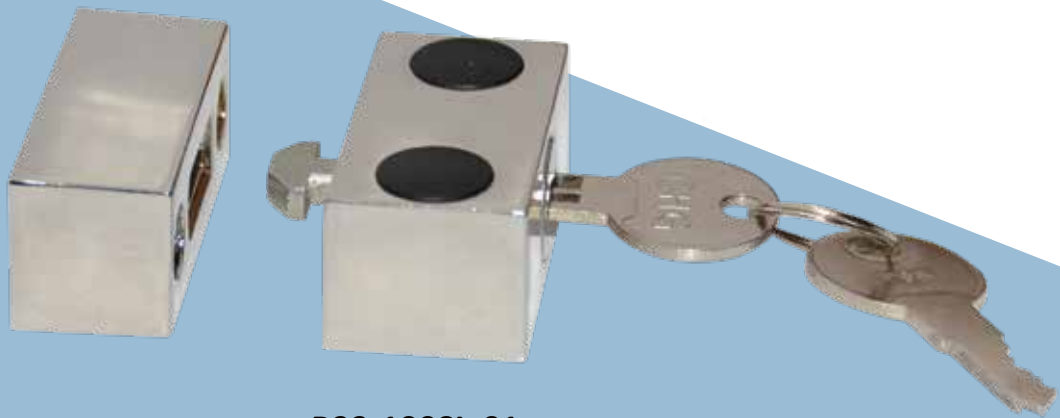


P99-100SL-01

For more information go to page B55



COOKING HOOD

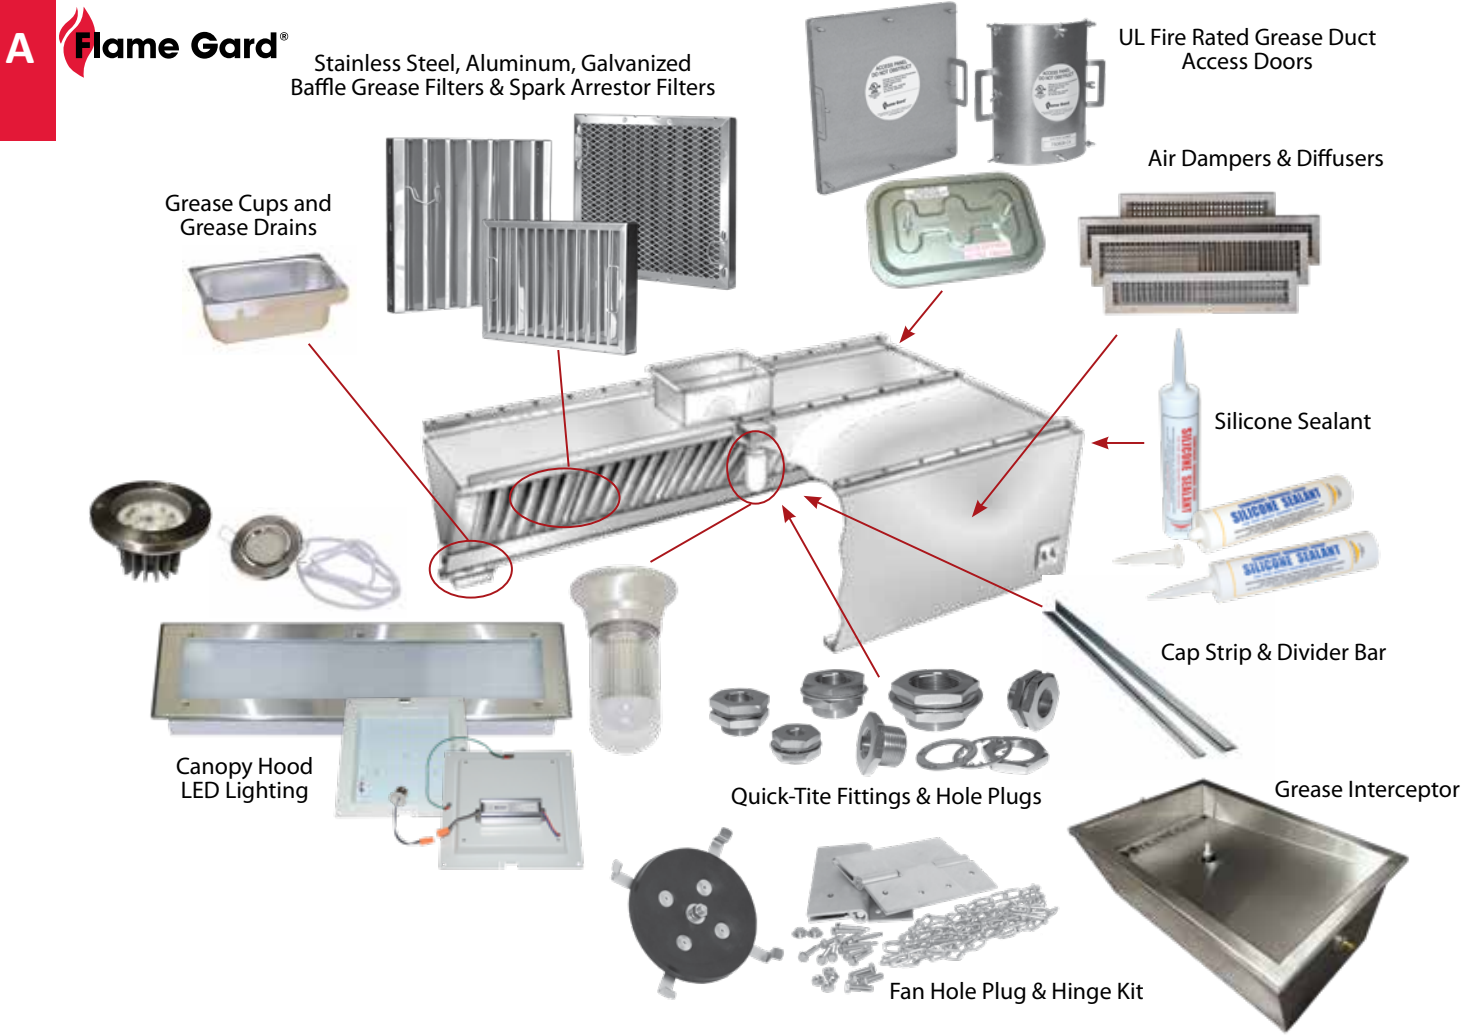

BAFFLE GREASE FILTERS	A15	GREASE INTERCEPTOR	A28
HOOD SIZING GUIDE	A16-A17	GASKET REPAIR KIT, ACCESS PANELS AND HI-TEMP ACCESS DOORS	A29
TYPE III FILTERS	A18	FLAT ACCESS DOORS	A30
TYPE VI FILTERS	A19-A20	CURVED ACCESS DOORS	A31
MESH FILTERS	A21	ORDER FORM-CUSTOM FLAT ACCESS DOORS	A32
MOLDING & DIVIDERS	A22	ORDER FORM-CURVED ACCESS DOORS	A33
GREASE CUPS	A23	ORDER FORM-CUSTOM CURVED ACCESS DOORS	A34
QUICK-TITE® FITTINGS	A24-A25		
QUICK-TITE® HOLE PLUGS	A25		
FAN HINGES & MULTI-VALVE DAMPERS	A26		
SILICONE SEALANT, TAPE, HANGERS & WELD PINS	A27		

For Lighting Components, please see Lighting & Electrical on pages D95- D111

Grease filters play a critical role in the overall safety and effectiveness of a kitchen exhaust system. Filters should be carefully selected to provide the correct volume of air through the ventilator, which is determined by the size of hood, the cooking equipment under it and state or local code requirements. There are many manufacturers of grease filters but not all filters have UL Listing. For ultimate safety of the exhaust system and to minimize liability issues, be sure that the filters that you select are UL Listed. This ensures that they meet NFPA standards.



ALL COMPONENT HARDWARE GREASE FILTERS ARE UL AND NSF LISTED AND MEET NFPA 96 STANDARDS.

Working in concert with the surface fire suppression system, grease filters provide a strong defense against catastrophic duct system fires. Filters are designed to remove most of the grease from the airstream before it enters the ductwork. The grease runs off the baffles into a collection device where it can be easily removed. Selecting the proper number of the correct size filters is most important to ensure that the balance of the exhaust system will not be compromised and that all of the exhaust air passes through the filters before entering the ductwork.

HOW TO ORDER COMPONENT HARDWARE FILTERS

Filters MUST be installed with baffles running in the vertical (top to bottom) position so the grease will run down the baffles to the grease trough in the hood.

Standard sizes are ordered with the VERTICAL (top to bottom) dimension first, then the HORIZONTAL (left to right) dimension.

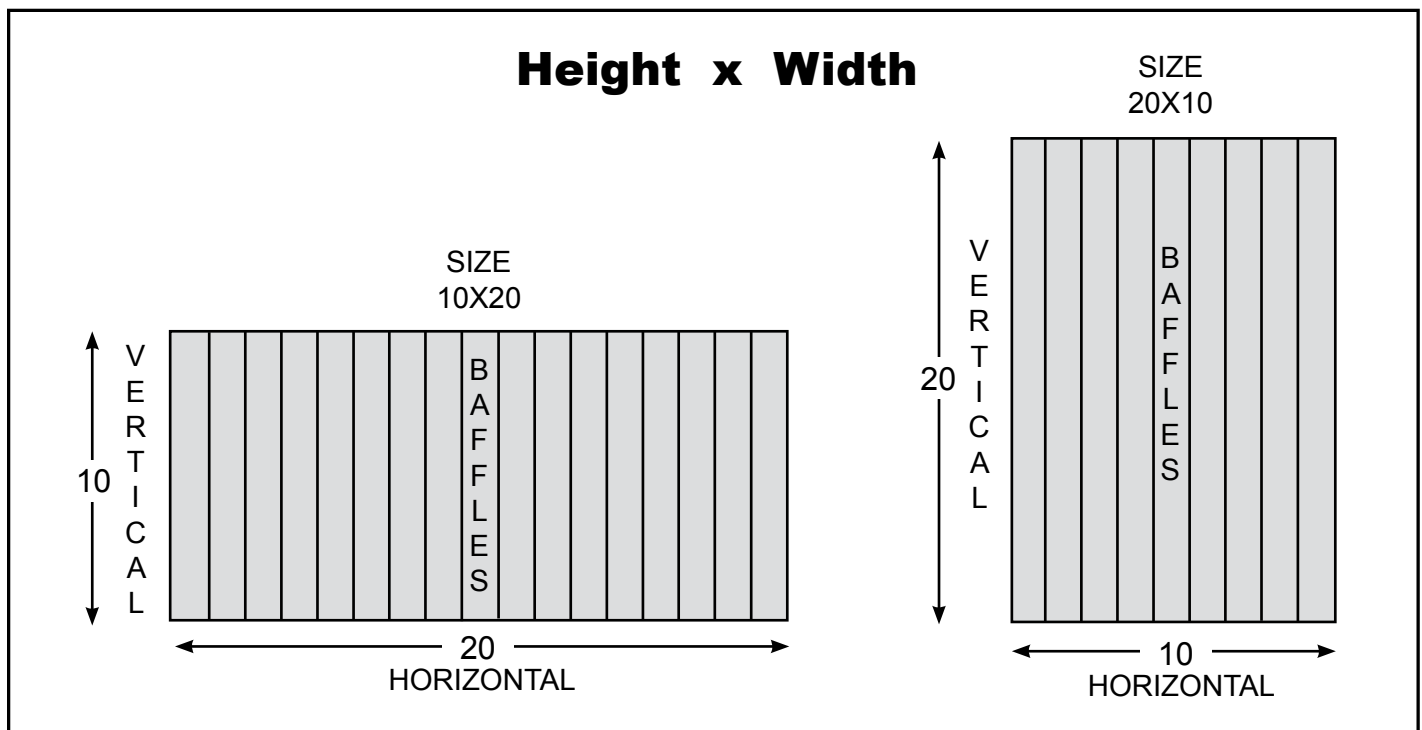

ALL FILTERS ARE AVAILABLE WITH SPECIAL LOCKING HANDLES.




FILTERS AVAILABLE WITH HOOK FOR USE IN CAPTIVE-AIRE STYLE HOODS.

In order to choose the correct filter for a particular kitchen requirement, the following steps are suggested for good hood design. These steps assume a hood seven feet or less above the floor using our Type II baffle grease filters.

STEP ONE - DETERMINE HOOD SIZE

For economy, the hood should be as small as possible. Therefore, there should be no work surfaces or blank spots between cooking surfaces. The hood should extend 6" beyond the cooking surface on all open sides. For example, an island canopy, open on four sides over a 42" x 72" grill, would have to be 54" x 84". A wall canopy over the same grill would have to be 48" x 84". A corner wall canopy would be 48" x 78".

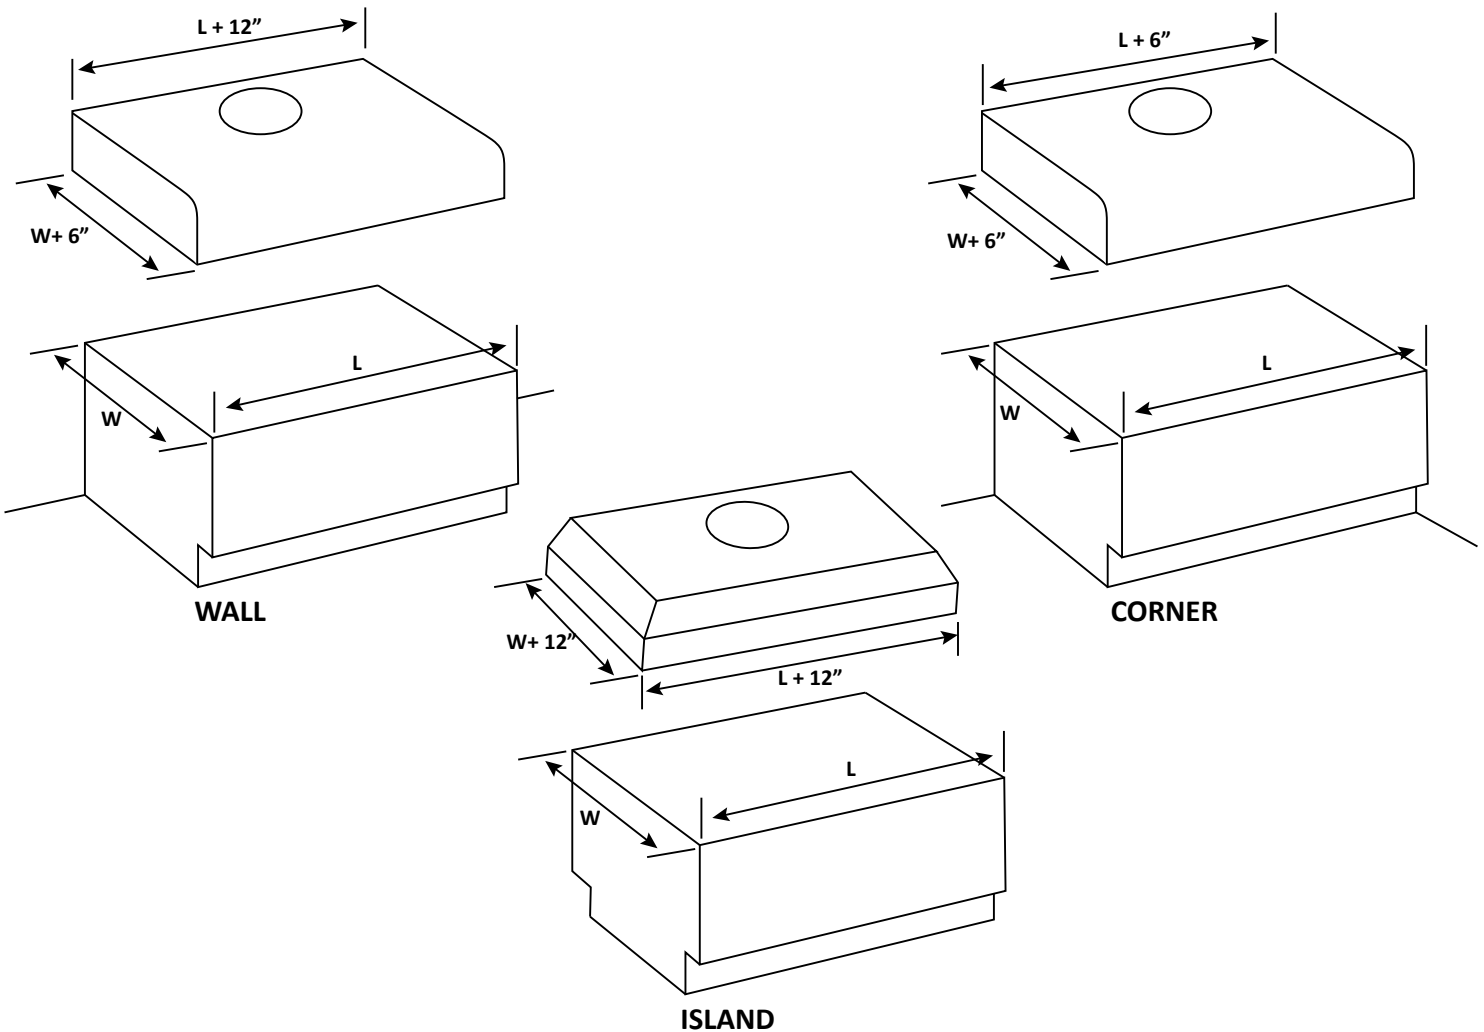

STEP TWO - DETERMINE EXHAUST VOLUME REQUIRED

Many states and local authorities have established codes requiring certain standards for exhaust air at kitchen hoods. In 1973, the NFPA 96 Standard for Total Exhaust Volume at an island type hood (open on four sides) was suggested at:

$$\text{Total Exhaust Volume} = 150 \times \text{Entrance Area of Hood}$$

For a wall hood (open on three sides), the code was:

$$\text{Total Exhaust Volume} = 100 \times \text{Entrance Area of Hood}$$

However, in 1976, NFPA 96 was revised, removing these formula and replacing them with a paragraph which gives more flexibility to the designer, but also assigns him the responsibility for determining the correct Total Exhaust Volume. The code in part says: "...exhaust air volumes for hoods shall be of sufficient level to provide for capture and removal of grease, but retain cooking vapors. Test data or performance acceptable to the authority having jurisdiction, or both, shall be provided or displayed, or both, upon request."

This wording allows a wide latitude of exhaust volumes, enabling the designer to suit the hood to the cooking situation. It is urged that the designer experiment with exhaust volumes, varying them until the proper volume is reached. This will inevitably result in reduced air movement requirements - less, in fact, than the so-called "safe formula" (Total Exhaust Volume = 100 x Entrance Area of Hood). A reduction of 25 to 50% of Total Exhaust Volume is often possible and has worked quite successfully in all types of cooking, from steam table operation to char-broilers. The savings in blower size and conditioned air exhausted can be considerable.

STEP THREE - DETERMINE THE NUMBER OF FILTERS TO BE USED IN THE HOOD

Using either 20" or 25" widths which are standard sizes, select the best combination to fill the hood. On an 84" wall hood, for instance, three 25" wide filters would be 75" long, four 20" filters would be 80" long, and three 20" wide filters plus one 5" filter would be 85". This would be too wide, so four 20" filters would be the right choice.

STEP FOUR - DETERMINE THE VOLUME OF AIR PER FILTER

Once the Total Volume in Step Two has been determined, divide that Volume by the Number of filters in Step Three. For example, using the "safe formula" of 100 x the Open Area (in feet) on a 48" x 84" wall hood, the Total Exhaust Volume (T.E.V.) would be:

$$\begin{aligned} \text{T.E.V.} &= 100 \times 48/12 \times 84/12 = 100 \times 4 \times 7 = 2800 \text{ C.F.M.} \\ \text{Dividing this by 4 (for 4 filters) would yield } &700 \text{ C.F.M. per filter.} \\ &\frac{2800}{4 \text{ filters}} = 700 \text{ C.F.M. per filter} \end{aligned}$$

STEP FIVE - DETERMINE THE HEIGHT OF THE FILTERS REQUIRED

This is a very important step and frequently overlooked. It must be remembered that a greater filter height means a lower Velocity and Static Pressure for the same C.F.M. per filter.



Divide the C.F.M. per filter from Step Four by the Effective Area of each different Height filter to be considered and the result will be the Velocity in feet per minute. (Note: Use the Effective Area/Chart for the particular type filter selected.) Example:

$$\begin{aligned} 700 \text{ C.F.M.} \div 2.88 \text{ sq. ft. for } 25 \times 20 &= 243 \text{ F.P.M.} \\ 700 \text{ C.F.M.} \div 2.25 \text{ sq. ft. for } 20 \times 20 &= 311 \text{ F.P.M.} \\ 700 \text{ C.F.M.} \div 1.75 \text{ sq. ft. for } 16 \times 20 &= 400 \text{ F.P.M.} \end{aligned}$$

Since the Type II Filters (for example) have excellent grease capture at velocities ranging from 200 to 500 F.P.M., any of these three would be used. However, it may be seen on the Static Pressure chart that the Static Pressure at 700 C.F.M. per filter is .410 for 25 x 20, .725 for 20 x 20, and 1.075 for 16 x 20. It is easily seen that the 25" high filter should be used if there is sufficient room. If a 20", or even a 16" height is maximum, then the Static Pressure penalty must be paid. (Note: Use the Static Pressure for the particular type filter selected.)

Once the filter and air volume requirements are determined, additional calculations are necessary to compensate for losses in entry, hood, transition, fan and exhaust exit. The compensating adjustments allow for the proper sizing of the fan and blower motor.

The final step required is to provide for make-up air to replace that which is exhausted.

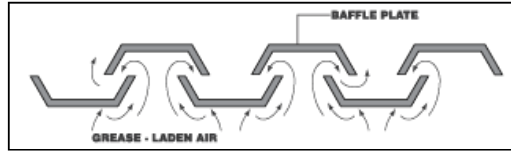

FULL FILTER HEIGHT BAFFLES AND "FRAMELESS" CONSTRUCTION MAXIMIZE THE AVAILABLE CAPTURE AREA WHILE INCREASING THE FILTER'S FREE AREA.

TYPE III - STANDARD FIXED HEAVY DUTY STAINLESS STEEL BAFFLE


MODEL NO.	NOMINAL SIZE - H X W	ACTUAL SIZE - H X W X D	WT. PER FILTER
301616	16 x 16 (406mm x 406mm)	15-1/2 x 15-1/2 x 1-5/8	5.38 lbs (2.44 kg)
301620	16 x 20 (406mm x 508mm)	15-1/2 x 19-1/2 x 1-5/8	6.5 lbs (2.95 kg)
301625	16 x 25 (406mm x 635mm)	15-1/2 x 24-1/2 x 1-5/8	8 lbs (3.63 kg)
302016	20 x 16 (508mm x 406mm)	19-1/2 x 15-1/2 x 1-5/8	6.5 lbs (2.95 kg)
302020	20 x 20 (508mm x 508mm)	19-1/2 x 19-1/2 x 1-5/8	7.75 lbs (3.52 kg)
302025	20 x 25 (508mm x 635mm)	19-1/2 x 24-1/2 x 1-5/8	9.5 lbs (4.31 kg)

Holes for handles and brackets installed with filter purchase. All filters are available with special locking handles. **Add suffix "-MH"** to model number. Filters available with hook for use in Captive-Aire style hoods. **Add suffix "-H"** to model number.

CFM - Static Pressure Static Pressure - Inches of H2O

	10 x 16	10 x 20	16 x 16	16 x 20	16 x 25	20 x 16	20 x 20	20 x 25	25 x 16	25 x 20
200	.34	.19	.12	.07	.05	.09	.04	.03	.05	.03
300	.84	.48	.33	.19	.12	.23	.11	.07	.13	.07
400	1.46	.83	.57	.33	.21	.41	.19	.13	.23	.13
500	2.27	1.28	.86	.50	.32	.61	.29	.195	.355	.195
600	3.27	1.86	1.27	.73	.46	.90	.42	.28	.52	.29
700	4.45	2.53	1.73	.99	.63	1.23	.57	.38	.70	.39
800	5.73	3.32	2.26	1.30	.82	1.59	.74	.49	.92	.505
900	7.38	4.19	2.87	1.64	1.04	2.04	.94	.64	1.17	.65
1000	9.13	5.15	3.47	2.03	1.28	2.49	1.17	.78	1.425	.79
1100		6.24	4.27	2.44	1.55	3.04	1.40	.95	1.74	.97
1200		7.38	5.08	2.92	1.84	3.59	1.67	1.13	2.07	1.15
1300		8.74	5.98	3.42	2.17	4.26	1.97	1.33	2.44	1.35
1400			6.92	3.95	2.52	4.93	2.28	1.54	2.82	1.56
1500			7.95	4.55	2.89	5.66	2.61	1.77	3.24	1.80

ALL TESTS CONDUCTED BY CEDRT-AIRE TECHNICAL SERVICES TO AMCA STANDARD 500-89



CFM –STATIC PRESSURE

STATIC PRESSURE – INCHES OF H2O

Size	10 x 16	10 x 20	12 x 16	12 x 20	16 x 16	16 x 20	16 x 25	20 x 16	20 x 20	20 x 25	25 x 16	25 x 20
200	.32	.16	.21	.11	.12	.06	.04	.07	.04	.05	.04	.02
250	.48	.25	.33	.17	.18	.09	.06	.11	.06	.09	.07	.04
300	.70	.35	.47	.25	.26	.13	.09	.16	.09	.12	.10	.06
350	.93	.48	.64	.34	.35	.18	.12	.21	.12	.17	.14	.08
400	1.22	.62	.83	.44	.46	.24	.16	.28	.16	.22	.18	.10
450	1.55	.79	1.05	.56	.58	.30	.20	.35	.20	.28	.23	.13
500	1.90	.97	1.29	.69	.71	.37	.25	.44	.25	.35	.28	.16
550	2.31	1.17	1.57	.83	.86	.45	.30	.52	.30	.42	.34	.19
600	2.73	1.40	1.85	.99	1.02	.53	.36	.61	.35	.50	.40	.22
650	3.22	1.64	2.20	1.16	1.20	.62	.42	.71	.41	.59	.47	.25
700	3.76	1.92	2.53	1.35	1.39	.72	.49	.81	.47	.68	.55	.29
750	4.31	2.19	2.92	1.56	1.61	.84	.56	.93	.55	.78	.63	.34
800	4.90	2.50	3.39	1.80	1.82	.96	.64	1.10	.63	.90	.72	.38
850	5.52	2.82	3.86	2.00	2.07	1.06	.71	1.22	.71	1.00	.80	.43
900	6.20	3.13	4.31	2.24	2.28	1.18	.79	1.39	.79	1.15	.89	.48
950	6.84	3.50	4.78	2.48	2.52	1.29	.88	1.52	.90	1.27	.99	.53
1000	7.58	3.88	5.31	2.75	2.81	1.42	.98	1.69	.98	1.40	1.10	.59

CFM PER FILTER – (75F AIR)



FOR TYPE VI FILTERS

- STAINLESS STEEL
- CONVERTS STANDARD FILTER FOR USE IN CAPTIVE AIR HOODS

MODEL NO.	QTY
FR51-X015	1 Pair

TYPE VI Filters – Stainless Steel & Galvanized

A



TYPE VI - STAINLESS STEEL BAFFLE GREASE FILTERS

MODEL NO.	NOMINAL SIZE - H X W	ACTUAL SIZE - H X W X D	WT. PER FILTER
FR51-1016	10" x 16" (254mm x 406mm)	9-5/8" x 15-3/4" x 1-3/4"	2.6 lbs (1.2 kg)
FR51-1020	10" x 20" (254mm x 508mm)	9-5/8" x 19-5/8" x 1-3/4"	3.2 lbs (1.5 kg)
FR51-1216	12" x 16" (305mm x 406mm)	11-5/8" x 15-3/4" x 1-3/4"	3.0 lbs (1.4 kg)
FR51-1220	12" x 20" (305mm x 508mm)	11-5/8" x 19-5/8" x 1-3/4"	3.6 lbs (1.7 kg)
FR51-1616	16" x 16" (406mm x 406mm)	15-3/4" x 15-3/4" x 1-3/4"	3.8 lbs (1.8 kg)
FR51-1620	16" x 20" (406mm x 508mm)	15-3/4" x 19-5/8" x 1-3/4"	4.5 lbs (2.1 kg)
FR51-1625	16" x 25" (406mm x 635mm)	15-3/4" x 24-5/8" x 1-3/4"	5.6 lbs (2.6 kg)
FR51-2016	20" x 16" (508mm x 406mm)	19-5/8" x 15-3/4" x 1-3/4"	4.6 lbs (2.1 kg)
FR51-2020	20" x 20" (508mm x 508mm)	19-5/8" x 19-5/8" x 1-3/4"	5.5 lbs (2.5 kg)
FR51-2025	20" x 25" (508mm x 635mm)	19-5/8" x 24-5/8" x 1-3/4"	6.7 lbs (3.1 kg)
FR51-2516	25" x 16" (635mm x 406mm)	24-5/8" x 15-3/4" x 1-3/4"	5.7 lbs (2.6 kg)
FR51-2520	25" x 20" (635mm x 508mm)	24-5/8" x 19-5/8" x 1-3/4"	6.8 lbs (3.1 kg)



TYPE VI - GALVANIZED BAFFLE GREASE FILTERS

MODEL NO.	NOMINAL SIZE - H X W	ACTUAL SIZE - H X W X D	WT. PER FILTER
FG51-1020	10" x 20" (254mm x 508mm)	9-5/8" x 19-5/8" x 1-3/4"	3.2 lbs (1.5 kg)
FG51-1220	12" x 20" (305mm x 508mm)	11-5/8" x 19-5/8" x 1-3/4"	3.6 lbs (1.7 kg)
FG51-1616	16" x 16" (406mm x 406mm)	15-3/4" x 15-3/4" x 1-3/4"	3.8 lbs (1.8 kg)
FG51-1620	16" x 20" (406mm x 508mm)	15-3/4" x 19-5/8" x 1-3/4"	4.5 lbs (2.1 kg)
FG51-1625	16" x 25" (406mm x 635mm)	15-3/4" x 24-5/8" x 1-3/4"	5.6 lbs (2.6 kg)
FG51-2016	20" x 16" (508mm x 406mm)	19-5/8" x 15-3/4" x 1-3/4"	4.6 lbs (2.1 kg)
FG51-2020	20" x 20" (508mm x 508mm)	19-5/8" x 19-5/8" x 1-3/4"	5.5 lbs (2.5 kg)
FG51-2025	20" x 25" (508mm x 635mm)	19-5/8" x 24-5/8" x 1-3/4"	6.7 lbs (3.1 kg)
FG51-2516	25" x 16" (635mm x 406mm)	24-5/8" x 15-3/4" x 1-3/4"	5.7 lbs (2.6 kg)
FG51-2520	25" x 20" (635mm x 508mm)	24-5/8" x 19-5/8" x 1-3/4"	6.8 lbs (3.1 kg)



TYPE VI - ALUMINUM BAFFLE GREASE FILTERS

MODEL NO.	NOMINAL SIZE - H X W	ACTUAL SIZE - H X W X D	WT. PER FILTER
FA51-1016	10" x 16" (254mm x 406mm)	9-5/8" x 15-3/4" x 1-3/4"	1.0 lbs (0.5 kg)
FA51-1020	10" x 20" (254mm x 508mm)	9-5/8" x 19-5/8" x 1-3/4"	1.2 lbs (0.6 kg)
FA51-1216	12" x 16" (305mm x 406mm)	11-5/8" x 15-3/4" x 1-3/4"	1.1 lbs (0.6 kg)
FA51-1220	12" x 20" (305mm x 508mm)	11-5/8" x 19-5/8" x 1-3/4"	1.4 lbs (0.7 kg)
FA51-1616	16" x 16" (406mm x 406mm)	15-3/4" x 15-3/4" x 1-3/4"	1.4 lbs (0.7 kg)
FA51-1620	16" x 20" (406mm x 508mm)	15-3/4" x 19-5/8" x 1-3/4"	1.7 lbs (0.8 kg)
FA51-1625	16" x 25" (406mm x 635mm)	15-3/4" x 24-5/8" x 1-3/4"	2.1 lbs (1.0 kg)
FA51-2016	20" x 16" (508mm x 406mm)	19-5/8" x 15-3/4" x 1-3/4"	1.7 lbs (0.8 kg)
FA51-2020	20" x 20" (508mm x 508mm)	19-5/8" x 19-5/8" x 1-3/4"	2.1 lbs (1.0 kg)
FA51-2025	20" x 25" (508mm x 635mm)	19-5/8" x 24-5/8" x 1-3/4"	2.5 lbs (1.2 kg)
FA51-2520	25" x 20" (635mm x 508mm)	24-5/8" x 19-5/8" x 1-3/4"	2.5 lbs (1.2 kg)



Holes for handles and brackets installed with filter purchase. All filters are available with special locking handles.


Add suffix "-MH" to model number. Mounting clips required for Captive Aire hoods – FR51-X015 (pair).



MESH TYPE AIR FILTERS
STANDARD COMMERCIAL SIZES AVAILABLE IN
ALUMINUM and GALVANIZED STEEL FRAMED MODELS

- RIGID HEAVY DUTY CONSTRUCTION • BEST PRICING
- CORROSION RESISTANT • ALL STEEL WIRE MESH DESIGN FOR MAXIMUM CAPTURE OF DUST PARTICLES

HEIGHT & WIDTH		ALUMINUM FRAMED		GALVANIZED STEEL FRAMED	
SIZE: INCHES (mm)	MODEL NO.	PACKAGE WGT: LBS. (kg)	MODEL NO.	PACKAGE WGT: LBS. (kg)	
10 x 20 (254 x 508)	F40-1020	11 (5)	F41-1020	14 (6)	
16 x 20 (406 x 508)	F40-1620	18 (8)	F41-1620	23 (10)	
16 x 25 (406 x 635)	F40-1625	22 (10)	F41-1625	28(13)	
20 x 20 (508 x 508)	F40-2020	22 (10)	F41-2020	28 (13)	
20 x 25 (508 x 635)	F40-2025	26 (12)	F41-2025	33 (15)	

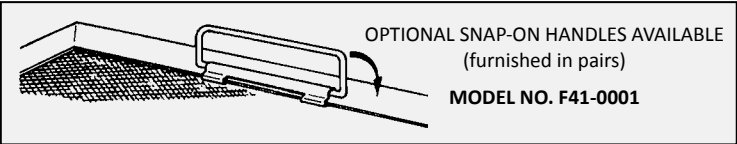


NOTE: Standard package consists of six filters. Nominal thickness is 2" (51mm). Actual thickness is 1-3/4"(44mm). Actual height and width are 7/16"(11mm) less than nominal sizes listed. Special size filters and 1"(25mm) filters are furnished without handles. Lift handles are available on application. All stainless steel (frame and media) models available on application.



AIR DELIVERY DATA CHART						
NET FACE VELOCITY	RESISTANCE IN INCHES OF W.G.		CFM CAPACITY BY SIZE			
	NOMINAL THICKNESS					
FPM	1" INCH	2" INCH	16 x 20	16 x 25	20 x 20	20 x 25
267	.025	.020	467	597	600	768
356	.040	.038	623	796	800	1024
445	.067	.060	779	995	1000	1279
533	.100	.090	933	1192	1200	1532
622	.142	.129	1089	1391	1400	1788
711	---	.169	1244	1590	1600	2044
800	---	.218	1400	178	1800	2300

MOULDINGS AND DIVIDERS


- NEW EXTRA WIDE PROFILE FOR EASIER INSTALLATION • ALL STAINLESS STEEL CONSTRUCTION • ACCEPTS 1/16" (1.6mm) WALL FLASHING MATERIAL • GRAIN OF FINISH MATCHES WALL LINING • AVAILABLE IN VARIOUS LENGTHS TO MINIMIZE SCRAP
- INDIVIDUALLY PLASTIC SLEEVED FOR PROTECTION OF FINISH • CAP STRIP HAS HEMMED EDGE FOR SAFETY





STAINLESS STEEL CAP STRIP FOR 1/16" (1.6mm) MATERIAL, #4 SATIN FINISH
MODEL NO. J63-1451
 7 FT (2.1m) LENGTH
MODEL NO. J63-1451-8
 8 FT (2.4m) LENGTH
MODEL NO. J63-1451-9
 9 FT (2.7m) LENGTH
MODEL NO. J63-1451-10
 10 FT (3m) LENGTH

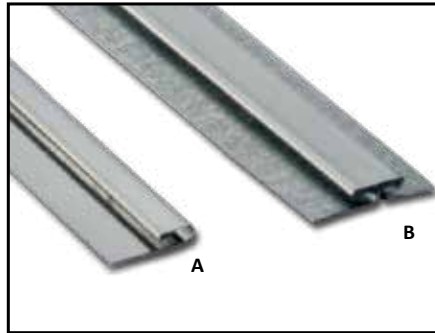


STAINLESS STEEL DIVIDER BAR WITH GALVANIZED BACK PLATE FOR 1/16" (1.6mm) MATERIAL, BRIGHT FINISH
MODEL NO. J64-1450
 7 FT (2.1m) LENGTH
MODEL NO. J64-1450-8
 8 FT (2.4m) LENGTH
MODEL NO. J64-1450-9
 9 FT (2.7m) LENGTH
MODEL NO. J64-1450-10
 10 FT (3m) LENGTH





EXTENDED LENGTH STAINLESS STEEL CAP STRIP FOR 1/16" (1.6mm) MATERIAL, #4 SATIN FINISH
MODEL NO. J63-1651-78
 6.5 FT (2m) LENGTH
MODEL NO. J63-1651-120
 10 FT (3m) LENGTH

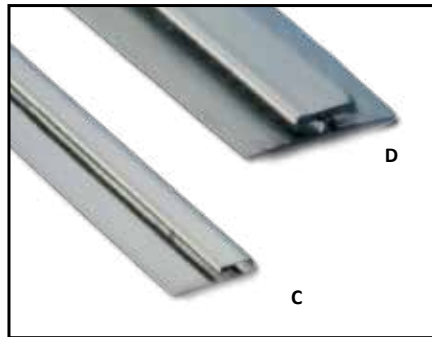

EXTENDED LENGTH STAINLESS STEEL DIVIDER BAR WITH S/S BACK PLATE FOR 1/16" (1.6mm) MATERIAL, #4 SATIN FINISH
MODEL NO. J64-1651-78
 6.5 FT (2m) LENGTH
MODEL NO. J64-1651-120
 10 FT (3m) LENGTH



EXTENDED WIDE 304 STAINLESS STEEL CAP STRIP FOR 1/16" (1.6mm) MATERIAL, #4 SATIN FINISH
MODEL NO. J63-2651-84
 7 ft (2.1m) LENGTH
MODEL NO. J63-2651-120
 10 ft (3m) LENGTH

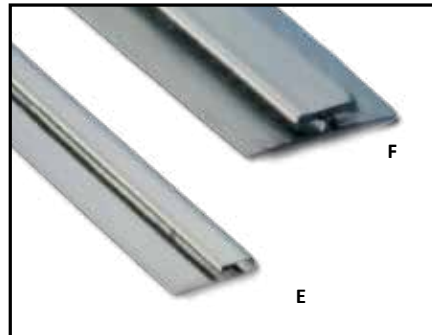

EXTENDED WIDE 304 STAINLESS STEEL DIVIDER BAR WITH S/S BACK PLATE FOR 1/16" (1.6mm) MATERIAL #4 SATIN FINISH
MODEL NO. J64-2651-84
 7 ft (2.1m) LENGTH
MODEL NO. J64-2651-120
 10 ft (3m) LENGTH


REMOVABLE STAINLESS STEEL CANOPY HOOD GREASE CUPS

- CONFORMS TO NFPA REQUIREMENTS



**KEYHOLE MOUNT CUP
MODEL NO. F15-4000-C**


Size: 4" x 6-5/8" x 4" DEEP
(102mm x 168mm x 102mm)

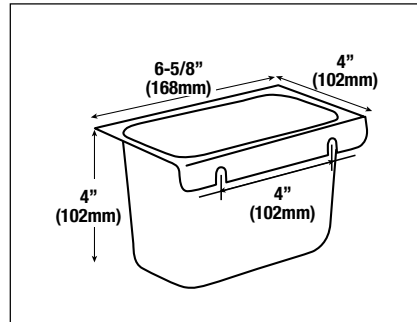

**KEYHOLE MOUNT CUP
MODEL NO. F15-2500-C**


Size: 4" x 6-3/4" x 2-1/2" DEEP
(102mm x 171mm x 64mm)

10° MOUNTING
ANGLE

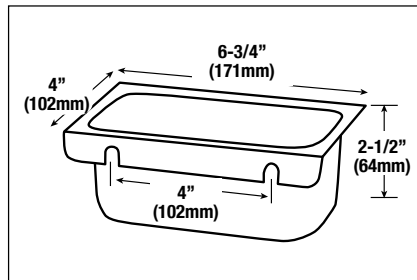

**SIDE MOUNT CUP
MODEL NO. F15-0019**


Size: 4-1/4" x 6-3/4" x 2-1/2" DEEP
(108mm x 171mm x 64mm)

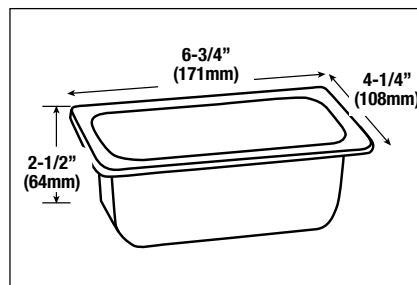

**NICKEL PLATED BRASS
CANOPY HOOD DRAIN**

- DESIGNED FOR DRAINING GREASE FROM TROUGH TO GREASE CUP
- SUPPLIED WITH LOCKNUT AND WASHER
- FITS 1/2" (13mm) I.D. HOSE OR 3/8" (9.5mm) O.D. TUBING


MODEL NO. F10-1187

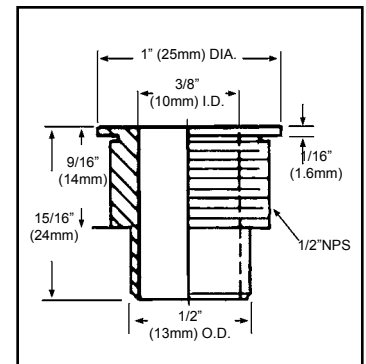

**STAINLESS STEEL KEYHOLE
WELD STUDS**


- MOUNTING KEYHOLE GREASE CUPS

MODEL NO. Q37-0250

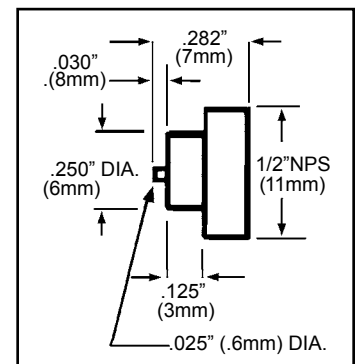



- USED AS THROUGH-PENETRATION FITTINGS IN COOKING HOOD SYSTEMS
- PROVIDES STRUCTURAL SUPPORT FOR THE SYSTEM PIPING, IMPROVING SYSTEM INTEGRITY AND REDUCING THE NEED FOR ADDITIONAL PIPE HANGERS
- PRESSURE TESTED TO 5000 PSI
- IN CONFORMANCE WITH THE REQUIREMENTS OF NFPA STANDARD NO. 96
- MANUFACTURED OF SOLID MACHINED STEEL FOR SUPERIOR STRENGTH AND HIGH TEMPERATURE RESISTANCE
- ATTRACTIVE CHROME PLATED FINISH MAXIMIZES CORROSION RESISTANCE
- INTERNAL PIPE THREADS PERMIT EASY COUPLING OF THE PIPES AT THE POINT OF PENETRATION

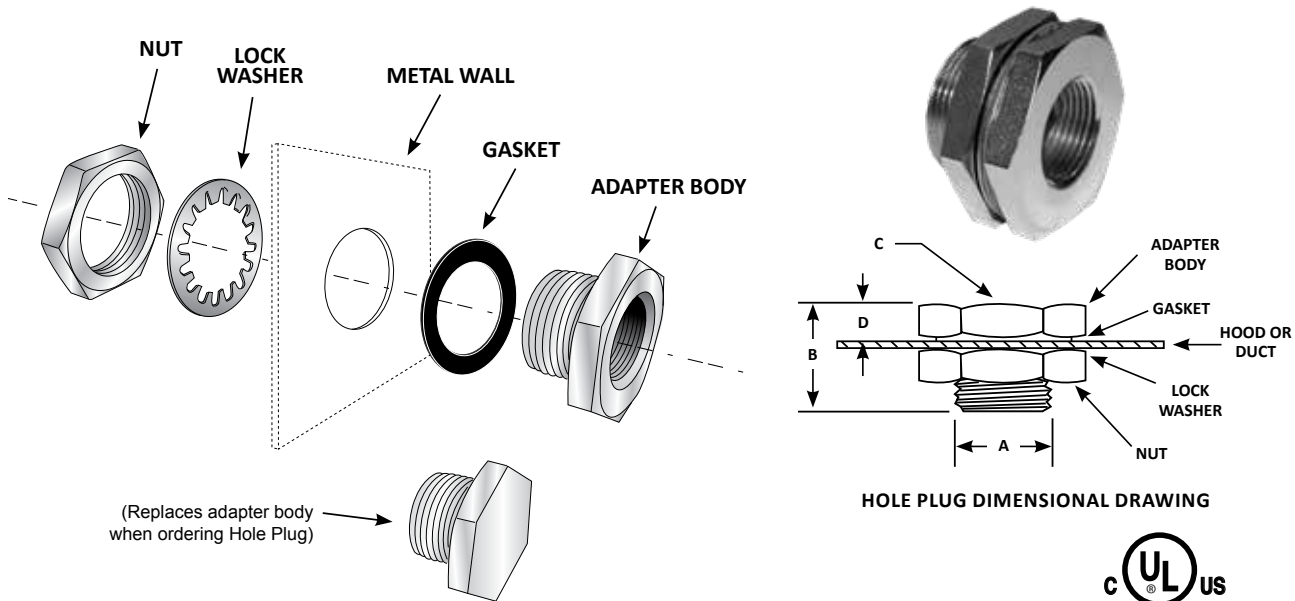

HOLE PLUG DIMENSIONAL DRAWING





STANDARD FITTINGS

MODEL NO.	QUICK-TITE FITTING	HOLE CUT OUT SIZE (A)	WT. PER FITTING	B	C	D
F11-0014	1/4" NPSM Pipe	3/4" (19mm)	.15 lb (.07 kg)	.88	1.125 HEX	.31
F11-0038	3/8" NPT Pipe	1-1/8" (29mm)	.36 lb (.16 kg)	1.00	1.5 HEX	.37
F11-0012	1/2" NPT Pipe	1-1/8" (29mm)	.35 lb (.16 kg)	1.14	1.5 HEX	.37
F11-0034	3/4" NPT Pipe	1-3/8" (35mm)	.52 lb (.24 kg)	1.26	1.88 HEX	.37
F11-0100	1" NPT Pipe	1-5/8" (41mm)	.852 lb (39 kg)	1.5	2.25 HEX	.44
F11-0114	1-1/4" NPT Pipe	2" (51mm)	.97 lb (.44 kg)	1.5	2.5 HEX	.44
F11-0112	1-1/2" NPT Pipe	2-1/4" (57mm)	1.18 lbs (.54 kg)	1.5	2.75 HEX	.44

CORNER PULLEYS

F11-0012A	7/8"-20 x 1/2" NPT	.97 lb (.44 kg)	1.14	1.5 HEX	.37
F11-0012B	15/16"-20 x 1/2" NPT	1.18 lbs (.54 kg)	1.14	1.5 HEX	.37

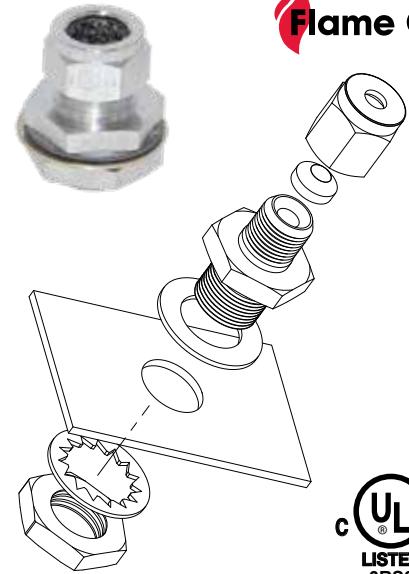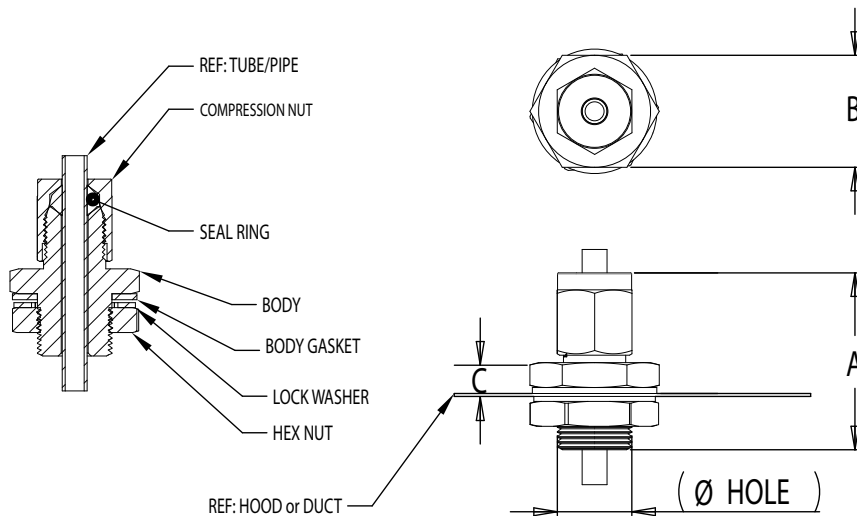

COMPRESSION FITTINGS

MODEL NO.	QUICK-TITE FITTING	HOLE CUT OUT SIZE	WT. PER FITTING	A	B	C
F15-250T	1/4" (6mm) Tube	3/4" (19mm)	.15 lb (.07 kg)	1.8	1.125 HEX	.31
F15-375T	3/8" (10mm) Tube	3/4" (19mm)	.36 lb (.16 kg)	1.8	1.125 HEX	.31
F15-500T250P	1/2" (13mm) Tube & 1/4" (6mm) Pipe	3/4" (19mm)	.21 lb (10 kg)	1.8	1.125 HEX	.31
F15-625T375P	5/8" (16mm) Tube & 3/8" (10mm) Pipe	1-1/8" (29mm)	.35 lb (.16 kg)	2.0	1.5 HEX	.37
F15-500EMT	1/2" (13mm) EMT Conduit	1-1/8" (29mm)	.52 lb (24 kg)	2.0	1.5 HEX	.37
F15-500P	1/2" (13mm) Pipe	1-1/8" (29mm)	.852 lb (39 kg)	2.08	1.5 HEX	.37
F15-750P	3/4" (19mm) Pipe	1-3/8" (35mm)	.97 lb (.44 kg)	2.37	1.875 HEX	.37
F15-1000P	1" (25mm) Pipe	1-5/8" (41mm)	1.18 lbs (.54 kg)	2.5	2.25 HEX	.44



QUICK-TITE® HOLE PLUGS

- QUICK-TITE HOLE PLUGS ARE DESIGNED TO PROVIDE A POSITIVE SEAL OR PATCH FOR EXISTING PENETRATIONS THAT ARE NO LONGER REQUIRED
- IDEAL TO REPAIR UNWANTED HOLES AS A RESULT OF CHANGES TO A FIRE PROTECTION SYSTEM, MOVING THE LOCATION OF A FIRE SUPPRESSION NOZZLE, DRILLING A HOLE AT THE WRONG LOCATION OR USING A HOOD/DUCT WITH PREVIOUSLY DRILLED HOLES
- QUICK-TITE HOLE PLUGS ARE EASY TO INSTALL AND PROVIDE AN ATTRACTIVE, FINISHED APPEARANCE TO MATCH FITTINGS
- AVAILABLE FOR FIVE STANDARD HOLE SIZES - 3/4", 7/8", 1-1/8", 1-3/8", AND 1-5/8"

MODEL NO.	HOLE SIZE	WT. PER HOLE PLUG
F12-0034	3/4" (19mm) to 7/8" (22mm)	3.2 oz (91 g)
F12-0078	7/8" (22mm) to 1" (25mm)	4.8 oz (136 g)
F12-0118	1-1/8" (29mm) to 1-5/16" (33mm)	7.2 oz (204 g)
F12-0138	1-3/8" (35mm) to 1-9/16" (40mm)	12.8 oz (363 g)
F12-0158	1-5/8" (41mm) to 1-7/8" (48mm)	21.6 oz (612 g)



QUICK-TITE® PITOT TUBE TEST PORT

- 1/2" THREADED PLUG PROVIDES EASY ACCESS FOR STANDARD SIZE PITOT TUBE AIR BALANCING INSTRUMENTS
- SPECIFICALLY DESIGNED FOR COMMERCIAL GREASE DUCTS
- HIGH TEMPERATURE GASKET FOR A LIQUID-TIGHT SEAL
- SOLID MACHINED STEEL CONSTRUCTION FOR SUPERIOR STRENGTH AND HIGH TEMPERATURE RESISTANCE
- CHROME PLATED FINISH FOR ATTRACTIVE APPEARANCE AND MAXIMUM CORROSION RESISTANCE
- COST EFFECTIVE ALTERNATIVE TO WELDING AND POLISHING
- PROVIDES A STABLE, WELD-TIGHT JOINT
- CONFORMS TO REQUIREMENTS OF NFPA STANDARD NO. 96
- UL TESTED AND LISTED UNDER HOOD & DUCT ACCESSORIES FOR USE IN USA AND CANADA

MODEL NO. F11-004



FAN HINGE KIT

Component Hardware hinge kits are the affordable solution to the fire code requirement for hinging commercial kitchen exhaust fans. Installation is simple and takes less than 30 minutes. They'll save the owner money for years to come by providing optimal accessibility, allowing the technician to clean the fan and ductwork quickly and safely.

- HEAVY DUTY, 10 GAUGE CORROSION RESISTANT STEEL
- FITS MOST COMMERCIAL FAN BASES
- ALLOWS FAN TO BE LIFTED BACK TO A FULL 90° ANGLE
- SAFETY CHAINS SUPPORT FAN WHILE IN OPEN POSITION FOR SAFE ACCESS TO FAN AND DUCT

MODEL NO.	SHIPPING WT.	CASE QTY.
FG74-0506	5 lbs (2.3 kg)	1



FAN ACCESS PANEL

NFPA 96-8.1.5.3.1 requires all upblast fans to be supplied with an access opening of at least 4" in diameter for cleaning and inspection of the fan blades. The FG99-0005 is 5" in diameter, and is easy to install from the outside of the fan. Constructed of high strength HNBR rubber bonded to closed cell foam and zinc plated steel metal components, this fan access panel will hold up to the harshest weather, grease, and cleaning compounds.

MODEL NO.	WEIGHT	CASE QTY.
FG99-0005	1 lb (.45 kg)	1

SINGLE DEFLECTION MULTI-VALVE DAMPERS



- EXTRUDED ANODIZED ALUMINUM TO MATCH STAINLESS STEEL • AERODYNAMIC FIN DESIGN • OTHER SIZES AVAILABLE UPON APPLICATION
- HORIZONTAL DAMPERS AVAILABLE ON SPECIAL APPLICATION • (ON SPECIAL APPLICATION ORDERS ALLOW TWO WEEKS FOR DELIVERY FROM RECEIPT OF ORDER) • FOR OVERALL DIMENSIONS ADD 1-3/4" (44mm) TO LISTED WIDTH AND LENGTH

90 VML SERIES SINGLE DEFLECTION MULTI-VALVE DAMPERS

MODEL NO.	DUCT SIZE (ACTUAL HOLE SIZE)	CASE QTY.
90VML-20X4	20" x 4" (508mm x 102mm)	10
90VML-24X4	24" x 4" (610mm x 102mm)	10
90VML-24X6	24" x 6" (610mm x 152mm)	10
90VML-24X8	24" x 8" (610mm x 203mm)	10
90VML-24X10	24" x 10" (610mm x 254mm)	5
90VML-24X12	24" x 12" (610mm x 305mm)	5
90VML-30X6	30" x 6" (762mm x 152mm)	10
90VML-36X6	36" x 6" (914mm x 152mm)	16

SILICONE SEALANT

- 10.3 oz (305ml)
- NSF LISTED • FDA APPROVED
- AVAILABLE IN CLEAR, BRIGHT ALUMINUM, WHITE, BLACK AND RED (HI-TEMP)
- FITS ALL STANDARD CAULKING GUNS
 - U.L. RECOGNIZED
- MEETS FDA EXTRACTION REQUIREMENT NO. 21 CFR177.2600
- FURNISHED WITH REMOVABLE TIP



MODEL NO.	COLOR	MAX. SERVICE	CASE QTY.
M90-1010	Clear	392°F (200°C)	12
M90-1012	Aluminum	392°F (200°C)	12
M90-1014	White	392°F (200°C)	12
M90-1016	Black	392°F (200°C)	12
M90-1018	Hi Temp Red	500°F (260°C)	12

ALSO AVAILABLE IN 3 oz (85g) TUBES
CLEAR: M90-0310 ALUMINUM: M90-0312 WHITE: M90-0314
 PACKAGED 20 PER PACK
 5 GALLON (19 liter): **MODEL NO. M90-5012**



INSULATION HANGERS

MODEL NO.	HANGER LENGTH	CASE QTY.
Q86-1000	1" (25mm)	1000
Q86-1250	1-1/4" (32mm)	1000
Q86-1500	1-1/2" (38mm)	1000
Q86-1625	1-5/8" (41mm)	1000
Q86-2000	2" (51mm)	1000

- PROVIDED WITH PEEL AND PLACE ADHESIVE BACKING
 - ANNEALED COPPER COATED STEEL NAIL
- ELIMINATES USING CAPACITOR DISCHARGE NAILS
- SUPPLIED WITH GALVANIZED RETAINING PLATE

Insulation Hangers are made of 2" x 2" (51mm x 51mm) Galvanized Plates with a 1/32" (.794mm) white urethane foam backing which has been coated with a high performance, acrylic based adhesive protected by a release coated liner.

NOTE: OTHER LENGTHS AVAILABLE UPON REQUEST



INSULATION WELD PINS

- ANNEALED COPPER COATED STEEL NAIL • CD TYPE
- GALVANIZED STEEL RETAINING PLATE AVAILABLE





MODEL NO.	PIN SIZE	CASE QTY.
Q86-0010	12 ga. x 1" (25mm)	1000
Q86-0015	12 ga. x 1-1/2" (38mm)	1000
RETAINING PLATE		
Q86-0001	1 x 1-1/4" (32mm)	1000



**GREASE REMOVAL SYSTEM
FOR EXHAUST FANS**

- EASY ONE-MAN INSTALLATION – ONLY 5 SCREWS
- HELPS PREVENT GREASE SPILLAGE LEADING TO COSTLY ROOF DAMAGE, WATER CONTAMINATION, AND FIRE/SAFETY HAZARDS
- PREVENTS GREASE BOX OVERFLOW BY ALLOWING CLEAN RAINWATER TO ESCAPE WHILE CONTAINING GREASE
- NO COSTLY FILTER MEDIA • NO ROOF PENETRATIONS
- SIMPLIFIES HOOD CLEANING PROCESS • 304 SS CONSTRUCTION
- 24-1/8" (613mm) L x 15-5/6" 9402mm) W x 7-5/9" (192mm) H
 - NO MOVING PARTS, NO MAINTENANCE
 - MEETS REQUIREMENTS OF NFPA 96-2017
 - 3 YEAR WARRANTY

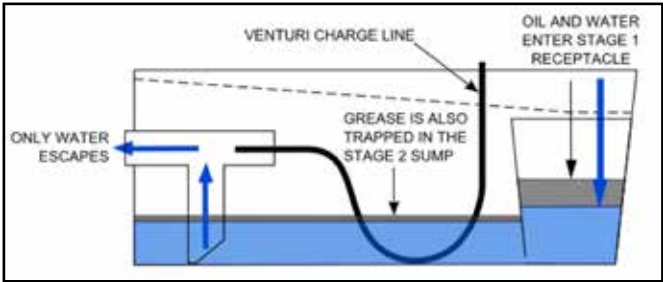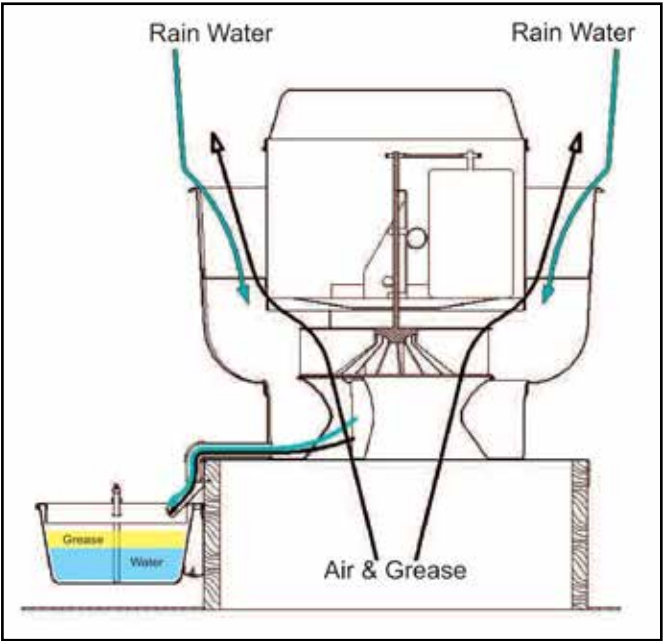


LISTED
MH49237
Rooftop Grease/Oil Collection/
Containment Systems

MODEL NO. EFI-UB

**DIVERTER TROUGH FOR UTILITY
"SQUIREL CAGE" FANS**

MODEL NO.	DESCRIPTION
EFI-SQL	Large
EFI-SQS	Small

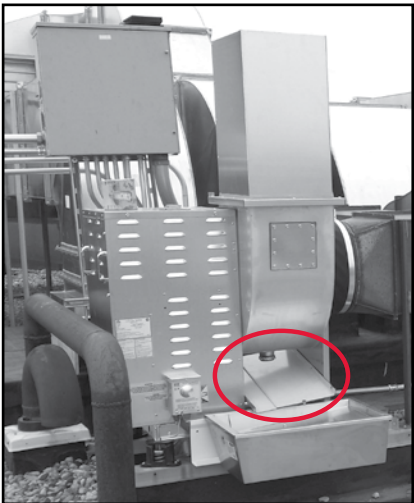

GASKET REPAIR KIT

- EXTEND THE SERVICE LIFE OR REPAIR OF UL FIRE RATED ACCESS DOORS
- GASKET MATERIAL MAXIMUM SERVICE TEMPERATURE IS RATED TO 2,300°F, 1260°C
- SILICONE ADHESIVE IS UL CLASSIFIED AND FACTORY MUTUAL APPROVED
 - UL APPROVED GASKET AND ADHESIVE MUST BE USED TOGETHER TO RETAIN THE UL LISTING ON YOUR COMPONENT HARDWARE® ACCESS PANEL
- KIT INCLUDES ENOUGH MATERIAL TO REPAIR 7-16 ACCESS DOORS, DEPENDING ON DOOR SIZES

REPAIR KIT INCLUDES

- 1 TUBE - SIL300 HIGH TEMPERATURE SILICONE ADHESIVE, 10.3 OZ (305ml) CARTRIDGE WITH REMOVABLE TIP
- 1 ROLL - HIGH TEMPERATURE SILICA CLOTH GASKET, .090 (2.3mm) THICK X 1.5" (38mm) WIDTH X 50' (15m) LENGTH

MODEL NO.	SHIPPING WT.	CASE QTY.
750002	3.5 lbs (1.6 kg)	1

SIL300 SILICONE FIRESTOP SEALANT IS:

	FILL, VOID OR CAVITY MATERIAL CLASSIFIED BY UNDERWRITERS LABORATORIES INC.® FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEMS.	
	SEE UL FIRE RESISTANCE DIRECTORY UNDERWRITERS LABORATORIES® CLASSIFIED WALL PROTECTION MATERIAL. SEE PRODUCT CATEGORY IN UL FIRE RESISTANCE DIRECTORY CLASSIFIED FILL, VOID, OR CAVITY MATERIALS FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEMS. SEE UL DIRECTORY OF PRODUCTS CERTIFIED FOR CANADA AND UL FIRE RESISTANCE DIRECTORY	



MAKE-UP AIR DUCT ACCESS PANEL

UNINSULATED ACCESS PANEL PROVIDES EASY ACCESS INTO MAKE-UP AIR DUCTS. SIMPLE TO INSTALL; SELF-ADHESIVE TEMPLATE PROVIDED.

OPENS AND CLOSSES WITHOUT TOOLS

MODEL NO.	SIZE	CASE QTY.	SHIPPING WT.
760804-D14	4" x 8" (102mm x 203mm)	1	4 lbs (1.81 kg)

HI-TEMP ACCESS DOORS

- HI-TEMP ACCESS DOOR IS SOLID, LEAK RESISTANT AND CONSISTS OF TWO LAYERS OF STAMPED, HOT DIPPED GALVANIZED STEEL AND ONE 16 GAUGE BLACK IRON BACKING PLATE
- HI-TEMPERATURE CERAMIC FIBER GASKET - RATED 2300°F (1260°C) MAX-MEETS NFPA 96 STANDARDS IS PERMANENTLY BONDED TO THE OUTSIDE PANEL OF THE ACCESS DOOR
- ZINC PLATED CONICAL SPRINGS ARE INSTALLED, BETWEEN THE INNER AND OUTER PLATES, TO FACILITATE OPENING
- ZINC COATED WING NUTS ARE EASILY TURNED BY HAND • NO MEASURING (SELF-ADHESIVE TEMPLATE PROVIDED)
- 6" BREAK-AWAY STUDS PERMIT INSTALLATIONS WITH FIRE WRAP INSULATION. STUDS MAY BE BROKEN AT 2" (102mm) FOR STANDARD INSTALLATIONS.




MODEL NO.	SIZE	CASE QTY.	SHIPPING WT.
ACC-10X6	10" x 6" (254mm x 152mm)	6	4 lbs (1.8 kg)
ACC-12X8	12" x 8" (305mm x 203mm)	6	5 lbs (2.3 kg)
ACC-18X14	18" x 14" (457mm x 356mm)	6	11 lbs (5 kg)

Flat Access Doors – UL Fire Rated



- EASY TO CLEAN AND EASY TO INSTALL
- GASKET RATED TO 2300°F (1260°C) FOR FIRE TIGHT SEAL
- GASKET IS HIGH-TEMP BONDED TO FRONT PANEL
- AVAILABLE WITH EXTENDED STUDS TO ACCOMMODATE FIRE WRAP FOR FLAT DUCT APPLICATIONS
- HEAVY-DUTY 16 GAUGE STEEL CONSTRUCTION
- STAINLESS STEEL MODEL AVAILABLE
- NO MINIMUM ORDER REQUIREMENTS
- POSITIVE BOLT PATTERN ENSURES FIRE-SAFE CLOSURE
- BACK FRAME REINFORCES DUCT CUT-OUT
- STANDARD AND CUSTOM SIZES AVAILABLE
- NFPA 96 COMPLIANT

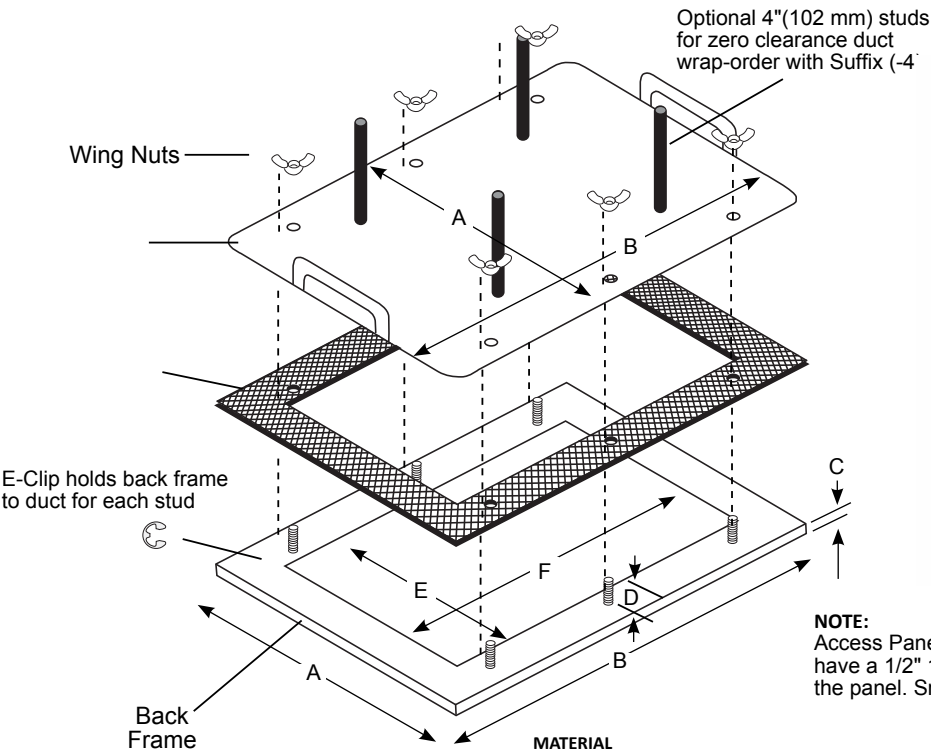

NOTE:
Access Panels over 7" x 7" (178mm x 178mm) have a 1/2" (13mm) turndown to add rigidity to the panel. Smaller sizes do not have a turndown.


MATERIAL
BACK PLATE: Cold Rolled Steel, Thickness – 0.057" (1.5mm)
FRONT PLATE: Galvanized Steel, Thickness – 0.060" (1.5mm)



MODEL NO.	PANEL OUTSIDE DIMENSION		PANEL HEIGHT	STUD HEIGHT	HOLE SIZE		MTG STUDS
	A	B			E	F	
750710	7" (178mm)	10" (254mm)	FLAT	1" (25mm)	5.5" (140mm)	8.5" (216mm)	6
750715	7" (178mm)	15" (381mm)	FLAT	1" (25mm)	5.5" (140mm)	13.5" (343mm)	6
750723	7" (178mm)	23" (584mm)	FLAT	1" (25mm)	5.5" (140mm)	21.5" (546mm)	10
750606	8" (203mm)	8" (203mm)	FLAT	1" (25mm)	6" (152mm)	6" (152mm)	4
750707	10" (254mm)	10" (254mm)	.5" (13mm)	1" (25mm)	7" (178mm)	7" (178mm)	4
750712	10" (254mm)	15" (381mm)	.5" (13mm)	1" (25mm)	7" (178mm)	12" (305mm)	6
750720	10" (254mm)	23" (584mm)	.5" (13mm)	1" (25mm)	7" (178mm)	20" (508mm)	10
751212	15" (381mm)	15" (381mm)	.5" (13mm)	1" (25mm)	12" (305mm)	12" (305mm)	8
751220	15" (381mm)	23" (584mm)	.5" (13mm)	1" (25mm)	12" (305mm)	20" (508mm)	14
751620	19" (483mm)	23" (584mm)	.5" (13mm)	1" (25mm)	16" (406mm)	20" (508mm)	16
752020	23" (584mm)	23" (584mm)	.5" (13mm)	1" (25mm)	20" (508mm)	20" (508mm)	16

For custom sizes use order form ORD-FG-CFAD

- EASY TO CLEAN AND EASY TO INSTALL
- GASKET RATED TO 2300°F (1260°C) FOR FIRE TIGHT SEAL
- GASKET IS HIGH-TEMP BONDED TO FRONT PANEL
- AVAILABLE WITH EXTENDED STUDS TO ACCOMMODATE FIRE WRAP FOR CURVED DUCT APPLICATIONS
- HEAVY-DUTY 16 GAUGE STEEL CONSTRUCTION
- STAINLESS STEEL MODEL AVAILABLE
- NO MINIMUM ORDER REQUIREMENTS
- POSITIVE BOLT PATTERN ENSURES FIRE-SAFE CLOSURE
- BACK FRAME REINFORCES DUCT CUT-OUT
- STANDARD AND CUSTOM SIZES AVAILABLE
- NFPA 96 COMPLIANT

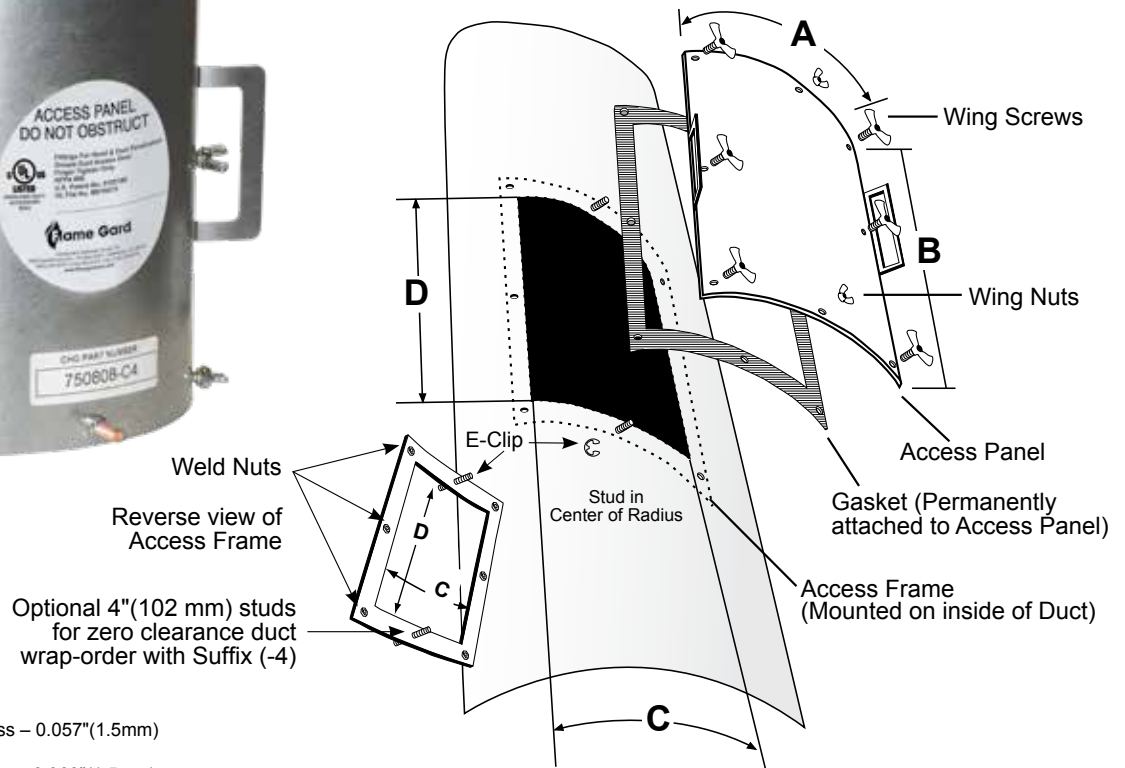

Cold Rolled Steel, Thickness – 0.057" (1.5mm)

Galvanized Steel, Thickness – 0.060" (1.5mm)

NOTE:

The cut out dimension C should be 70% or less than the Duct Diameter for proper fit.




File No. MH19744

MODEL NO.	PANEL OUTSIDE DIMENSIONS		HOLE SIZE	
	A	B	C	D
750505-C	6.75" (167mm)	6.75" (171mm)	5.06" (129mm)	5.25" (133mm)
750511-C	6.75" (165mm)	12.75" (324mm)	5.00" (127mm)	11.25" (286mm)
750517-C	6.75" (165mm)	18.75" (476mm)	5.00" (127mm)	17.25" (438mm)
750808-C	9.75" (241mm)	9.75" (248mm)	8.00" (203mm)	8.25" (210mm)
750811-C	9.75" (241mm)	12.75" (324mm)	8.00" (203mm)	11.25" (286mm)
750817-C	9.75" (241mm)	18.75" (476mm)	8.00" (203mm)	17.25" (438mm)
750823-C	9.75" (241mm)	24.75" (629mm)	8.00" (203mm)	23.25" (591mm)
751117-C	12.75" (318mm)	18.75" (476mm)	11.00" (279mm)	17.25" (438mm)
751123-C	12.75" (318mm)	24.75" (629mm)	11.00" (279mm)	23.25" (591mm)
751717-C	18.75" (470mm)	18.75" (476mm)	17.00" (432mm)	17.25" (438mm)
751723-C	18.75" (470mm)	24.75" (629mm)	17.00" (432mm)	23.25" (591mm)

For custom sizes use order form ORD-FG-CCAD

Order Form - For Custom Flat Access Door Panels

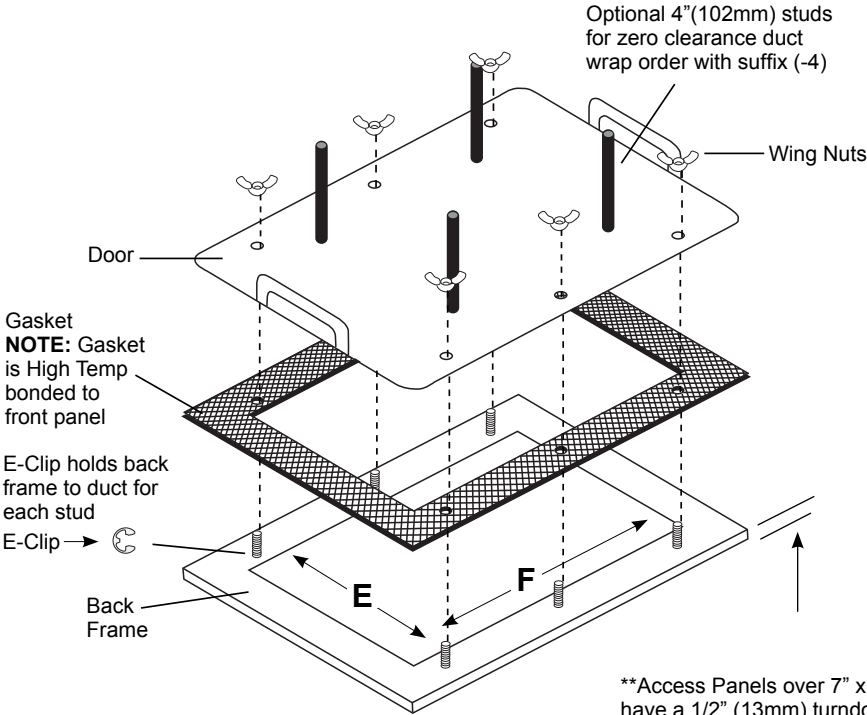

**Access Panels over 7" x 7" (178mm x 178mm) have a 1/2" (13mm) turndown to add rigidity to the panel. Smaller sizes do not have a turndown.

QUANTITY REQUIRED		DIMENSIONS	SIZE	INCHES or MM
		DIMENSION "E"		
		DIMENSION "F"		


PANEL MATERIAL	Check One	PANEL THICKNESS	Check One	MOUNTING HARDWARE MATERIAL	Check One
GALVANIZED STEEL		.050" (1.3mm) S/S Models only		ZINC PLATED STEEL	
STAINLESS STEEL 304		.060"(1.5mm)		STAINLESS STEEL 304	
STAINLESS STEEL 316L		.125"(3.2mm)			

Additional Notes

Date:	P.O. #	Account No:
Company Name:	Contact Name:	
Address:	City & State:	Zip:
Phone No:	E-mail:	

ORD-FG-CFAD

Order Form - For Curved Access Door Panels

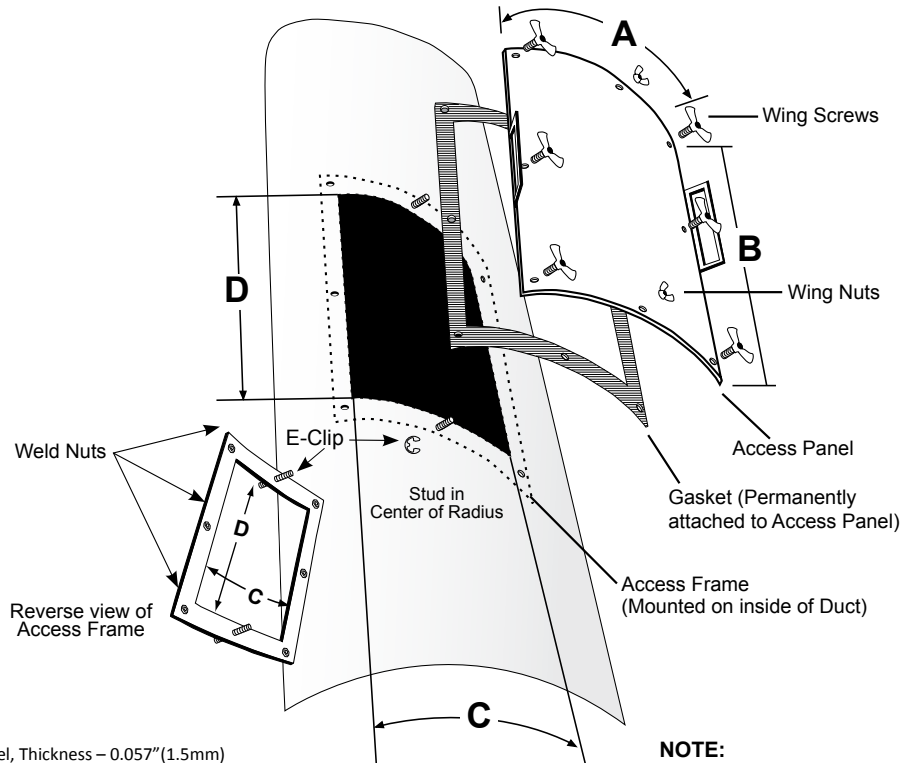

MATERIAL

BACK PLATE: Cold Rolled Steel, Thickness – 0.057" (1.5mm)
FRONT PLATE: Galvanized Steel, Thickness – 0.060" (1.5mm)

NOTE:

The cut out dimension C should be 70% or less than the Duct Diameter for proper fit.

MODEL NO:

DUCT DIAMETER:

QTY:

Additional Notes:


Note: All access panels are custom manufactured per order and are not returnable for credit.

ORDER BY MODEL NO.	PANEL OUTSIDE DIMENSIONS INCHES (MM)		HOLE SIZE INCHES (MM)	
	A	B	C*	D
750505-C	6.75" (171mm)	6.75" (171mm)	5.06" (129mm)	5.25" (133mm)
750511-C	6.75" (171mm)	12.75" (324mm)	5.00" (127mm)	11.25" (286mm)
750517-C	6.75" (171mm)	18.75" (476mm)	5.00" (127mm)	17.25" (438mm)
750808-C	9.75" (248mm)	9.75" (248mm)	8.00" (203mm)	8.25" (210mm)
750811-C	9.75" (248mm)	12.75" (324mm)	8.00" (203mm)	11.25" (286mm)
750817-C	9.75" (248mm)	18.75" (476mm)	8.00" (203mm)	17.25" (438mm)
750823-C	9.75" (248mm)	24.75" (629mm)	8.00" (203mm)	23.25" (591mm)
751117-C	12.75" (324mm)	18.75" (476mm)	11.00" (279mm)	17.25" (438mm)
751123-C	12.75" (324mm)	24.75" (629mm)	11.00" (279mm)	23.25" (591mm)
751717-C	18.75" (476mm)	18.75" (476mm)	17.00" (432mm)	17.25" (438mm)
751723-C	18.75" (476mm)	24.75" (629mm)	17.00" (432mm)	23.25" (591mm)

Date:	P.O. #	Account No:
Company Name:	Contact Name:	
Address:	City & State:	
Phone No:	E-mail:	Zip:

ORD-FG-CAD

Order Form - For Custom Curved Access Door Panels

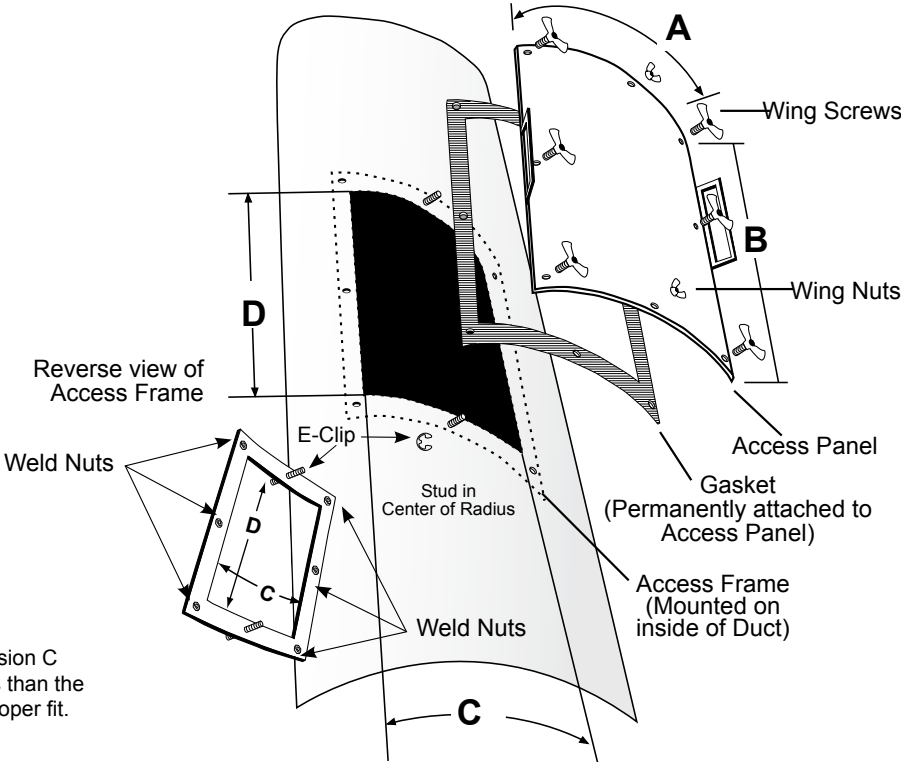

#	DIMENSION	INCHES or MM
1	DUCT DIAMETER 'A'	
2	70% OF DUCT DIAMETER ('A' x .7)	
3	CUT-OUT DIMENSION 'C'	
4	CUT-OUT DIMENSION 'D'	
NOTE: DIMENSION #3 MUST BE EQUAL TO OR LESS THAN DIMENSION #2.		


QUANTITY REQUIRED	
----------------------	--

CHECK ONE	PANEL MATERIAL	PANEL THICKNESS	MOUNTING HARDWARE
	GALVANIZED STEEL	16 ga. .060" (1.5mm)	ZINC PLATED STEEL
	STAINLESS STEEL 304	16 ga. .060" (1.5mm)	STAINLESS STEEL 304
	STAINLESS STEEL 304	18 ga. .050" (1.3mm)	STAINLESS STEEL 304

Additional Notes

Date:	P.O. #	Account No:
Company Name:	Contact Name:	
Address:	City & State:	Zip:
Phone No:	E-mail:	

ORD-FG-CCAD

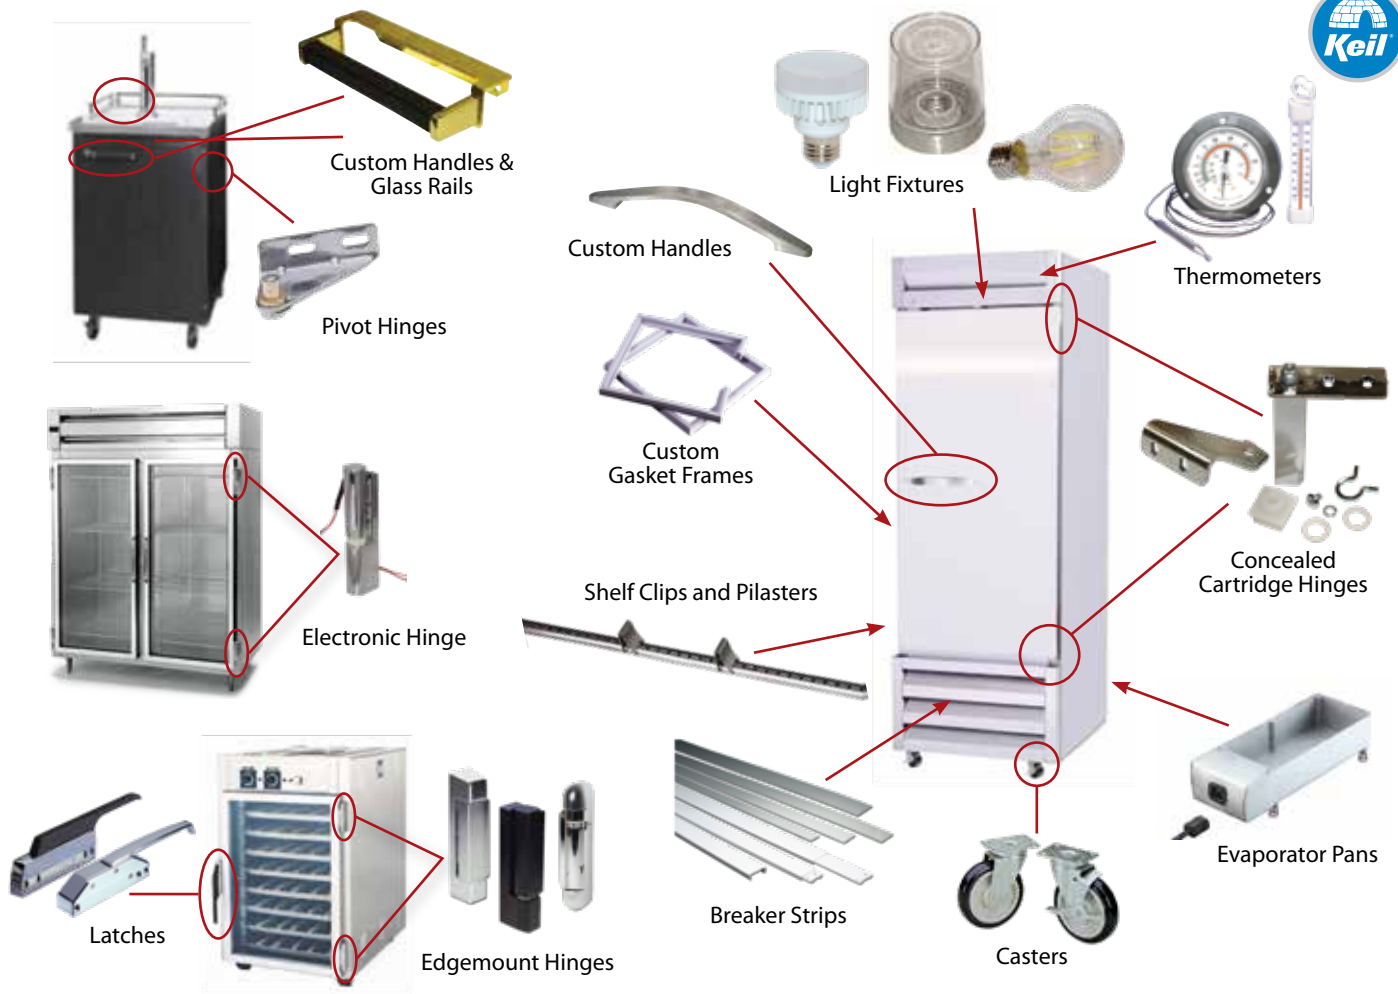

HINGE SELECTOR GUIDE & CHART	B36	HINGE REPLACEMENT PARTS	B50
HANDLES	B37	CONCEALED CARTRIDGE HINGES	B51
MECHANICAL LATCHES	B38	CONCEALED PIVOT BRACKETS	B52-B54
MECHANICAL EDMOUNT LATCH	B39	PADLOCK HASP ASSEMBLY	B55
MAGNETIC/MECHANICAL LATCHES	B40	CONDENSATE EVAPORATORS	B56-B57
MAGNETIC EDMOUNT LATCH	B41	THERMOMETERS	B58
CERAMIC MAGNETIC COMPACT LATCH	B42	PILASTER & SHELF SUPPORTS	B59
SURFACE MOUNT & CABINET LATCHES	B43	MASTIC, GROMMETS & CONDUIT SLEEVE	B60
NON-RISE EDMOUNT HINGES	B44-B46	GASKET FRAMES	B61-B62
STANDARD-DUTY NON-RISE EDMOUNT HINGES	B47	GASKETS & BREAKER STRIPS	B63
LIFT-OFF EDMOUNT HINGES	B48	ORDER FORM - CUSTOM MADE GASKET FRAMES	B64
ELECTRONIC HINGES	B49	ORDER FORM - CUSTOM WIRE SHELVES	B65

For Lighting Components, please see Lighting & Electrical on pages D95- D111

Hinge Selector Guide & Chart

COMPONENT HARDWARE® HINGE SELECTOR GUIDE

This hinge selector is designed to assist you in choosing the correct Component Hardware hinges for commercial reach-in and walk-in refrigeration, foodservice equipment, transportation, industrial and other applications. The Load Chart below shows our recommended allowable load per pair of hinges for each hinge group.

The data supplied in this chart applies for normal operating conditions under static loading by door weight only. Other factors, such as positive or negative pressure, high gasket compression, lateral stress, corrosive or abrasive environments, or structural movement are not taken into account. It is the ultimate responsibility of the user to determine the suitability and capacity required for their specific application.

- B
1. Locate the weight of your door in the far left column, headed DOOR WEIGHT.
 2. Find the width of your door along the bottom of the chart.
 3. Where the weight line and width column intersect, find the recommended hinge group code (A, B, etc.)
 4. Select your hinges from the Component Hardware® hinge groups below.

NOTE: If exact dimensions and weight for your door is not shown, use the next higher width and weight.


Hinge Groups A-C Shown in REACH-IN, Section E
Hinge Groups D-J Shown in WALK-IN, Section EE


COMPONENT HARDWARE® HINGE GROUPS


GROUP	HINGE MODEL NUMBERS
A	R20-1010, R20-1020, R45-1010, R40-1010, R42-2840, R42-2841, R42-2842, R42-2843, R42-2842-BR
B	R42-2000, R42-2855, R56 SERIES
C	R50-2850, R50-2850-SPO, R50-2850-BLK, R50-2850-SS, R50-2850-NL, R50-2850-BA, R51-2000, R51-2000-RS, R51-2000-CS
D	W58, W59, W60, W61 SERIES, W99-6015-SS, W99-4100-SSRH, W99-4100-SSLH, W55-1000, W56-1000
E	N/A
F	W99-2001, W99-2001-GE, W99-2063 , W99-2063-G6, W77-1625
G	N/A
H	N/A
J	N/A

HOW TO DETERMINE OFFSET FOR HINGES AND LATCHES


With door closed, measure the distance from the jamb to the door face.

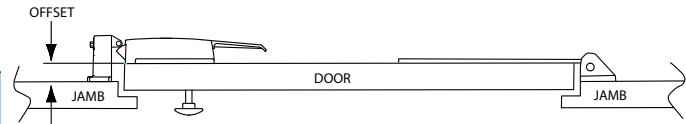

DOOR WEIGHTS		LOAD CHART																					
kg.	lb.																						
226.8	500	D	D	E	F	F	F	G	G	G	G	H	H	H	H	H	H	H	J	J	J	J	
217.7	480	D	D	E	F	F	F	G	G	G	G	H	H	H	H	H	H	H	J	J	J	J	
208.6	460	D	D	E	E	F	F	F	G	G	G	G	H	H	H	H	H	H	H	J	J	J	
199.5	440	D	D	D	E	F	F	F	G	G	G	G	G	H	H	H	H	H	H	H	J	J	
190.5	420	D	D	D	E	F	F	F	F	G	G	G	G	H	H	H	H	H	H	H	H	J	
181.4	400	D	D	D	E	E	F	F	F	G	G	G	G	G	H	H	H	H	H	H	H	H	
172.4	380	D	D	D	D	E	F	F	F	F	G	G	G	G	G	H	H	H	H	H	H	H	
163.3	360	D	D	D	D	E	E	F	F	F	G	G	G	G	G	G	H	H	H	H	H	H	
154.2	340	D	D	D	D	E	E	F	F	F	F	G	G	G	G	G	G	H	H	H	H	H	
145.2	320	C	D	D	D	D	E	E	F	F	F	F	G	G	G	G	G	G	H	H	H	H	
136.1	300	C	D	D	D	D	D	E	E	F	F	F	F	F	G	G	G	G	G	G	G	H	
127.0	280	C	D	D	D	D	D	E	E	F	F	F	F	F	G	G	G	G	G	G	G	H	
117.9	260	C	C	D	D	D	D	D	E	E	F	F	F	F	F	G	G	G	G	G	G	G	
108.9	240	C	C	D	D	D	D	D	D	E	E	F	F	F	F	F	F	G	G	G	G	G	
99.8	220	C	C	C	D	D	D	D	D	D	E	E	E	F	F	F	F	F	F	G	G	G	
90.7	200	B	C	C	D	D	D	D	D	D	D	E	E	E	F	F	F	F	F	F	F	G	
81.7	180	B	C	C	C	D	D	D	D	D	D	D	E	E	E	F	F	F	F	F	F	F	
72.6	160	B	B	C	C	C	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F	F	
63.5	140	B	B	C	C	C	C	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	
54.4	120	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	E	E	
45.4	100	A	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	
36.3	80	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	
27.2	60	A	A	A	A	B	B	B	B	B	B	C	C	C	C	C	C	C	C	C	D	D	
18.1	40	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	C	C	C	C	
9.0	20	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	
DOOR WIDTH	in.	12	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	
	cm.	30.5	38.1	45.7	53.3	61.0	68.6	76.2	83.8	91.4	99.1	106.7	114.3	121.9	129.5	137.2	144.8	152.4	160.0	167.6	175.3	182.9	

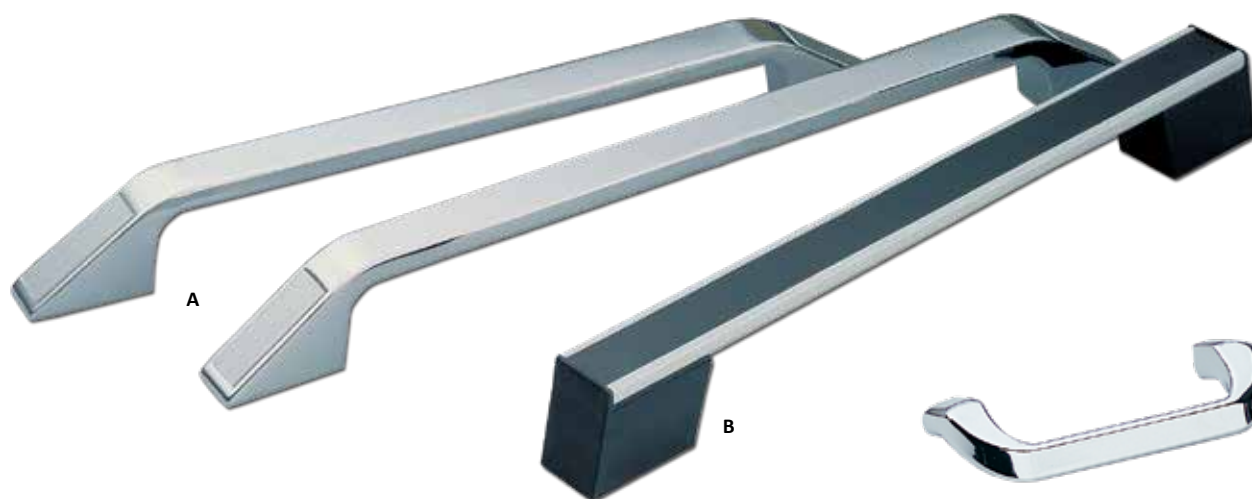

HANDLES

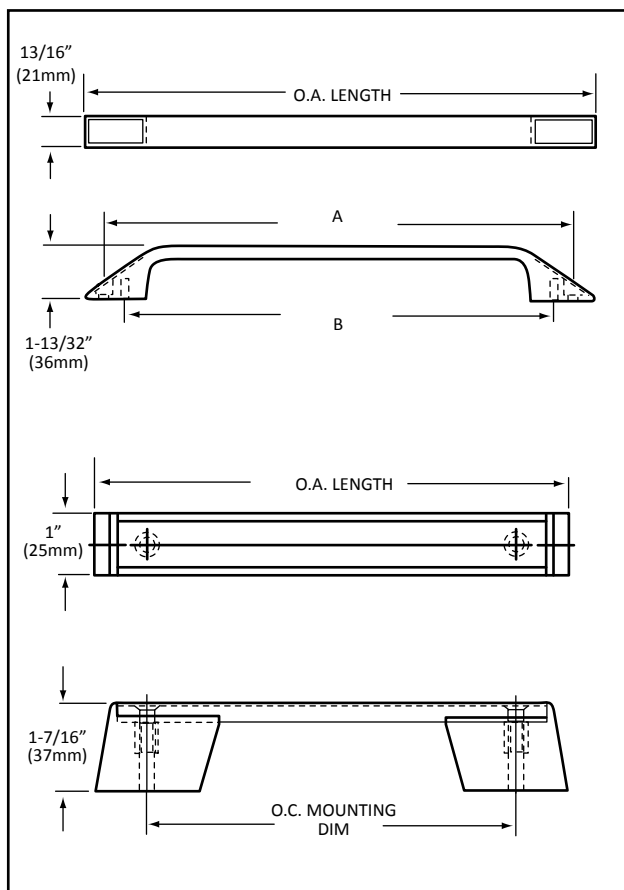

REF. A

SCULPTURED HANDLES FEATURING

- SOLID METAL CASTING • POLISHED CHROME FINISH
- FRONT OR REAR FASTENING • TWO LENGTHS AVAILABLE

MODEL NO.	O.A. LENGTH	"A" DIM.	"B" DIM.
P48-1010	14-5/8" (371mm)	13-7/16" (340mm)	12-7/16" (316mm)
P48-1012*	12-13/16" (325mm)	11-5/8" (295mm)	10-5/8" (270mm)

NOTES: "A" DIMENSION REPRESENTS HOLE CENTERS FOR FRONT MOUNTING #10 SCREWS. "B" DIMENSION REPRESENTS THREADED HOLE CENTERS TO RECEIVE 1/4-20 SCREWS FOR REAR MOUNTING. DECORATIVE TRIM INSERTS ARE SUPPLIED TO CONCEAL FRONT MOUNTING SCREWS. EXTRA TRIM INSERTS ARE AVAILABLE AND MAY BE ORDERED AS **MODEL NO. P48-X002**.

REF. B

DECORATIVE HANDLES FEATURING

- DUAL MOUNTING - FRONT OR REAR • TWO STANDARD LENGTHS AVAILABLE
- HEAT RESISTANT • HEAVY DUTY CONSTRUCTION

MODEL NO.	O.A. LENGTH	O.C. MOUNTING DIM.
P49-1500-6	7-11/16" (195mm)	6" (152mm)
P49-1500	12-1/4" (311mm)	10-5/8" (270mm)

NOTES: PRE-ASSEMBLED HANDLES WILL ACCEPT SCREWS FOR FRONT MOUNTING. INTERNAL BRASS BUSHINGS ACCEPT STANDARD 1/4-20 MACHINE SCREWS FOR REAR FASTENING. A PRESSURE SENSITIVE BLACK VINYL INSERT CONCEALS SCREW HOLES. OTHER LENGTHS AVAILABLE UPON APPLICATION ON QUANTITY ORDERS.


REF. C

OFFSET HANDLE

- IDEAL FOR ICE BIN DOORS
- POLISHED CHROME FINISH

MODEL NO. P40-1010

MATERIAL: CHROME PLATED DIE CAST METAL

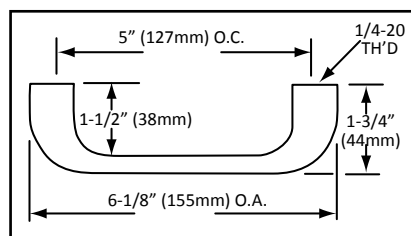



B



POSITIVE PRESSURE SEAL
CROSS SECTION DETAIL


**MECHANICAL
EDGEMOUNT LATCHES
WITH POSITIVE PRESSURE SEAL**

- MOUNTING HOLE LOCATIONS ARE INTERCHANGEABLE WITH COMPETITORS' LATCHES
- UNIQUE KEEPER PREVENTS DOOR FROM BEING OVERRIDDEN
 - SERRATED STRIKER PLATE PERMITS QUICK ADJUSTMENT TO COMPENSATE FOR DOOR SAG
 - POLISHED CHROME PLATED FINISH
- AVAILABLE IN STRAIGHT AND OFFSET MODELS
 - CYLINDER AND NON-CYLINDER MODELS
 - HEAVY-DUTY RUGGED CONSTRUCTION
 - ADJUSTABLE FOR RIGHT OR LEFT HAND USE

EDGEMOUNT LATCHES - R35 SERIES

MODEL NO.	DESCRIPTION
R35-1105	Straight Handle No Cylinder Lock
R35-1105-C	Straight Handle With Cylinder Lock
R35-1105-X	Offset Handle No Cylinder Lock
R35-1105-XC	Offset Handle With Cylinder Lock

KEYS SHOWN ARE AVAILABLE SEPARATELY
USE **MODEL NO. P30-0802**
STRIKE ONLY - **MODEL NO. R35-Y001**
CYLINDER LOCK - **MODEL NO. R35-Y005**

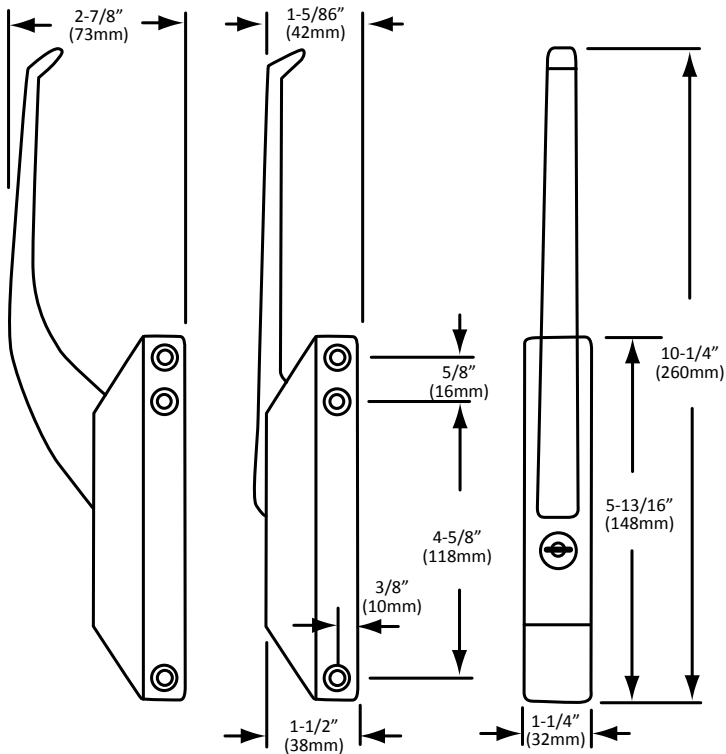


SPECIFICATIONS

CASE, HANDLE & STRIKE: HIGH PRESSURE DIE CAST ZINC
STRIKE PLATE: PLATED STEEL
FINISH: POLISHED CHROME
DRILLED AND COUNTERSUNK FOR NO. 10 SCREWS



B

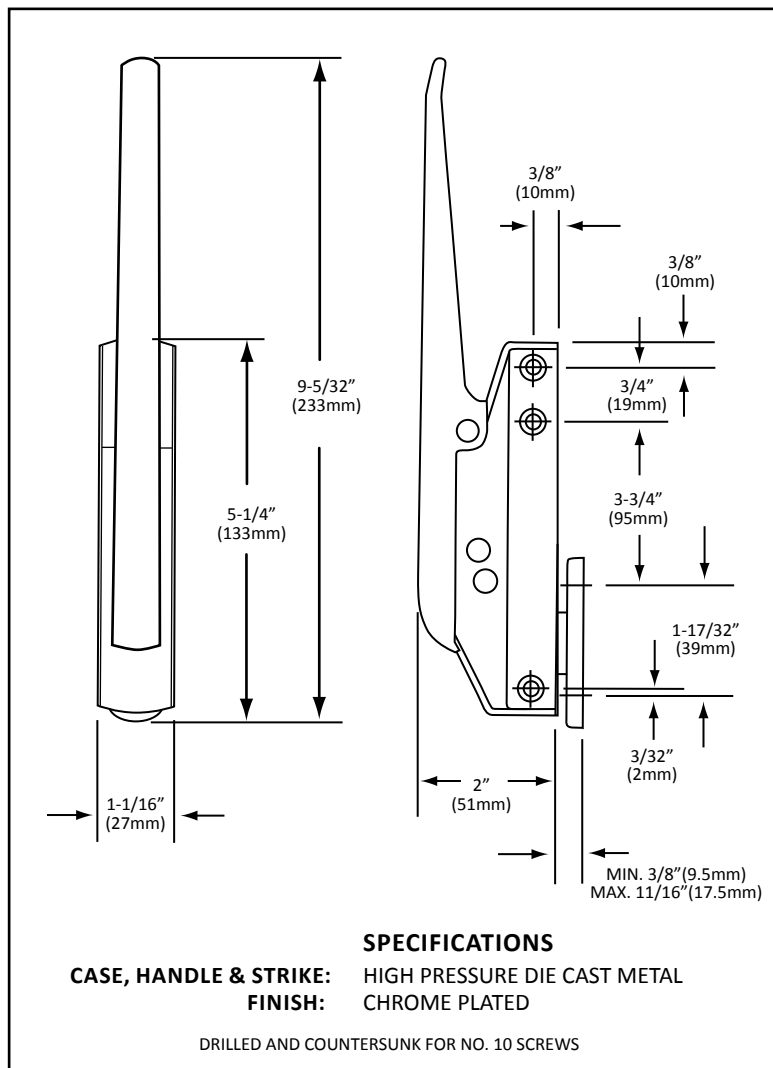



B



MAGNETIC / MECHANICAL EDGEMOUNT LATCHES WITH FLOATING MAGNET


- UNIQUE DUAL DESIGN OFFERS BOTH MECHANICAL LATCHING AND MAGNETIC FORCE TO PROVIDE POSITIVE SEAL AND ELIMINATE DOOR BOUNCE BACK
- UNIQUE FOUR POSITION SOLID ONE PIECE STRIKE BRACKET AND FULL FLOATING MAGNETIC DESIGN INSURES POSITIVE MAGNETIC ATTRACTION AT EVERY ADJUSTMENT
 - HEAVY-DUTY RUGGED CONSTRUCTION
 - REVERSIBLE FOR RIGHT OR LEFT HAND USE
 - CYLINDER AND NON-CYLINDER MODELS
 - POLISHED CHROME PLATED FINISHES
- MOUNTING HOLE LOCATIONS ARE INTERCHANGEABLE WITH COMPETITORS' LATCHES

EDGEMOUNT LATCHES - R24 SERIES

MODEL NO.	DESCRIPTION
R24-9175	Straight Handle No Cylinder Lock
R24-9175-C	Straight Handle With Cylinder Lock
R24-9175-X	Offset Handle No Cylinder Lock
R24-9175-XC	Offset Handle With Cylinder Lock

KEYS SHOWN ARE AVAILABLE SEPARATELY
USE **MODEL NO. P30-0802**

STRIKE ONLY - **MODEL NO. R24-Y001**

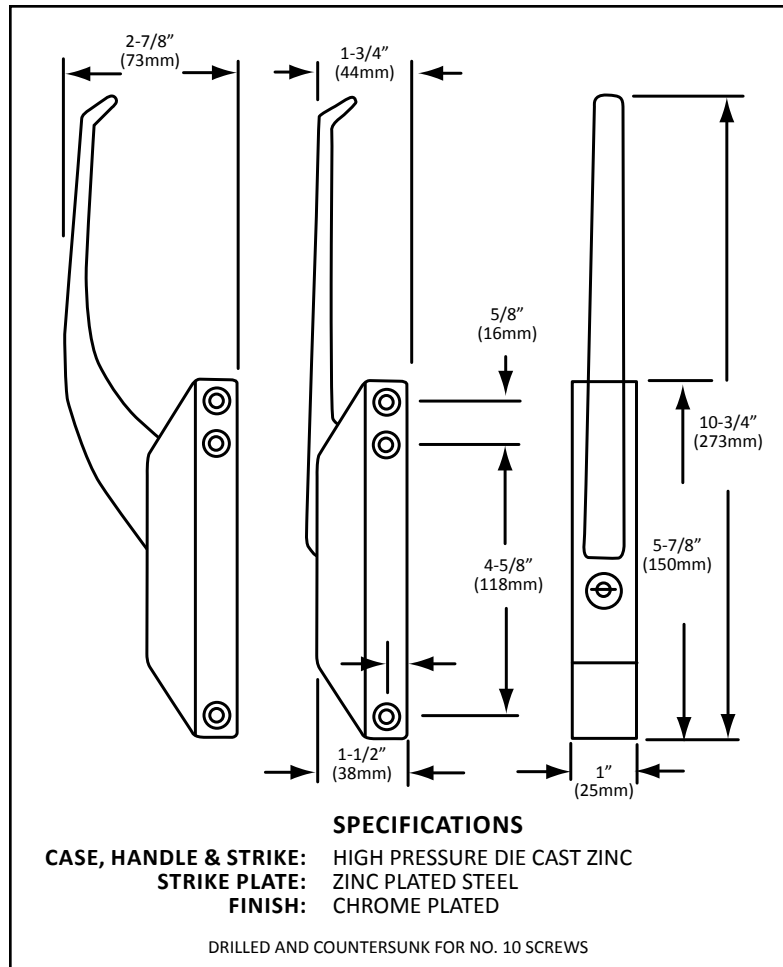

*REPLACES STANDARD-KEIL PART #2824
WITH COMPONENT HARDWARE QUALITY HARDWARE



HEAVY- DUTY MAGNETIC EDGEMOUNT LATCHES WITH BREAKER ACTION

- HEAVY-DUTY MAGNETIC ACTION PROVIDES POSITIVE AND EFFECTIVE SEAL AND ELIMINATES DOOR BOUNCE BACK
- UNIQUE BREAKER ACTION* ELIMINATES POWERFUL MAGNETIC SEAL WHILE ALLOWING EASY OPENING
- SERRATED STRIKER PLATE PERMITS QUICK ADJUSTMENT TO COMPENSATE FOR DOOR SAG
 - REVERSIBLE FOR RIGHT OR LEFT HAND USE
 - CYLINDER AND NON-CYLINDER MODELS
 - CHROME PLATED FINISH
 - EXTRA HEAVY-DUTY RUGGED CONSTRUCTION
- MOUNTING HOLE LOCATIONS ARE INTERCHANGEABLE WITH COMPETITORS' LATCHES


EDGEMOUNT LATCHES - R25 SERIES

REF.	MODEL	DESCRIPTION
A	R25-1700-NC	Straight Handle No Cylinder Lock
B	R25-1700-C	Straight Handle With Cylinder Lock
C	R25-1700-XNC	Offset Handle No Cylinder Lock
	R25-1700-XC	Offset Handle With Cylinder Lock (not shown)

KEYS SHOWN ARE AVAILABLE SEPARATELY
USE **MODEL NO. P30-0802**

STRIKE ONLY - **MODEL NO. R25-X002**

CYLINDER LOCK - **MODEL NO. R25-Y001**

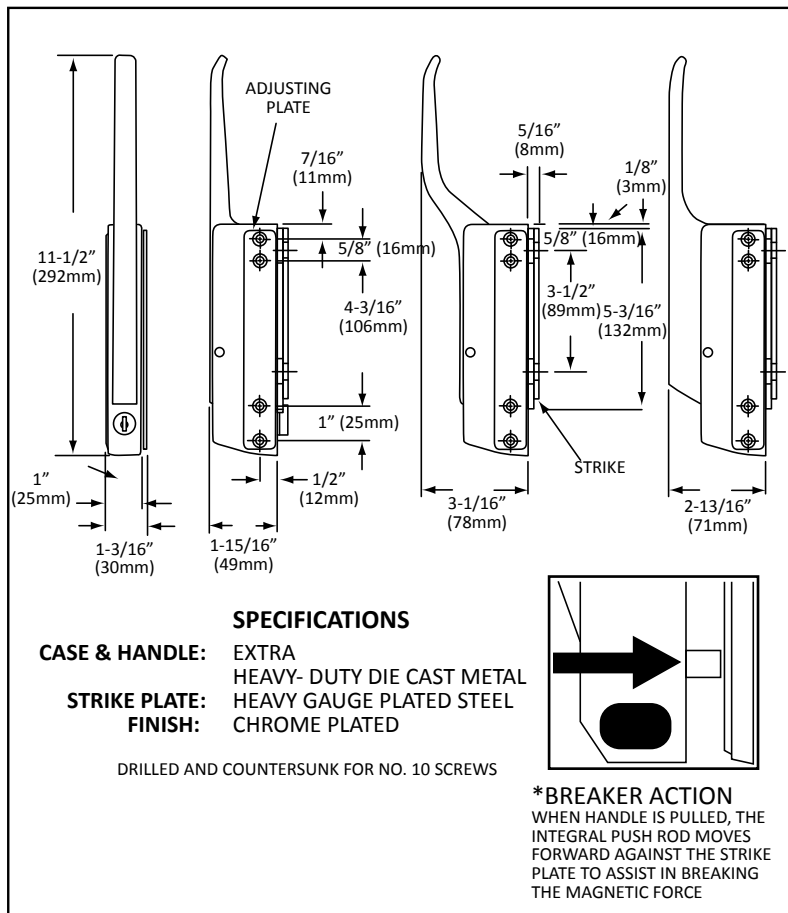

Ceramic Magnetic Compact Latch



B



CERAMIC • MAGNETIC • COMPACT EDGEMOUNT LATCHES WITH BREAKER ACTION

SPECIFICALLY FOR HEATED CABINETS, OVENS AND REFRIGERATORS


- COMPACT DESIGN FOR SPECIAL APPLICATIONS
 - HEAVY-DUTY INSULATED OFFSET HANDLE
- BREAKER ACTION* FOR EASY DOOR OPENING
- POWERFUL HEAT RESISTANT CERAMIC MAGNET
- STAINLESS STEEL MECHANICAL PARTS AND PLATES
- SNAP-IN HOLE PLUGS FOR CONCEALED MOUNTING
- CONTEMPORARY STYLE - BLACK AND CHROME
 - REVERSIBLE APPLICATION

MODEL NO. R27-1010-X

**EACH R27-1010-X EDGEMOUNT LATCH IS
SUPPLIED WITH STRIKE
ASSEMBLIES for BOTH HEATED AND
REFRIGERATED APPLICATIONS**


- STAINLESS STEEL STRIKE PLATE
 - STAINLESS STEEL SPACER
- DIE CAST ZINC STRIKE HOUSING*
 - SILICONE GASKET

* FOR REFRIGERATED APPLICATION ONLY

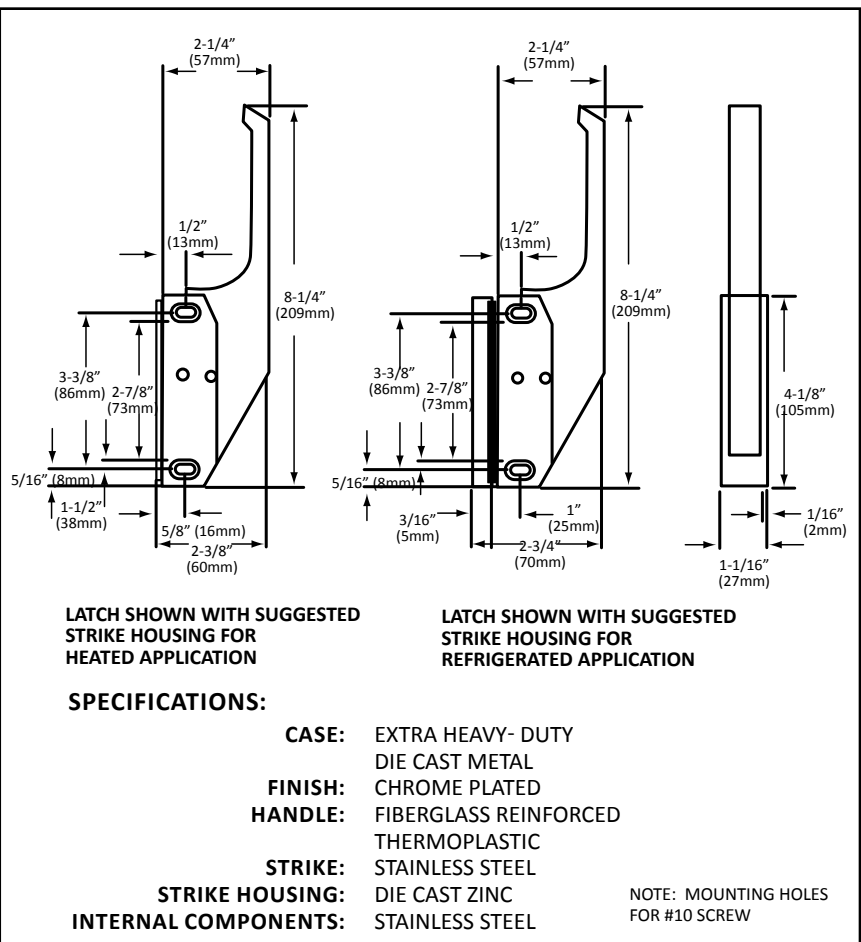


*BREAKER ACTION

WHEN HANDLE IS PULLED, THE INTEGRAL PUSH ROD MOVES FORWARD AGAINST THE STRIKE PLATE TO ASSIST IN BREAKING THE MAGNETIC FORCE.






SURFACE MOUNT and CABINET LATCHES

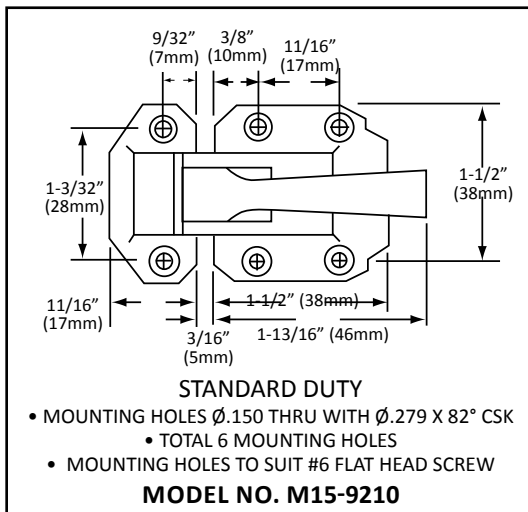

REF. A

CABINET LATCHES

- PROVIDED WITH FLUSH, $1/8"$ (3mm) AND $3/8"$ (10mm) KEEPERS
- CHROME PLATED DIE CAST ZAMAK

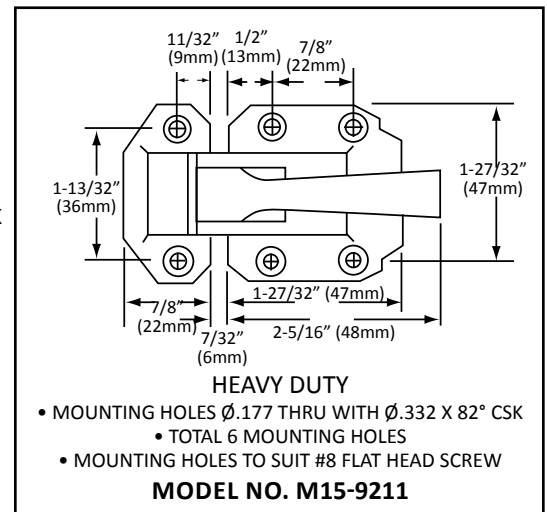

REF. B

SURFACE MOUNT LATCHES


- POSITIVE SNAP-ACTION LATCH IS IDEAL FOR MOBILE CARTS AND REFRIGERATED CABINETS
- CHROME PLATED SNAP-ACTION LATCH PROVIDED WITH SOLID BRASS TRIGGER MECHANISM AND POWERFUL SPRING
- ADJUSTABLE FLUSH STRIKE OR ADJUSTABLE VARIABLE OFFSET MODELS TO CHOOSE FROM
- CHROME PLATED, HEAVY-DUTY PRESSURE DIE CAST HANDLES AND BODY WITHSTAND SEVERE COMMERCIAL USE
- REVERSIBLE FOR RIGHT OR LEFT HAND USE, DESIGNED TO ACCEPT SECURITY PADLOCKS

R30 SERIES SURFACE MOUNT LATCHES


MODEL NO.	OFFSET
R30-9140-FL	0-3/8" (0-9.5mm)
R30-9140-5/8	5/8" - 1-1/4" (16mm-32mm)

- MOUNTING HOLES $\varnothing.230$ THRU WITH $\varnothing.352 \times 82^\circ$ CSK
- TOTAL 7 MOUNTING HOLES
- MOUNTING HOLES TO SUIT #10 FLAT HEAD SCREW

R30-9140-5/8

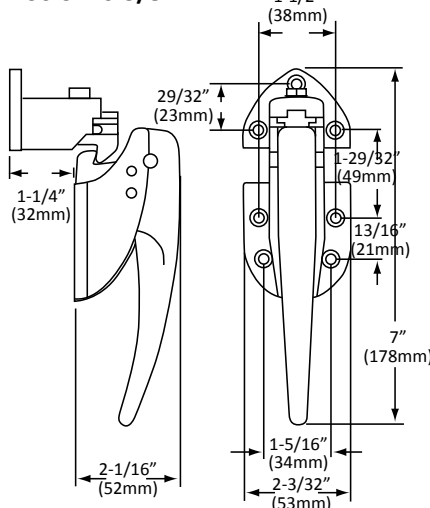

R30-9140-FL

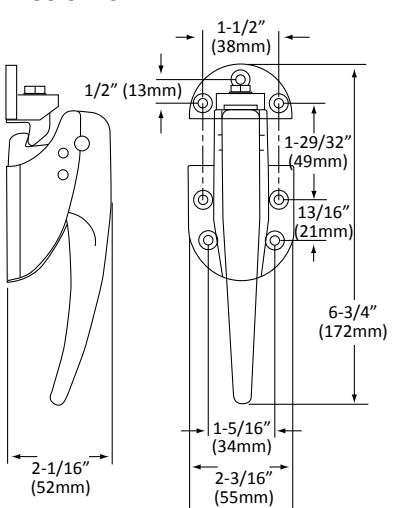

SPECIFICATIONS:

MATERIAL: DIE CAST ZAMAK BODY
WEIGHT: APPROXIMATELY 14 lbs (6.4 kg) PER CARTON
PACKAGING: 10 PER CARTON

DRILLED AND COUNTERSUNK FOR # 10 (5mm) SCREWS

*REPLACES STANDARD-KEIL #9140 OR #2818 SERIES WITH COMPONENT HARDWARE QUALITY HARDWARE



NON-RISE EDGEMOUNT HINGE

IDEAL FOR REACH-IN REFRIGERATORS & ICE BINS

- CONTEMPORARY SLEEK STYLING • HEAVY-DUTY DIE CAST ZAMAK CONSTRUCTION
- POLISHED CHROME FINISH • AVAILABLE IN THREE POPULAR OFFSETS
 - NON-HANDED FOR LEFT AND RIGHT HAND OPERATION
- UNIQUE ADJUSTING PLATE PROVIDES EASY ADJUSTMENT TO COMPENSATE FOR GASKET COMPRESSION
- SPRING ASSISTED MODELS AVAILABLE FOR ADDED CLOSING FORCE

B




R42-289x*

*WITH POWER SPRING
CONVERSION KIT



R42-288x

WITH ADJUSTABLE
SPRING CARTRIDGE

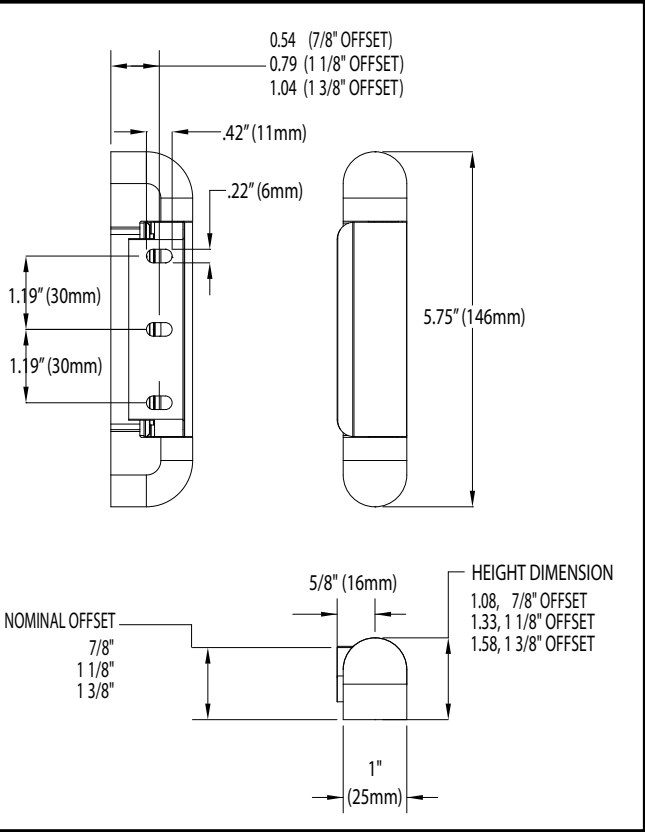

MODEL NO.	DESCRIPTION
R42-2880	Spring Cartridge Assy for R42-288X Series Hinges
R42-2883	Edgemount Adjustable Spring Hinge, CP, 1-3/8" Offset
R42-2890-K**	Spring Kit for K220 Series Hinges
R42-2893	Edgemount Spring Hinge, CP, 1-3/8" Offset

SPRING CONVERSION
KITS AVAILABLE



Model No.
R42-2890-K**



R42-2841
1-1/8" (28mm) OFFSET



R42-2842
FOR REFRIGERATION
APPLICATION
CHROME PLATED
1-1/8" (28mm) OFFSET




R42-2842-BB
FOR REFRIGERATION
APPLICATION
CHROME PLATED
1-1/8" (28mm) OFFSET
WITH BRASS BUSHINGS


NON-RISE / ADJUSTABLE REFRIGERATION EDGEMOUNT HINGES IDEAL FOR...REACH-IN REFRIGERATORS AND UNDERBAR EQUIPMENT

- NON-RISE FUNCTION ALLOWS FOR EASY DOOR SWING WITHOUT CONCERN FOR DOOR RISE
 - SERRATED ADJUSTING PLATE ALLOWS FOR QUICK AND EASY DOOR ADJUSTMENT TO COMPENSATE FOR DOOR SAG
- UNIVERSAL MOUNTING BRACKETS ALLOW FOR EITHER RIGHT OR LEFT HAND OPERATION
 - MOUNTING HOLE LOCATIONS ARE INTERCHANGEABLE WITH COMPETITORS' HINGES
 - ACCEPTS POWER SPRING CONVERSION KIT
- CHROME PLATED OR BRASS PLATED CONTEMPORARY STYLING
- SOLID ZINC DIE CAST CONSTRUCTION

R42-2841

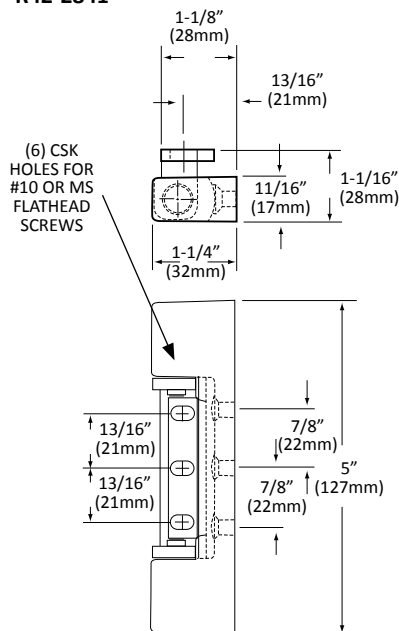


R42-2842 SERIES

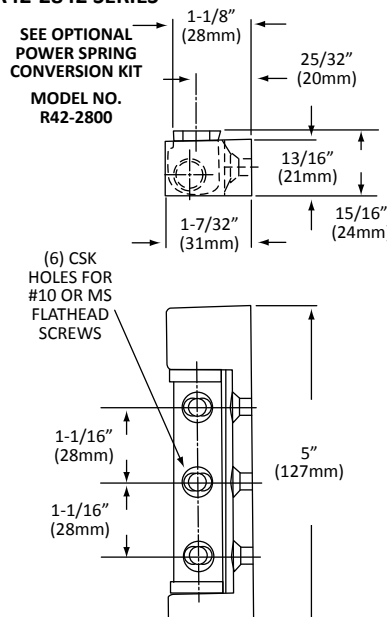

*REPLACES STANDARD-KEIL #2842 SERIES WITH COMPONENT HARDWARE QUALITY HARDWARE

Optional POWER SPRING CONVERSION KITS

- CONVERTS THE NON-RISE HINGE INTO A SELF-CLOSING HINGE
- IDEAL WHERE OVERHEAD DOOR CLEARANCE IS LIMITED
- EASILY SNAPS IN AND OUT WITHOUT TOOLS
- MAY BE USED FOR RIGHT AND LEFT HAND DOORS

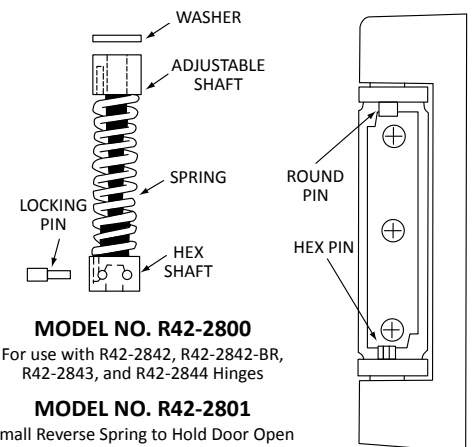

MODEL NO. R42-2800

For use with R42-2842, R42-2842-BR, R42-2843, and R42-2844 Hinges

MODEL NO. R42-2801

Small Reverse Spring to Hold Door Open

MODEL NO. R42-2810

For use with R42-2855 & R42-2000 Hinges

Non-Rise Edgemount Hinges



R42-2844
1-5/8" (41mm) OFFSET



R42-2000
1-3/8" (35mm) OFFSET






R42-2855
1-1/8" (28mm) OFFSET

NON-RISE / ADJUSTABLE HEAVY-DUTY EDMOUNT HINGES

DESIGNED FOR REACH-IN REFRIGERATORS AND UNDERBAR EQUIPMENT

- HEAVY-DUTY CONTEMPORARY STYLE LARGER NON-RISE HINGE ENGINEERED FOR USE ON HEAVIER DOORS
- UNIQUE ADJUSTING PLATE PROVIDES EASY VERTICAL AND HORIZONTAL MOUNTING ADJUSTMENT
 - ACCEPTS POWER SPRING CONVERSION KIT
 - NON-HANDED FOR RIGHT OR LEFT HAND APPLICATION
 - CHROME PLATED FINISH • BRONZE BUSHINGS

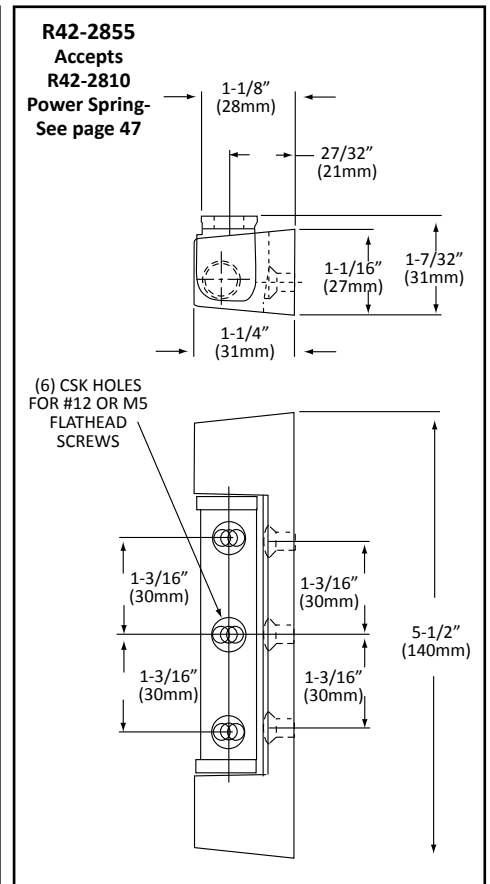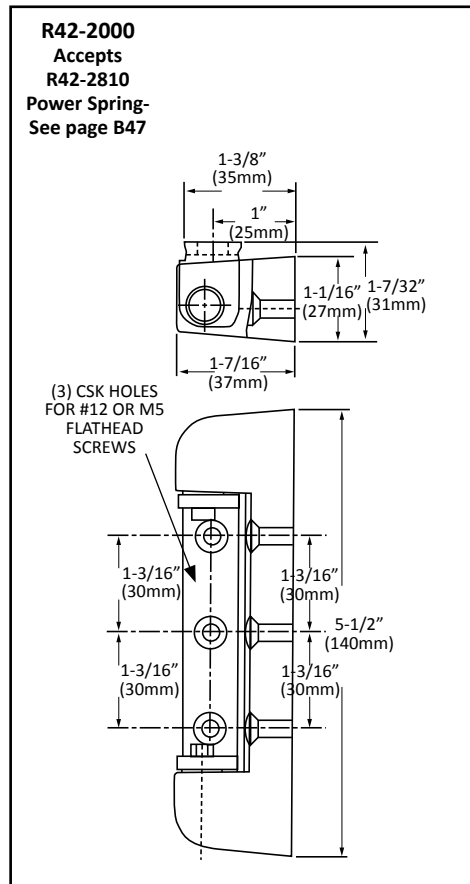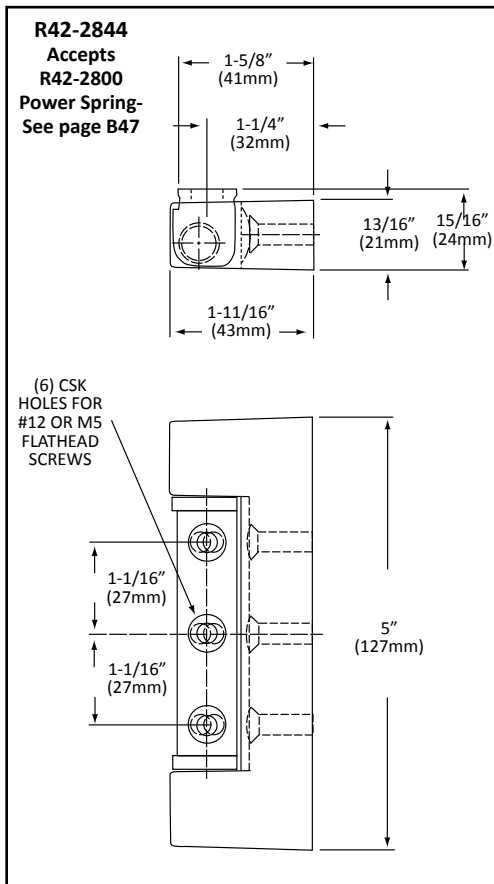



B



R20 SERIES
7/8" (22mm) and 1-3/16" (30mm) OFFSET



R40-1010
1-1/4" (32mm) OFFSET







R42-2840
7/8" (22mm) OFFSET

SLIM-LINE / STANDARD-DUTY EDGEMOUNT HINGES

IDEAL FOR UNDERBAR EQUIPMENT, STANDARD REACH-IN REFRIGERATORS AND FREEZERS

- EASY TO MOUNT
- HIGH PRESSURE DIE CAST ZAMAK
- POLISHED CHROME PLATED FINISH
- NON-RISE FUNCTION ALLOWS FOR QUICK AND EASY DOOR ADJUSTMENT TO COMPENSATE FOR DOOR SAG
 - CELCON SELF-LUBRICATING BUSHINGS PROVIDE SMOOTH, QUIET ACTION
- NON-HANDED FOR RIGHT AND LEFT HAND OPERATION
 - CONTEMPORARY STYLING

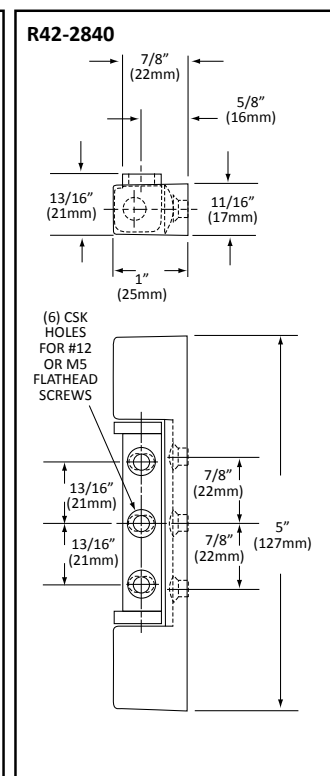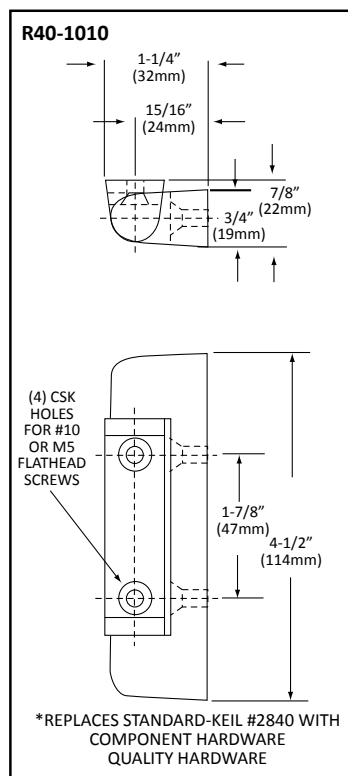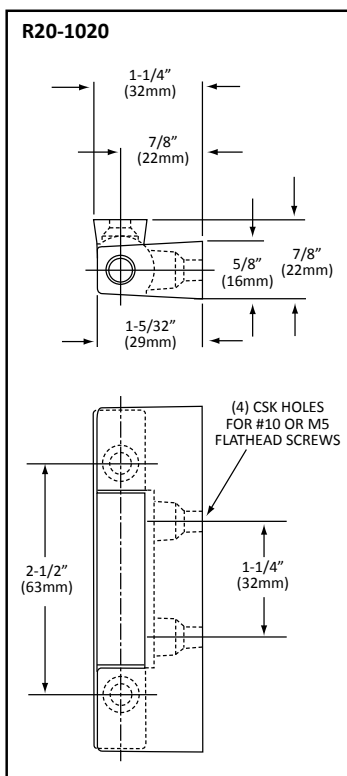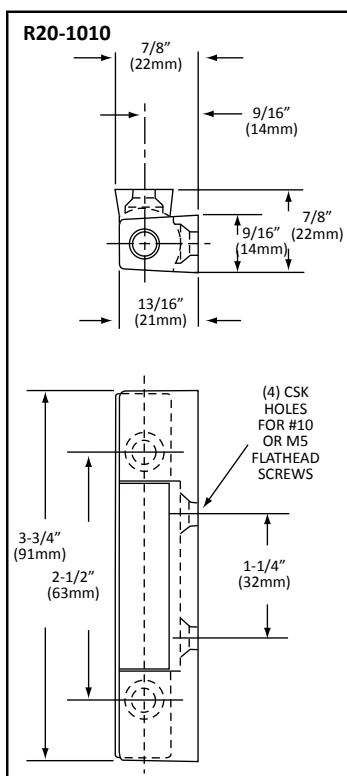

Lift-Off Edgemount Hinges



R45-1010
1-3/16" (30mm) OFFSET



R50-2850-SPO
1-3/8" (35mm) OFFSET



R50-2850-SS
1-5/8" (41mm) OFFSET



R50-2850
1-5/8" (41mm) OFFSET


LIFT-OFF / SELF CLOSING EDGEMOUNT HINGES

IDEAL FOR REACH-IN REFRIGERATORS AND DOORS EQUIPPED WITH MAGNETIC GASKETING


- CONTEMPORARY STYLING
- POLISHED CHROME PLATED FINISH* • HIGH PRESSURE DIE CAST ZAMAK*
- HOLD OPEN POSITION - CAM ALLOWS DOOR TO REMAIN IN HOLD OPEN POSITION AND REMAIN OPEN AT 120°
 - NON-HANDED - FOR RIGHT AND LEFT HAND OPERATION
 - ADJUSTABLE - TO COMPENSATE FOR GASKET WEAR
- POLISHED CHROME OR BLACK POWDER COATED FINISH*
- OVERCLOSE FEATURE...PROVIDES CONSTANT DOOR PRESSURE AND FULL GASKET SEAL

*R50-2850-SS IS SATIN FINISH STAINLESS STEEL

R45-1010*

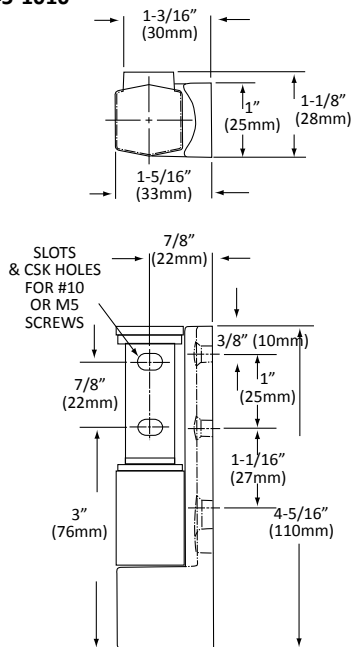


R50-2850-SPO**

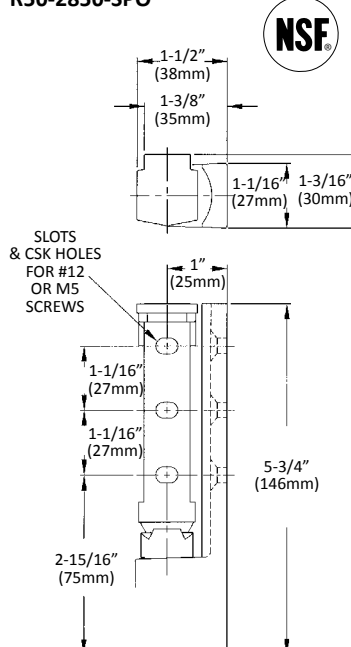

*REPLACES STANDARD-KEIL #2850 WITH COMPONENT HARDWARE QUALITY HARDWARE

R50 SERIES**

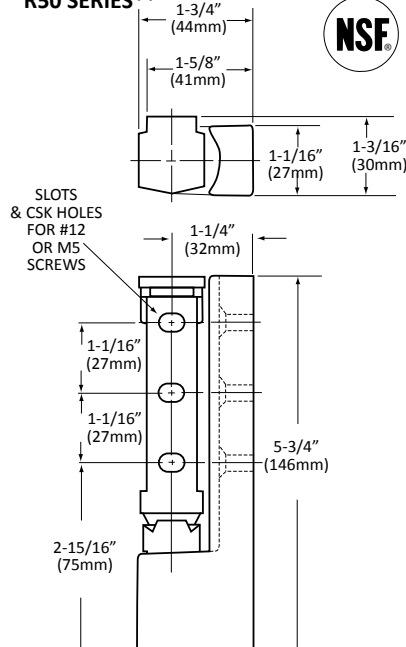

*REPLACES STANDARD-KEIL #2850 WITH COMPONENT HARDWARE QUALITY HARDWARE

Also available...

NON LIFT-OFF MODEL

Prevents accidental door removal when doors are left in open position. The retaining component is easily disengaged for door removal. All other hinge features are maintained.

MODEL NO.
R50-2850-NL
1-5/8" (41mm)




OFFSET
EDGEMOUNT
HINGE
NON LIFT-OFF
SPRING ASSISTED
MODEL NO.
R50-2851
1-1/58" (41mm)
OFFSET

* R45-1010 HINGES ARE FURNISHED WITH AN ADJUSTING PLATE FOR UP TO 3/16" (5mm) ADJUSTMENT. DRILLED AND COUNTERSUNK FOR #10 SCREWS.

** R50 SERIES HINGES ARE FURNISHED WITH AN ADJUSTING PLATE FOR UP TO 3/16" (5mm) ADJUSTMENT. DRILLED AND COUNTERSUNK FOR #12 SCREWS.



B

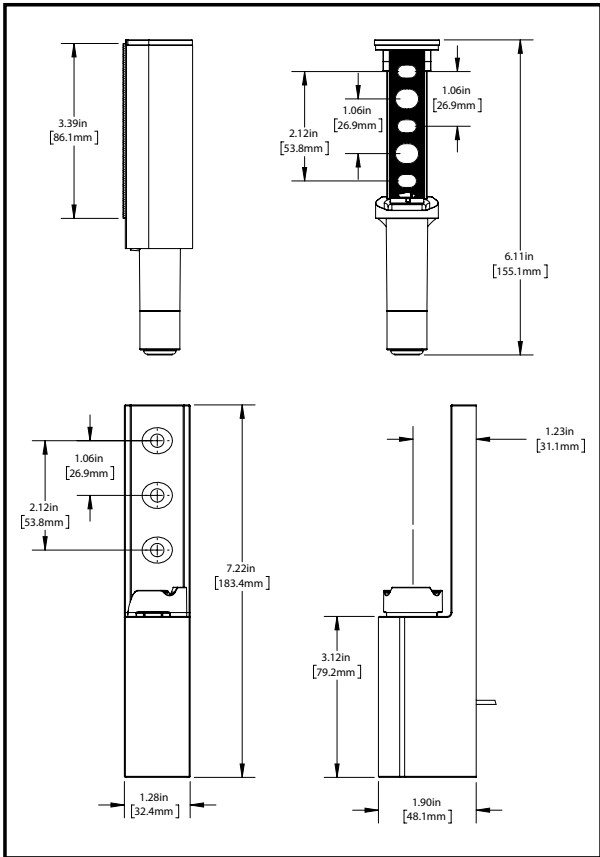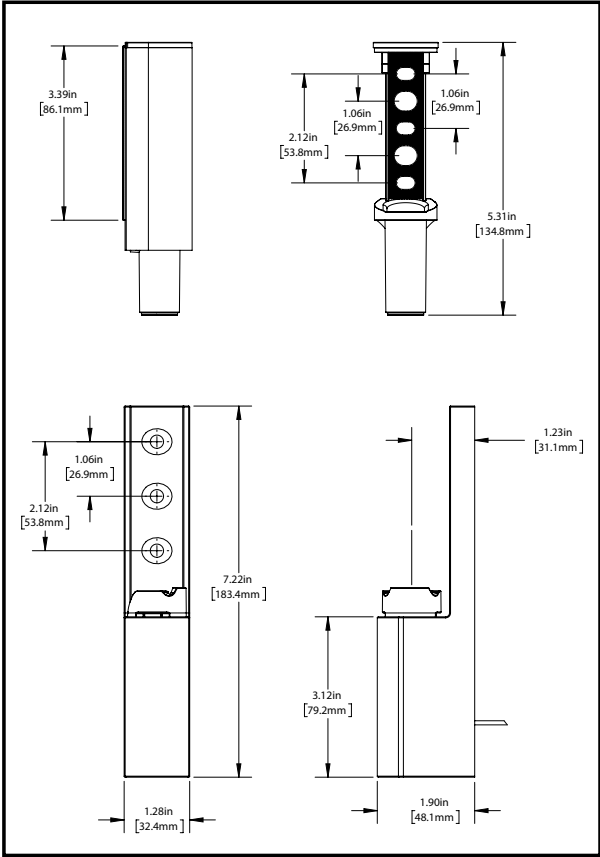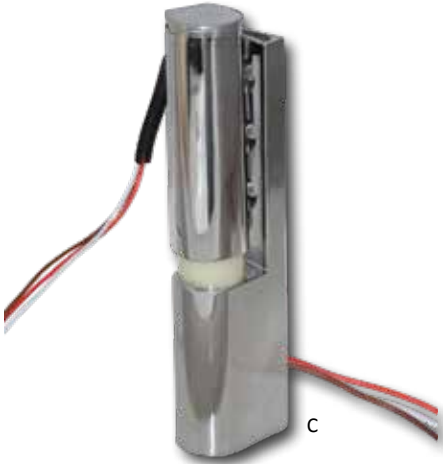

REF.	MODEL NO.	DESCRIPTION
A	R51-2000	Hinge, Electronic, Edgemount Lift-Off, No Switch
B	R51-2000-RS	Hinge, Electronic, Edgemount Lift-Off, w/Push Button Switch (2 wires to run one accessory)
C	R51-2000-CS	Hinge, Electronic, Edgemount Lift-Off, w/Connector Switch (3 wires to run two accessories)

R51-2000-RS SPECIFICATIONS

SWITCH TYPE: SPST, NORMALLY CLOSED
AMPS: 5A @ 125 VAC, 60HZ (UL RATED); 2.5A @ 250 VAC
WIRES: SUPPLIED WITH TWO WHITE 18 AWG, AWM, 300 VAC, 105°C
FLAMMABILITY RATING (WIRE): VW-1 (UL) AND FT1 (CSA)
FLAMMABILITY RATING (SWITCH BASE/PLUNGER): UL-94, V-2

R51-2000-CS SPECIFICATIONS

Integrated connector
Voltage: Either 48 VDC or VAC for one or two power delivery circuits
Amps: 5 Amps cumulative total
Wires: Supplied with one white (common), one red, and one brown, 18 AWG, AWM, 300 VAC, 105°C
Flammability Rating (Wire): VW-1 (UL) and FT1 (CSA)
Flammability Rating (Switch Base/Plunger): UL-94, V-2



Tested with standard 2

Hinge Replacement Parts



R40-1010 SERIES

REF.	MODEL NO.	DESCRIPTION
A	R40-X002	Cover
B	R40-X003	Adjustment Plate



R42-2840 SERIES

REF.	MODEL NO.	DESCRIPTION
A	R42-X038	Cover



R42-2842/43/44 SERIES

REF.	MODEL NO.	DESCRIPTION
A	R42-X003	Adjustment Plate
B	R42-X004	Cover
C	R42-X008	Adjustment Plate, Brass




R42-2855 SERIES

REF.	MODEL NO.	DESCRIPTION
A	R42-X020	Cover
B	R42-X021	Adjustment Plate



R42-2870/90 SERIES

REF.	MODEL NO.	DESCRIPTION
A	R42-X103	Cover



R45-1010 SERIES

REF.	MODEL NO.	DESCRIPTION
A	R45-X003	Adjustment Plate
B	R45-X004	Cover



R50 SERIES

REF.	MODEL NO.	DESCRIPTION
A	R50-X003	Cover
B	R50-X004	Cam, Old Style
C	R50-X004-A	Cam, New Style
D	R50-X004-C	Cam, New Style, No Switch Holes
E	R50-X005	Adjustment Plate



R50-SS SERIES

REF.	MODEL NO.	DESCRIPTION
A	R50-X003-SS	Cover, S/S
B	R50-X004-SS	Cam, Old Style, Glass Filled
C	R50-X004-SSA	Cam, New Style, Glass Filled
D	R50-X005-SS	Adjustment Plate, S/S



R56 SERIES CONCEALED POWER CARTRIDGE HINGE

- **HOLD OPEN DWELL** ALLOWS DOOR TO REMAIN OPEN AT 90° FOR EASE OF PRODUCT STOCKING
- **CUSHIONED STOP** IS EMPLOYED AT 115° TO ABSORB SHOCK, ELIMINATING DAMAGE TO FRAME, DOOR AND ADJACENT EQUIPMENT
- **SELF-CLOSING** NON-RISE SPRING ACTUATED CAM
- **OVERCLOSE DESIGN** ASSURES CONSTANT DOOR PRESSURE FOR FULL GASKET SEAL
- **SELF-LUBRICATING** DISSIMILAR CAM MATERIALS ASSURE SMOOTH OPERATION WITHOUT SUPPLEMENTARY LUBRICATION
- **SILENT & SMOOTH OPERATION**
- **REVERSIBLE APPLICATION** CARTRIDGE ASSEMBLY CAN BE USED FOR LEFT OR RIGHT HAND DOORS




PHOTOGRAPH SHOWS TOP MOUNTED CARTRIDGE ASSEMBLY.
WHERE SPACE REQUIRES, CARTRIDGE MAY BE BOTTOM MOUNTED.

SPECIFICATIONS:

- CASE:** DIE CAST ZAMAK
FINISH: CHROME PLATED OR OPTIONAL BLACK EPOXY POWDER COATED FINISH AVAILABLE
UPPER CAM: DIE CAST ZAMAK
LOWER CAM: NYLON
SPRING: COMPRESSION TYPE, SILICON WIRE
PIVOT GUIDE: NYLON

MODEL NO. R56-1010

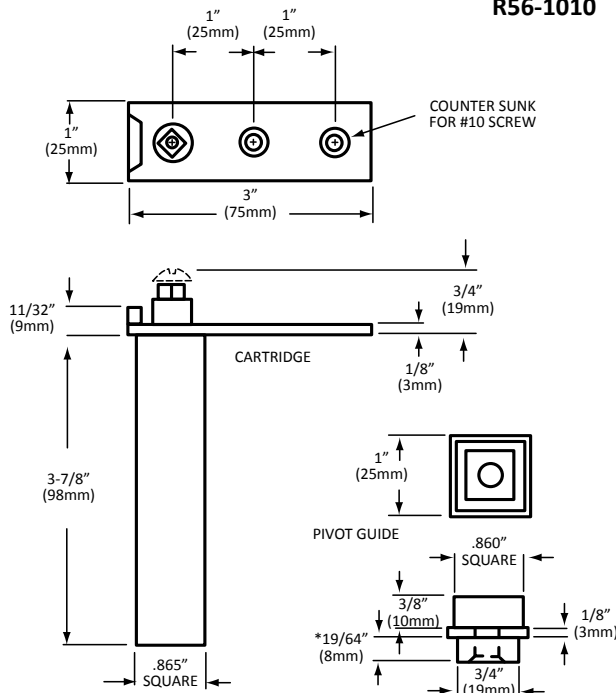


POWER CARTRIDGE ASSEMBLY

NOTE: Standard power cartridges are designed for doors weighing less than 60 lbs Heavy-duty models for doors over 60 lbs are available upon application.

*ALTERNATE CLEARANCE DIMENSION AVAILABLE

EXAMPLE:

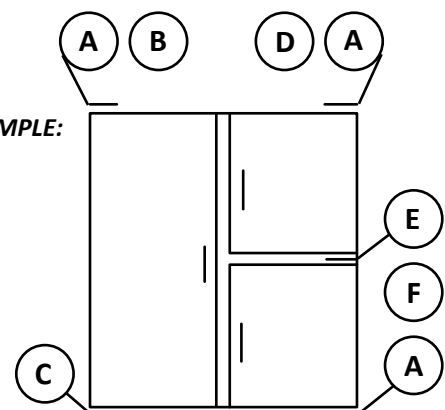

**SINGLE DOOR - LEFT HAND
HALF DOORS - RIGHT HAND**

ASSEMBLY WITH HORIZONTAL BRACKETS

- A (3) R56-1010 Cartridge Assemblies
 B (1) R56-5011 Cartridge Bracket L.H. Horizontal
 C (1) R56-7011 Pivot Bracket L.H. Horizontal
 D (1) R56-5010 Cartridge Bracket R.H. Horizontal
 E (1) R56-7040 Double Bracket R.H. Horizontal
 F (1) R56-5017 Cartridge Bracket L.H. Horizontal



CONCEALED PIVOT BRACKETS

MATERIAL HARDENED STEEL, CHROME PLATED
OPTIONAL: BLACK EPOXY POWDER COATED FINISH

- VERTICAL AND HORIZONTAL BRACKETS ACCOMMODATE VARIOUS CONSTRUCTION REQUIREMENTS

• BOTH ASSEMBLIES PROVIDE PERFECT OPERATION USING A PIVOT DISTANCE OF 1-15/16" (33mm)
CARTRIDGE AND PIVOT GUIDE INSTALLATION IS SIMPLE, REQUIRING A 7/8" (22mm) SQUARE OPENING IN BOTH TOP AND BOTTOM OF DOOR

- BRACKETS AND CARTRIDGES MUST BE ORDERED SEPARATELY. TO ASSIST IN SELECTING THE PROPER COMPONENTS
A TYPICAL APPLICATION EXAMPLE IS ILLUSTRATED PAGE B53

HORIZONTAL CARTRIDGE BRACKETS

WITH VERTICAL MOUNTING HOLES



MODEL NO. R56-5010
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-5011
LEFT HAND (OPPOSITE)

HORIZONTAL CARTRIDGE BRACKETS

WITH HORIZONTAL MOUNTING HOLES



MODEL NO. R56-5016
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-5017
LEFT HAND (OPPOSITE)

VERTICAL CARTRIDGE BRACKETS


WITH VERTICAL MOUNTING HOLES



MODEL NO. R56-6010
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-6011
LEFT HAND (OPPOSITE)

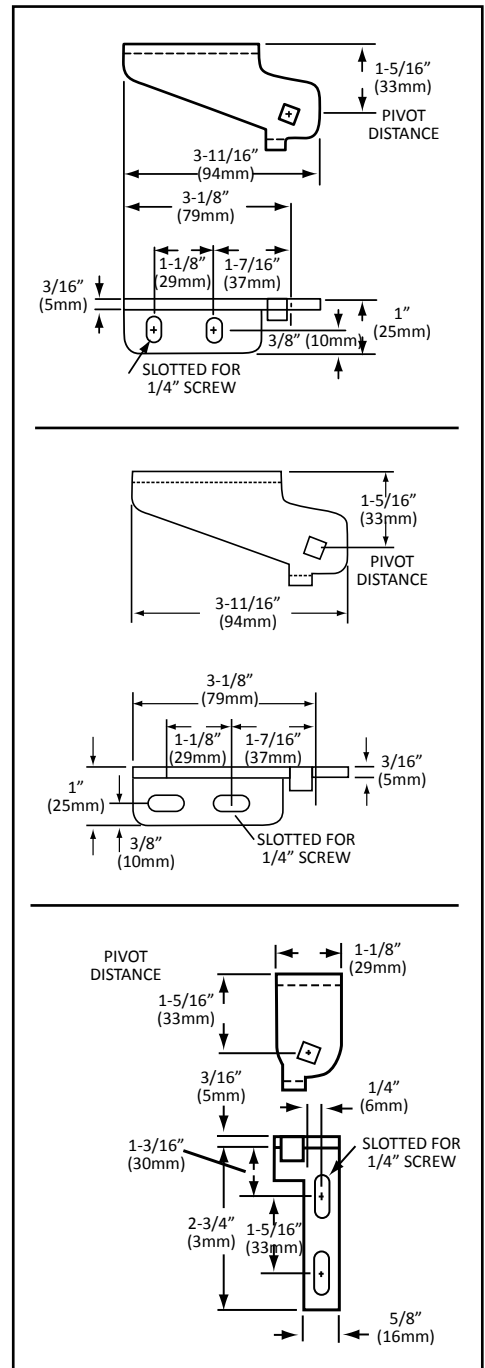



CONCEALED PIVOT BRACKETS

MATERIAL HARDENED STEEL, CHROME PLATED
OPTIONAL: BLACK EPOXY POWDER COATED FINISH

- VERTICAL AND HORIZONTAL BRACKETS ACCOMMODATE VARIOUS CONSTRUCTION REQUIREMENTS
 - BOTH ASSEMBLIES PROVIDE PERFECT OPERATION USING A PIVOT DISTANCE OF 1-15/16" (33mm)
- CARTRIDGE AND PIVOT GUIDE INSTALLATION IS SIMPLE, REQUIRING A 7/8" (22mm) SQUARE OPENING IN BOTH TOP AND BOTTOM OF DOOR
- BRACKETS AND CARTRIDGES MUST BE ORDERED SEPARATELY. TO ASSIST IN SELECTING THE PROPER COMPONENTS A TYPICAL APPLICATION EXAMPLE IS ILLUSTRATED PAGE B53

HORIZONTAL PIVOT BRACKETS


WITH HORIZONTAL MOUNTING HOLES



MODEL NO. R56-7010
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-7011
LEFT HAND (OPPOSITE)

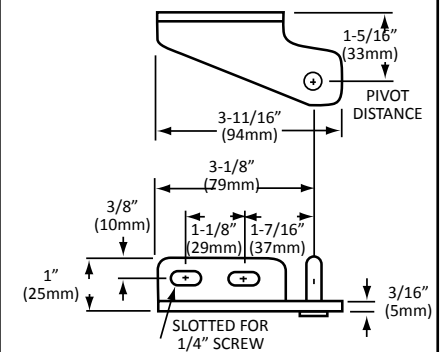

HORIZONTAL PIVOT BRACKETS


WITH VERTICAL MOUNTING HOLES



MODEL NO. R56-7014
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-7015
LEFT HAND (OPPOSITE)

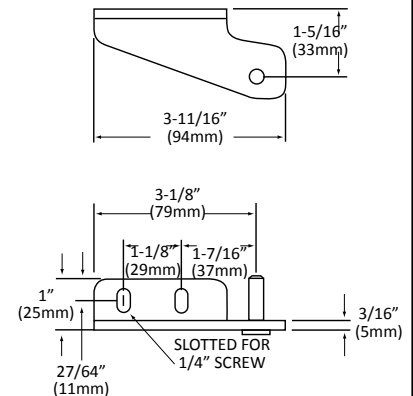

HORIZONTAL INTERMEDIATE PIVOT BRACKETS


WITH HORIZONTAL MOUNTING HOLES



MODEL NO. R56-7040*
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-7041*
LEFT HAND (OPPOSITE)

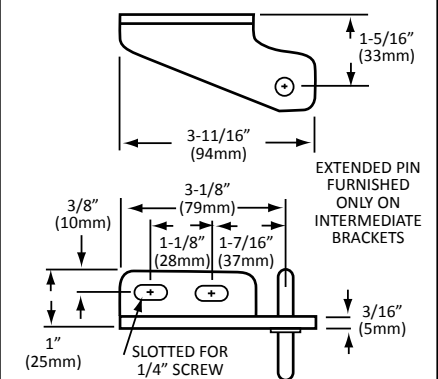

*Non-stock items. Special order only. Please call for quote.



CONCEALED PIVOT BRACKETS

MATERIAL HARDENED STEEL, CHROME PLATED
OPTIONAL: BLACK EPOXY POWDER COATED FINISH

- VERTICAL AND HORIZONTAL BRACKETS ACCOMMODATE VARIOUS CONSTRUCTION REQUIREMENTS

- BOTH ASSEMBLIES PROVIDE PERFECT OPERATION USING A PIVOT DISTANCE OF 1-15/16" (33mm)

CARTRIDGE AND PIVOT GUIDE INSTALLATION IS SIMPLE, REQUIRING A 7/8" (22mm) SQUARE OPENING IN BOTH TOP AND BOTTOM OF DOOR

- BRACKETS AND CARTRIDGES MUST BE ORDERED SEPARATELY. TO ASSIST IN SELECTING THE PROPER COMPONENTS A TYPICAL APPLICATION EXAMPLE IS ILLUSTRATED PAGE B53

VERTICAL INTERMEDIATE PIVOT BRACKETS


WITH ROUND MOUNTING HOLES



MODEL NO. R56-8040
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-8041
LEFT HAND (OPPOSITE)

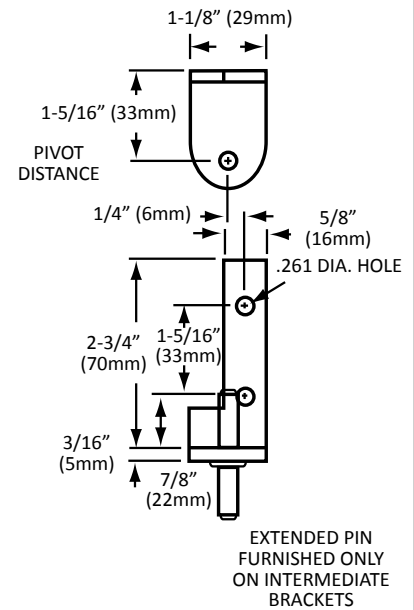

VERTICAL PIVOT BRACKETS


WITH ROUND MOUNTING HOLES



MODEL NO. R56-8010
RIGHT HAND (AS ILLUSTRATED)



MODEL NO. R56-8011
LEFT HAND (OPPOSITE)

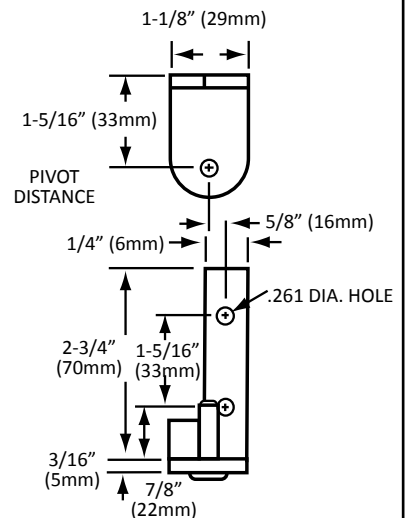




SECURITY LOCK


- HIGH POLISH CHROME FINISH
- EASY INSTALLATION
- VERTICAL AND HORIZONTAL ADJUSTMENTS
- FOUR-DISC CYLINDER PROVIDES EXTRA SECURITY
- BLACK PLASTIC CAPS INCLUDED
- COMPATIBLE WITH GLASS AND MOST OTHER DOORS

**MODEL NO.
P99-100SL-01
SECURITY LOCK**

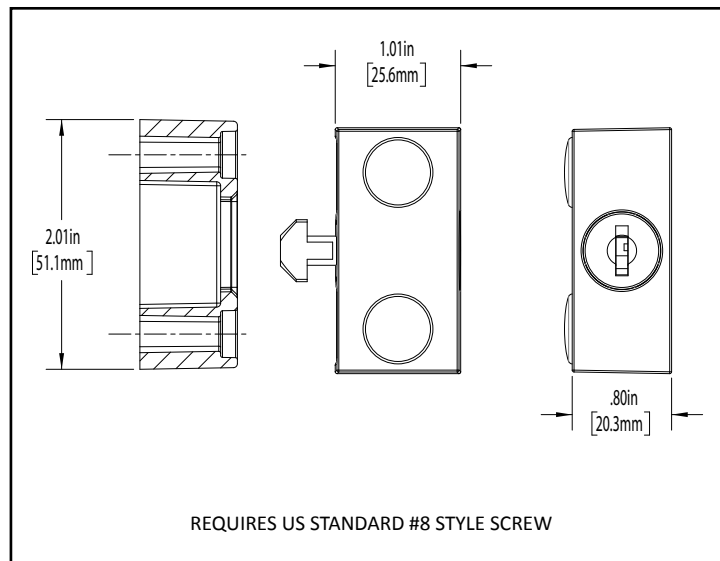



B

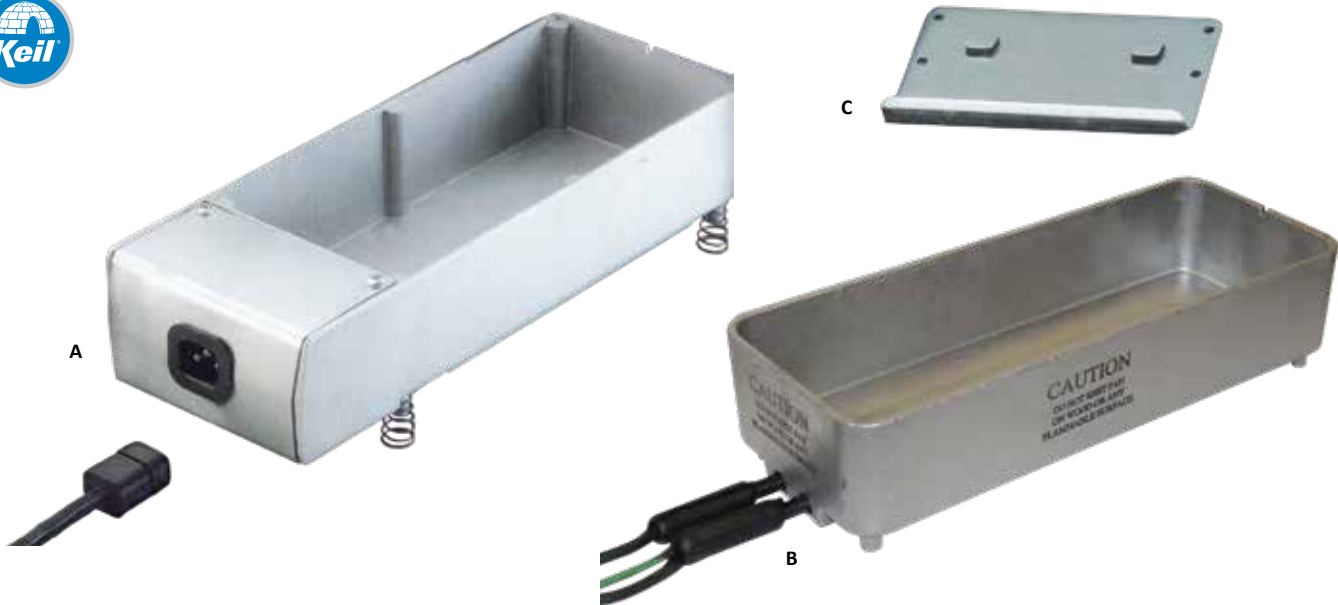

REF. A

UL-PTC EVAPMATIC
CONDENSATE EVAPORATORS
FEATURES


- ALL MODELS U.L. RECOGNIZED (FILE #SA7009)
- HEATER PAD WITH PTC RESISTOR WIRE CONSERVES ENERGY BY SELF-REGULATING THE WATTAGE REQUIRED TO BURN OFF CONDENSATE IN THE PAN
- 160, 190 AND 300 WATT MODELS • 117 AND 220 VOLT MODELS
- DIE CAST ALUMINUM CONSTRUCTION • 50 oz (1479ml) CAPACITY
- REMOVABLE CORDSETS WITH MOLDED PLUGS
- CE APPROVED MODELS FOR EUROPEAN 160 AND 300 WATT, 230 VOLT APPLICATIONS

U.L. MODEL NO.	C.S.A. MODEL NO.	WATTAGE	VOLTAGE	CAPACITY	EVAPORATOR rate/hr.
T12-0370	-	160	117	50 oz (1479ml)	3 oz (90ml)
T12-0372	-	160	220	50 oz (1479ml)	3 oz (90ml)
T12-5000	-	300	117	50 oz (1479ml)	5.75 oz (170ml)
T12-5200	-	300	220	50 oz (1479ml)	5.75 oz (170ml)
-	T12-5000-CSA	190	117	50 oz (1479ml)	5.4 oz (160ml)
-	T12-5200-CSA	190	220	50 oz (1479ml)	5.4 oz (160ml)
T12-0372-CE		160	230	50 oz (1479ml)	3 oz (90ml)
T12-0372-CE48		160	230	50 oz (1479ml)	3 oz (90ml)
T12-0372-CE84		160	230	50 oz (1479ml)	3 oz (90ml)
T12-5200-CE		300	230	50 oz (1479ml)	5.75 oz (170ml)
T12-5200-CE48		300	230	50 oz (1479ml)	5.75 oz (170ml)
T12-5200-CE84		300	230	50 oz (1479ml)	5.75 oz (170ml)

SPECIFICATIONS:

- VOLUME:** 50 FLUID OUNCES (1479 ml)
O.A. SIZE: 4-3/4" X 12-1/2" X 2-3/4"
(120mm X 317mm X 70mm)
PAN: DIE CAST ALUMINUM
CORDSET: REMOVABLE, 18" (457mm) LONG STANDARD
LEGS: WIRE SPRING TYPE

NOTE: LONGER CORDSETS WITH OR WITHOUT MOLDED PLUGS ARE AVAILABLE UPON APPLICATION



REF. B

BASIC CONDENSATE EVAPORATOR

- STANDARD SIZE
- DIE CAST ALUMINUM CONSTRUCTION
 - 18" (457mm) LG. WIRE LEADS
 - 34 oz (1000ml) CAPACITY


MODEL NO. T10-3351
(160 WATTS, 117 VOLTS)


SPECIFICATIONS:

- VOLUME:** 34 FLUID OUNCES (1000ml)
O.A. SIZE: 4" X 10-1/8" X 3"
(102mm X 260mm X 76mm)
PAN: DIE CAST ALUMINUM
WIRE LEADS: 18" (457mm) LONG
LEGS: WIRE SPRING TYPE

REF. C

MODEL NO.
T12-3390

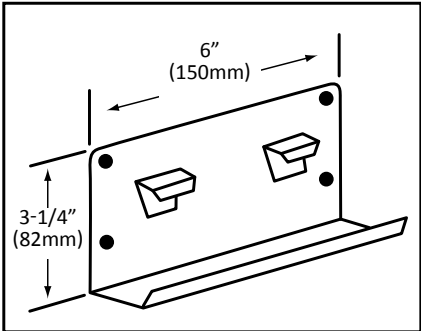

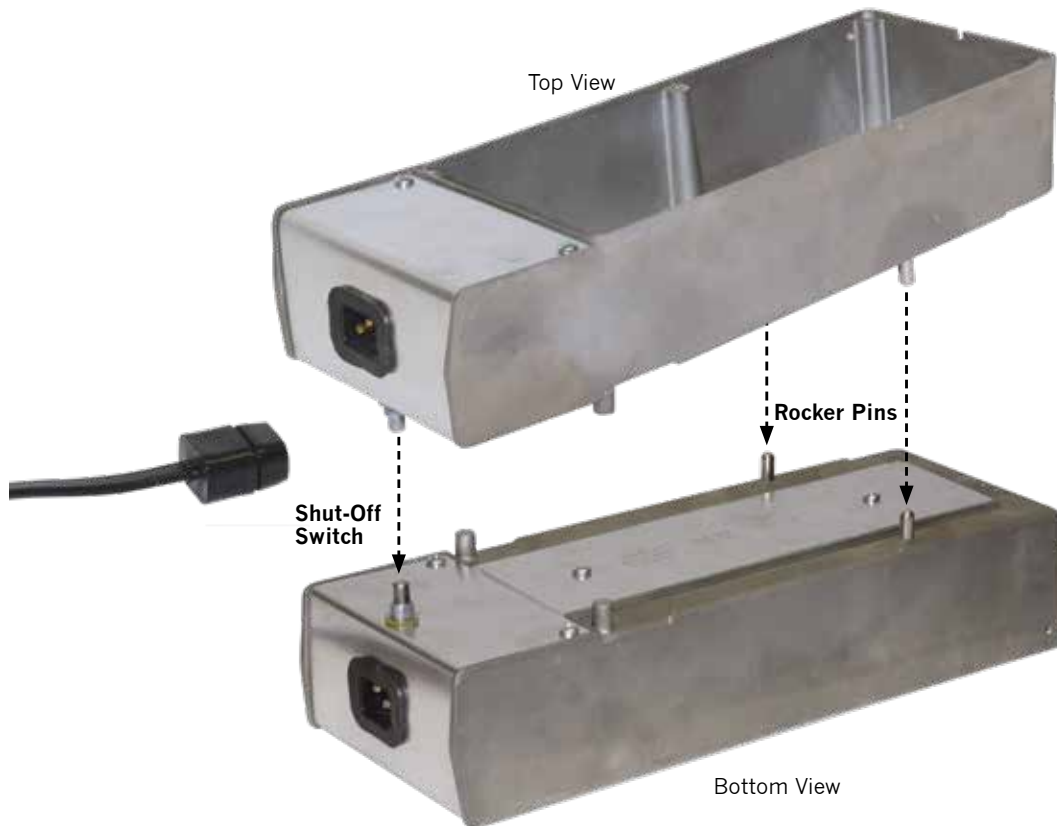

UL-PTC EVAPMATIC CONDENSATE EVAPORATORS WITH ENERGY-SAVING ON/OFF PRESSURE SWITCH


- WEIGHT-SENSING ON/OFF PRESSURE SWITCH AND ROCKER PINS ON BOTTOM OF UNIT REDUCE ENERGY CONSUMPTION BY ONLY ACTIVATING THE EVAPORATOR WHILE WATER IS PRESENT IN THE PAN
- HEATER PAD WITH PTC RESISTOR WIRE FURTHER CONSERVES ENERGY BY SELF-REGULATING THE WATTAGE REQUIRED TO BURN OFF CONDENSATE IN THE PAN
- 160 WATT AND 300 WATT MODELS AVAILABLE • 117 VOLT AND 220 VOLT MODELS AVAILABLE
 - 50 FL. OZ. (1479ml) DIE CAST ALUMINUM PAN
 - 18" (457mm) GROUNDED REMOVABLE CORD SET (OTHER LENGTHS AVAILABLE WITH OR WITHOUT PLUG)

U.L. MODEL NO.	WATTAGE	VOLTAGE	CAPACITY	EVAPORATOR rate/hr.
T12-0370-P	160W	117V	50 oz (1479ml)	3 oz (90ml)
T12-0372-P	160W	220V	50 oz (1479ml)	3 oz (90ml)
T12-5000-P	300W	117V	50 oz (1479ml)	5.75 oz (170ml)
T12-5200-P	300W	220V	50 oz (1479ml)	5.75 oz (170ml)






REFRIGERATOR / FREEZER THERMOMETERS

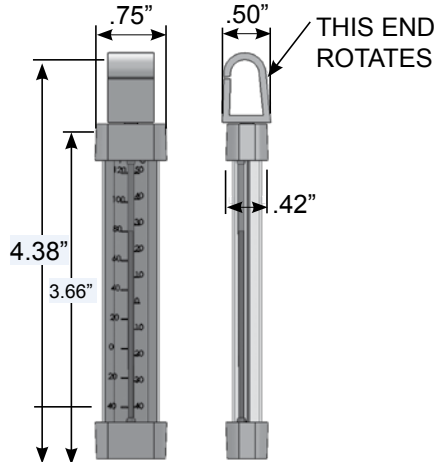


ECONOMICAL REFRIGERATOR / FREEZER THERMOMETER MODEL NO. T90-330

- DUAL SCALE TEMPERATURE RANGE -40° TO 120°F (-40° TO 50°C)
- NON-TOXIC SOLUTION IN COMPLETELY SEALED GLASS TUBE
- HANGS FROM SHELF OR FASTENS PERMANENTLY
- UNIQUE 360° SWIVEL MOUNTING BRACKET

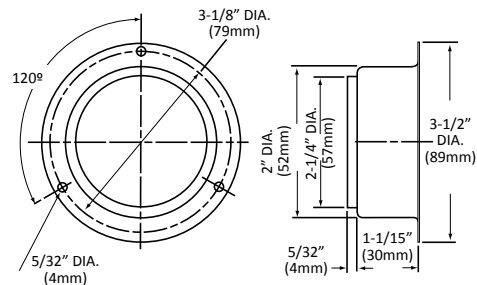



SURFACE MOUNT THERMOMETER MODEL NO. T90-6812

- DUAL SCALE TEMPERATURE RANGE -40° TO 65°F (-40° TO 20°C)
- STAINLESS STEEL HOUSING
- 2" DIAL - 3-1/2" FLANGE
- RECALIBRATEABLE
- ACCURACY + 2% • 48" CAPILLARY

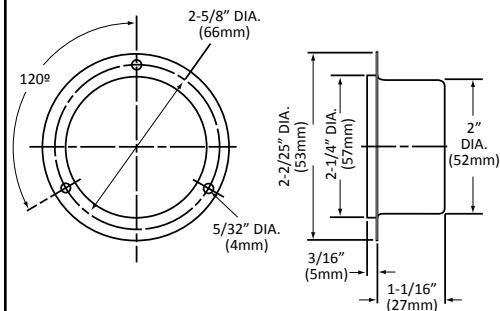

FLUSH FRONT RECESSED MOUNT THERMOMETER MODEL NO. T90-6142

- DUAL SCALE TEMPERATURE RANGE -40° TO 65°F (-40° TO 20°C)
- STAINLESS STEEL HOUSING
- ACCURACY + 2% • 2" DIAL - 3" FLANGE
- RECALIBRATEABLE • 48" CAPILLARY

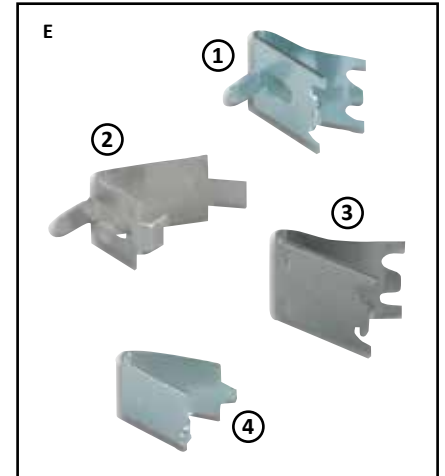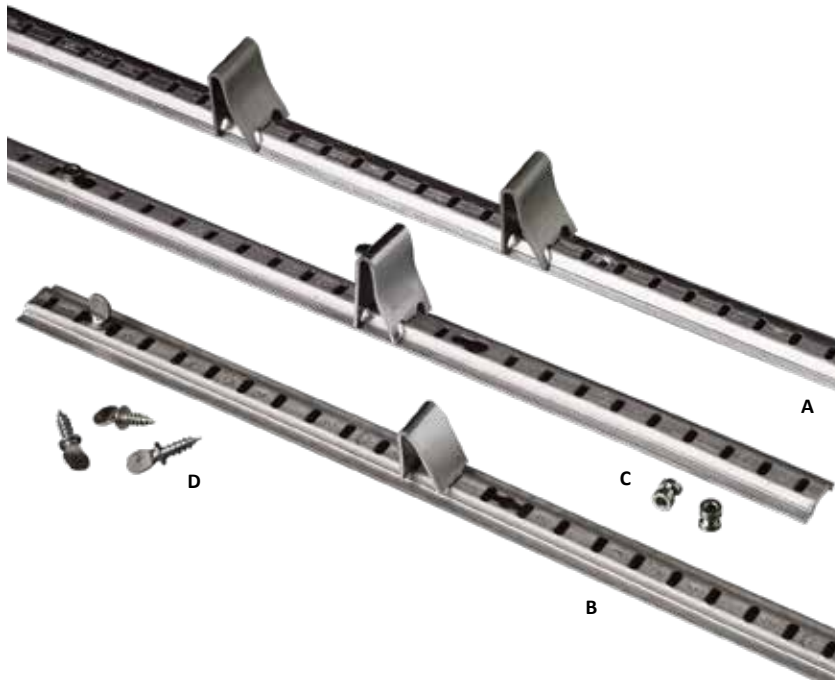

REF. A CONVENTIONAL TYPE PILASTER

ALUMINUM MODEL NO.	STAINLESS STEEL MODEL NO.	LENGTH
T22-0024	T22-1024	24" (610mm)
T22-0036	T22-1036	36" (914mm)
T22-0042	T22-1042	42" (1067mm)
T22-0048	T22-1048	48" (1219mm)
T22-0060	T22-1060	60" (1524mm)
T22-0072	T22-1072	72" (1828mm)
T22-0144	T22-1144	144" (3658mm)

NOTE: SPECIAL LENGTHS AVAILABLE UPON APPLICATION.
SHELF SLOTS ARE 1/2" ADJUSTMENT. COUNTERSUNK
MOUNTING HOLES EQUALLY SPACED ON 6" CENTERS
AND WILL ACCEPT #4 FLAT HEAD SCREWS
OR STANDARD POP-RIVETS.

REF. B REMOVABLE TYPE PILASTER

ALUMINUM MODEL NO.	STAINLESS STEEL MODEL NO.	LENGTH
T23-0024	T23-1024	24" (610mm)
T23-0036	T23-1036	36" (914mm)
T23-0042	T23-1042	42" (1067mm)
T23-0048	T23-1048	48" (1219mm)
T23-0060	T23-1060	60" (1524mm)
T23-0072	T23-1072	72" (1828mm)
T23-0144	T23-1144	144" (3658mm)

NOTE: SPECIAL LENGTHS AVAILABLE UPON
APPLICATION. SHELF SLOTS ARE 1/2" ADJUSTMENT.
KEYHOLE SLOTS EQUALLY SPACED ON 6" CENTERS.
DESIGNED FOR USE WITH REMOVABLE
THUMBSCREW MODEL NO. T32-5020.

REF. C KEYHOLE TYPE PILASTER

ALUMINUM MODEL NO.	STAINLESS STEEL MODEL NO.	LENGTH
T21-0024	T21-1024	24" (610mm)
T21-0036	T21-1036	36" (914mm)
T21-0042	T21-1042	42" (1067mm)
T21-0048	T21-1048	48" (1219mm)
T21-0060	T21-1060	60" (1524mm)
T21-0072	T21-1072	72" (1828mm)
T21-0144	T21-1144	144" (3658mm)

NOTE: SPECIAL LENGTHS AVAILABLE UPON
APPLICATION. SHELF SLOTS ARE 1/2" ADJUSTMENT.
KEYHOLE SLOTS EQUALLY SPACED ON 6" CENTERS.
DESIGNED FOR USE WITH KEYHOLE SUPPORT
MODEL NO. T34-1010.

REF. D

STAINLESS STEEL THUMBSCREW

MODEL NO. T32-5020

SIZE: #8 x 1/2" (13mm) LONG

POP-RIVET TYPE KEYHOLE SUPPORT


MODEL NO. T34-1010

BRASS NICKEL PLATED MATERIAL
USE WITH 1/8" DIA.
X 1/3" LG. RIVETS
(3mm DIA. x 7.5mm) LONG

REF. E

SNAP-IN SHELF SUPPORTS

REF.	MODEL NO.	MATERIAL	"A" TAB HEIGHT	"B" CLIP WIDTH
1	T30-5130	Stainless Steel	7/16" (11mm)	7/8" (22mm)
1	T30-5130-TAB	Stainless Steel	1/4" (6mm)	7/8" (22mm)
1	T30-5131	Zinc Plated	7/16" (11mm)	7/8" (22mm)
3	T30-5030	Stainless Steel	-	7/8" (22mm)
4	T30-5031	Zinc Plated	-	5/8" (16mm)
4	T30-5032	Stainless Steel	-	5/8" (16mm)
2	T30-5050	Zinc Plated For H.D. Sq.	1/2" (13mm)	3/4" (19mm)
2	T30-5051	Aluminum For H.D. Sq.	1/2" (13mm)	3/4" (19mm)
2	T30-5055	Stainless Steel FOR H.D. Sq.	1/2" (13mm)	3/4" (19mm)
1	T30-9901-UT	Zinc Plated	1/4" (6mm)	7/8" (22mm)

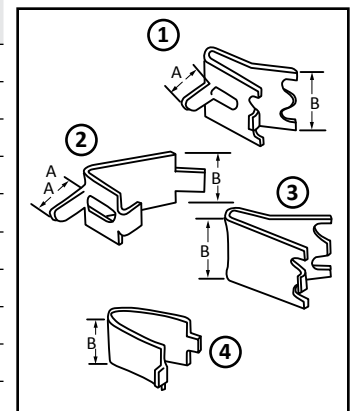



B



REF. A

THERMAL MASTIC HEAT TRANSFER COMPOUND

- REPLACES* SOLDER FOR HEAT TRANSMISSION
- STABLE AT ALL WORKING TEMPERATURES
- DOES NOT HARDEN OR LOSE ADHESION AT -50°F (-45°C)
 - WILL NOT FLOW AT 220°F (104°C)
 - FLASHPOINT: 450°F (32°C)

THERMAL MASTIC CAN BE USED WHEREVER RAPID TRANSMISSION IS DESIRED...BETWEEN COILS AND LINERS, BETWEEN LIQUID AND SUCTION LINE HEAT EXCHANGERS.

THERMAL MASTIC COATING

10.3 oz (305ml) TUBE CARTRIDGE

MODEL NO. Q77-1000

1 gal (3.7 lit) CONTAINER

MODEL NO. Q77-1240

5 gal (19 lit) CONTAINER

MODEL NO. Q77-1250

53 gal (200 lit) CONTAINER

MODEL NO. Q77-1260

REF. B

THERMAL MASTIC CAULKER

10.3 oz (305ml) CAULKING GUN

MODEL NO. Q99-1000

REF. C

FLEXIBLE INSULATING CONDUIT SLEEVE

- **FULL PROTECTION**
OF ELECTRICAL AND OTHER SUPPLY LINES PASSING THROUGH METAL SKIN REFRIGERATION PANELS
- **CLEAN APPEARANCE**
PROVIDES A PROFESSIONAL FINISHED LOOK
- **LABOR SAVING**
ELIMINATES THE NEED FOR COSTLY TAILPIECE ASSEMBLIES AND WELDED JOINTS
- **COMPENSATING FLEXIBLE HEAD**
FITS ALL PANEL THICKNESSES FROM 2" (51mm) TO 2-1/4" (57mm)
- **PROVIDES A FULL 1-1/4" (32mm)**
DIAMETER PASS THRU OPENING FOR ALL EXTERNAL SUPPLY LINES

MODEL NO. R90-1002


MATERIAL: BLACK PVC
REQUIRES A 1-5/8" (41mm) CLEARANCE HOLE

REF. D

RUBBER GROMMETS

LARGE DIAMETER RUBBER GROMMETS


MODEL NO.	A	B	C	D	E
Q24-0420	1-7/8" (47mm)	1-1/8" (28mm)	3/8" (9mm)	1/16" (1.5mm)	1-1/2" (38mm)
Q24-0520	2-7/8" (73mm)	2-1/8" (54mm)	7/16" (11mm)	1/16" (1.5mm)	2-1/2" (63mm)

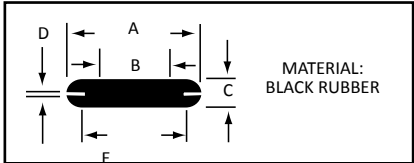




MICRO-MINI VENT PORT™
PRESSURE RELIEF PORTS FOR REACH-IN COOLERS
MODEL NO. R88-1000

- DESIGNED FOR 3" WALL THICKNESS
- FAST PRESSURE EQUALIZATION
- CORROSION & VERMIN PROOF
- INSULATED CONSTRUCTION
 - TWO-WAY AIR FLOW
 - FULL SIZE PORTS
 - 2" (51mm) DIA.




B

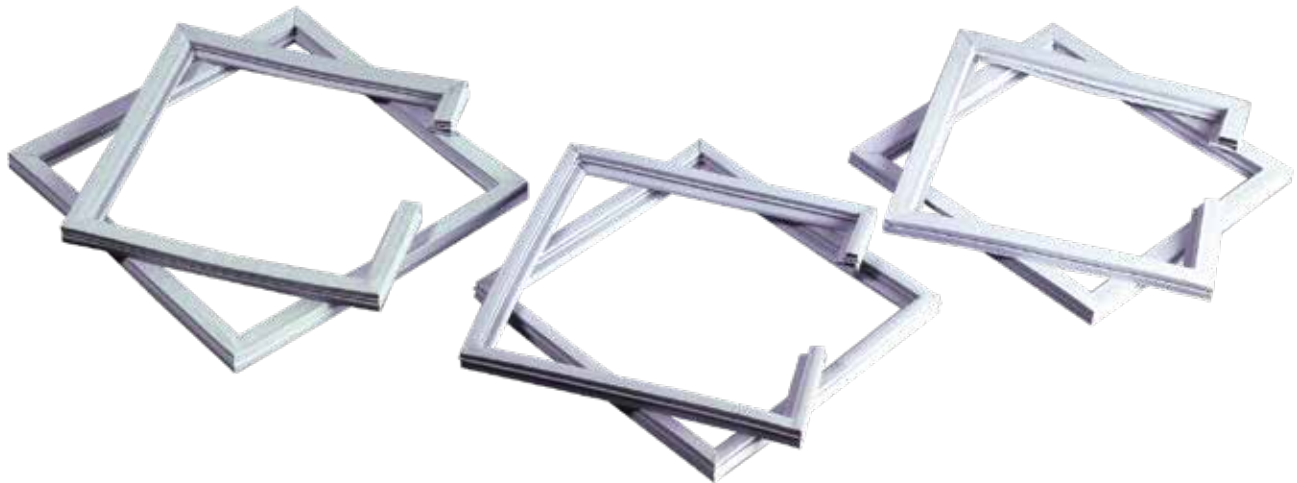


**COMPLETE
MAGNETIC GASKET FRAMES
WITH WELDED CORNERS**


- DURABLE GRAY PVC
- CUSTOM MADE SIZES • NO TOOLING CHARGES
- ECONOMICAL - NO WASTE
- AVAILABLE IN THREE INDUSTRY STANDARD PROFILES



MODEL NO. 6449




MODEL NO. 5270




MODEL NO. 1094

WHEN ORDERING MAGNETIC GASKET FRAMES SPECIFY MODEL NO. AND EXACT OUTSIDE DIMENSIONS OF FRAME
NOTE: GASKET FRAMES ARE ALSO AVAILABLE WITH MAGNET ON 3 SIDES, COMPLETE WITH PLUGGED ENDS
MINIMUM ORDER 25 FRAMES PER SIZE

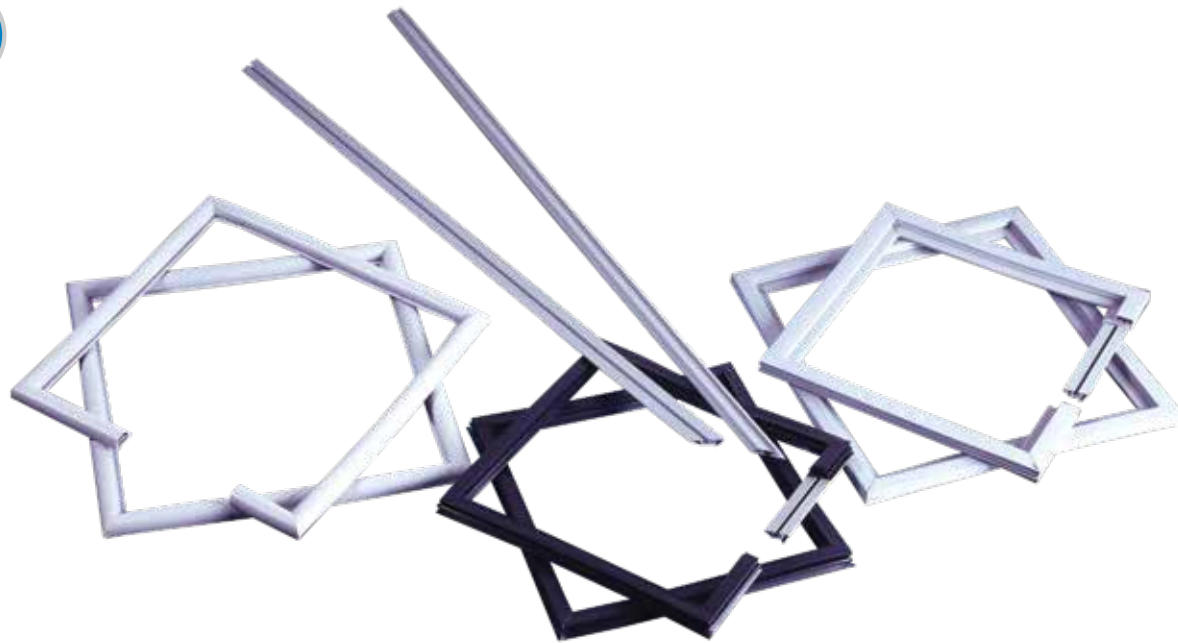

COMPLETE COMPRESSION GASKETS FRAMES with WELDED CORNERS

- DURABLE GRAY PVC
- CUSTOM MADE SIZES
- NO TOOLING CHARGE
- ECONOMICAL - NO WASTE

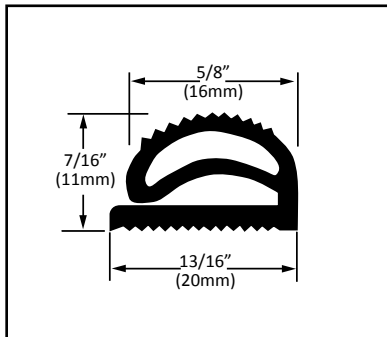

WHEN ORDERING
COMPRESSION GASKET FRAMES
SPECIFY

MODEL NO. 5804*
AND EXACT OUTSIDE DIMENSIONS


MINIMUM ORDER...
25 FRAMES PER SIZE

*UTILIZES T42-3330 GASKET


SNAP-IN REMOVABLE MAGNETIC GASKET FRAMES and RETAINER STRIP

- FOR FOAMED IN PLACE INSULATION
- FAST INSTALLATION • SNAPS INTO POSITION
- NO SPECIAL TOOLS REQUIRED • NO FASTENERS REQUIRED
- AVAILABLE IN GRAY OR BLACK PVC

FURNISHED AS COMPLETE GASKET FRAMES WITH WELDED CORNERS

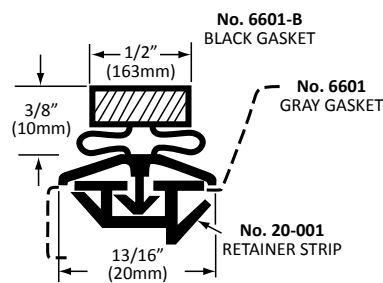


MODEL NO. 6601-B & 6601
ARE SINGLE DUROMETER GASKET

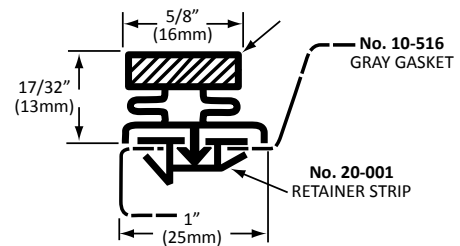

MODEL NO. 10-516
IS A DUAL DUROMETER GASKET

WHEN ORDERING SNAP-IN MAGNETIC GASKET FRAMES SPECIFY MODEL NO. AND EXACT
CENTERLINE DIMENSIONS OF FRAME. MINIMUM ORDER 25 FRAMES PER SIZE.
OTHER COLORS AVAILABLE UPON REQUEST.

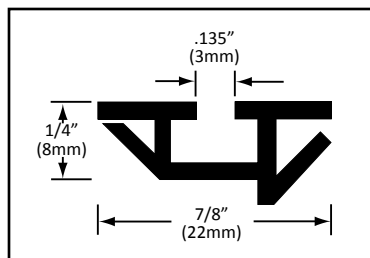

WHEN ORDERING
RETAINER STRIPS SPECIFY


MODEL NO. 20-001
AND LENGTH REQUIRED



GRAY PVC COMPRESSION GASKET


- GREASE RESISTANT • EASY TO CLEAN
- DURABLE - NO WASTE

MODEL NO. T42-3330
200 FT. (76mm) ROLL



MAGNETIC GASKET KITS

- NEUTRAL GRAY PVC
- FULLY WELDED CORNERS
- EASY INSTALLATION
- MINIMIZES INVENTORY



STRAIGHT KIT
GFK-6449-S
24 LENGTHS
36" (915mm) LG.

CORNER KIT
GFK-6449-C
24 PER BOX
12 R.H. and 12 L.H.
12" X 18"
(305mm x 457mm)



B



**FLAT
BREAKER STRIP**


- MATTE GRAY ABS - MAR FREE
- PAPER MASKED ONE SIDE
- WILL NOT ABSORB ODORS
- USDA and FDA APPROVED

MODEL NO.	WIDTH
T54-0937	15/16" (24mm)
T54-1500	1-1/2" (38mm)
T54-1750	1-3/4" (44mm)
T54-2000	2" (51mm)
T54-2250	2-1/4" (57mm)
T54-2750	2-3/4" (70mm)
T54-3000	3" (76mm)

NOTE: FURNISHED IN 6 ft (1830mm) LENGTHS
WITH A STANDARD THICKNESS OF .110 (2.8mm).
SPECIAL SIZE WIDTHS AVAILABLE ON QUANTITY ORDERS

**MOLDED PLASTIC
CORNER**

FOR USE WITH
T55-20-011 (2-5/16" WIDE)
BREAKER STRIP ONLY. PROVIDES
FINISHED APPEARANCE

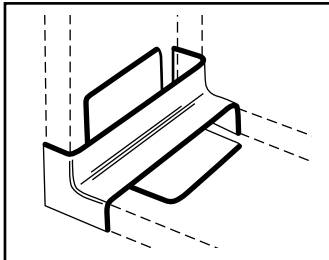


MODEL NO. T55-0598
COLOR: GRAY
TO MATCH BREAKER STRIP

**EXTRUDED...SNAP-ON
BREAKER STRIP**

- MATTE GRAY PVC - MAR FREE
- EASILY CUT • ODORLESS
- USDA and FDA APPROVED

TWO-PIECE SNAP-ON BREAKER STRIP

BOTTOM STRIP HAS 1/8" (3mm) DIA.
COUNTERSUNK HOLES EVERY 6" (152mm).
ALLOWS FOR FASTENING WITH COUNTERSUNK
SCREWS OR STANDARD POP-RIVETS. TOP STRIP
SNAPS IN PLACE CONCEALING ALL FASTENERS.

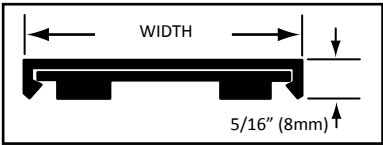


MODEL NO. T55-20-011
2-5/16" (59mm) WIDE

MODEL NO. T55-20-053
2" (51mm) WIDE

FURNISHED IN 6 ft (1830mm) LENGTHS

ONE PIECE SNAP-ON BREAKER STRIP

PROVIDES FAST INSTALLATION. SNAPS OVER
SHEET METAL RETURNS, PROVIDES A
SMOOTH CLEAN FINISH.

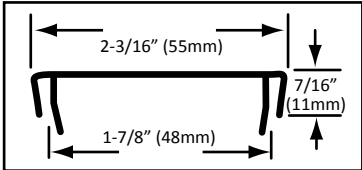


MODEL NO. T55-20-010
2-3/16" (55mm) WIDE
FURNISHED IN 6 ft (1830mm) LENGTHS




INSTRUCTIONS: Use this order form for all custom made gaskets.
Fill out the exact specifications and mail or fax it to us.
PLEASE NOTE: Custom made items are not returnable.

SELECTION CHART

REF.	QTY.	MODEL NO.	TYPE
1	_____	5270	Standard Magnetic
2	_____	1094	Standard Magnetic
3	_____	6449	Standard Magnetic
4	_____	10-516	Snap-in Magnetic
5	_____	5804	Standard Compression

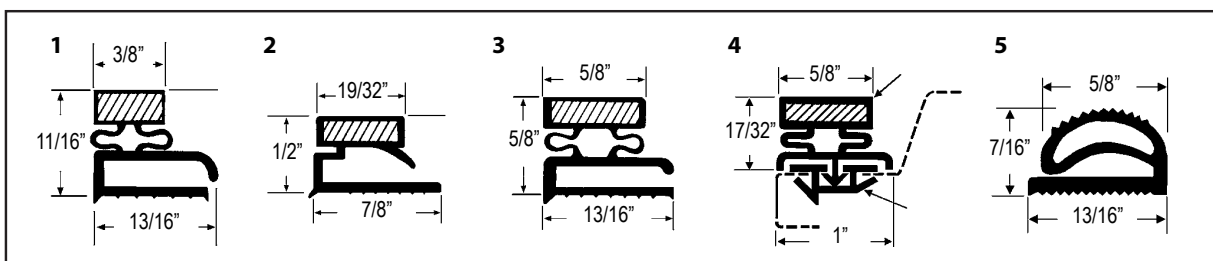

SPECIFY WIDTH _____

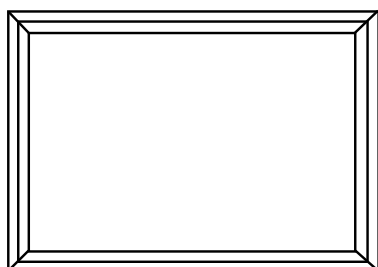


SPECIFY
HEIGHT _____


NUMBER
OF SIDES
3 4

MEASURING A GASKET FRAME:

STANDARD FRAMES



SNAP-IN FRAMES



PRE-INSTALLATION TIPS

- Allow replacement gasket to reach room temperature before unfolding.
- Carry gasket by its corners and avoid squeezing folds to prevent breaking the internal magnetic strip.
- Thoroughly clean the area of the door where the gasket attaches, as well as the cabinet perimeter that the gasket face contacts.

DISTORTIONS

- Our gaskets are made from a vinyl material which can become distorted from folding. The folding is necessary to allow a practical and economically sized shipping parcel.
- The vinyl material retains a "memory" of its original shape so any distortions or kinks will only be temporary.
- Return to the original shape can be accelerated greatly by the application of heat, for example:

Immerse gasket in 140°-185°F (60°-85°C) water for 15 to 30 minutes before installing.

Apply heat from an electric hair dryer or heat lamp before and after installation. Care must be taken not to overheat and stretch or melt the material when using this method.


COMPANY NAME _____
ADDRESS _____

PHONE NO. _____
P.O. NO. _____ DATE _____
AUTHORIZED BY _____

Component Hardware Group, Inc.

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701 • Tel. 800-526-3694 • 732-363-4700 • Fax 732-364-8110

WALK-IN REFRIGERATION

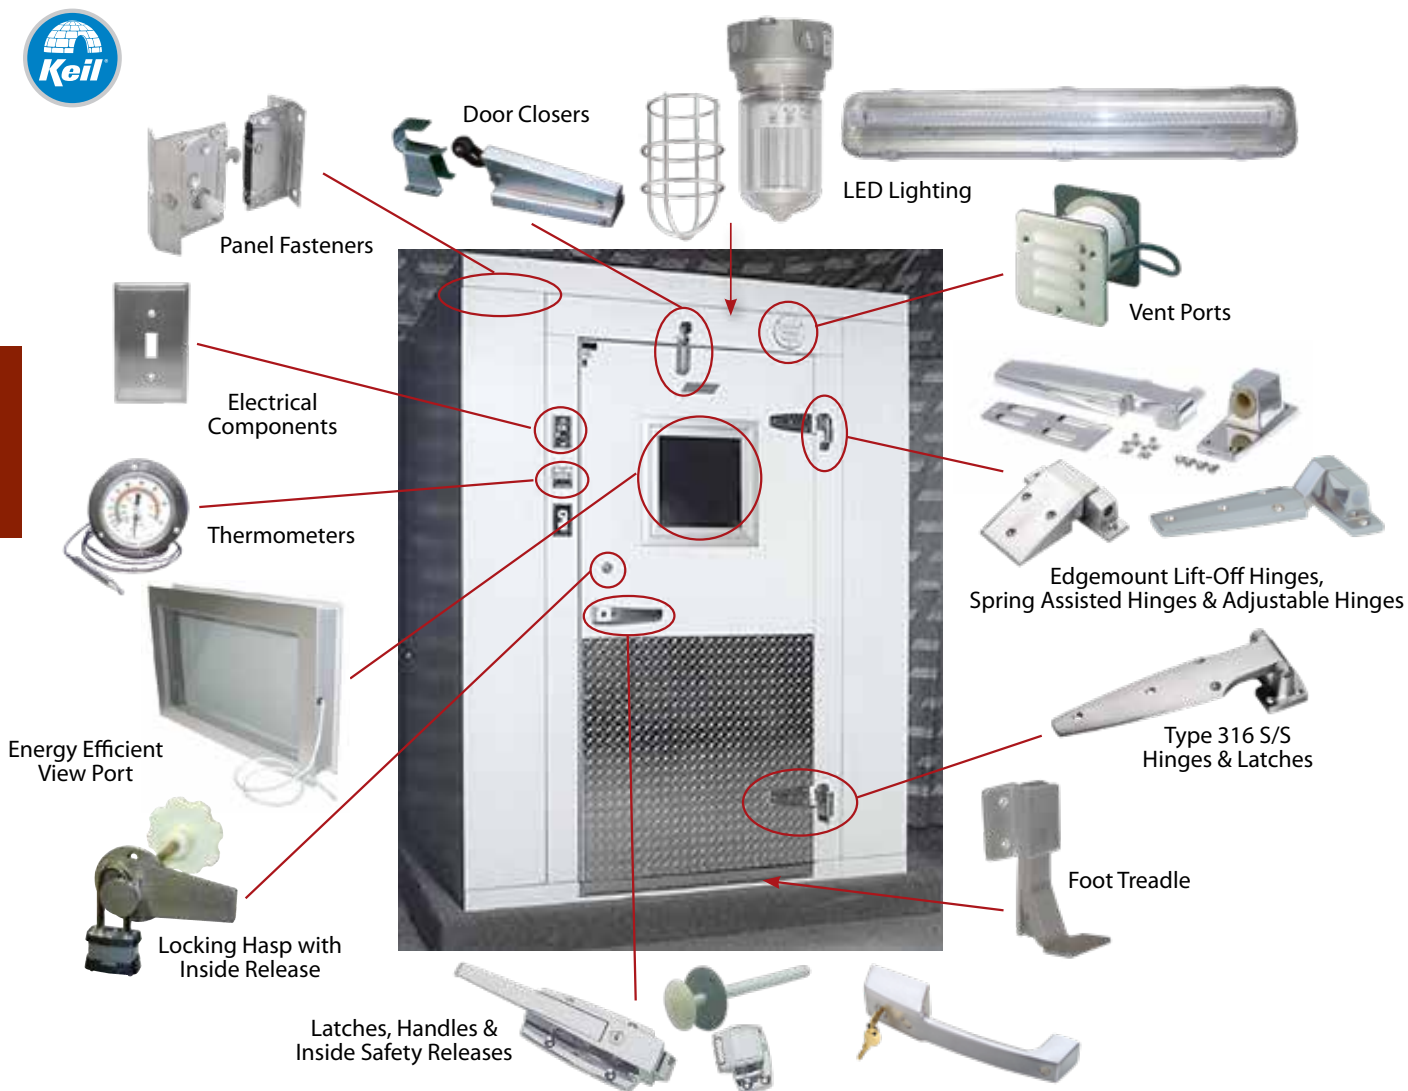

HINGE SELECTOR GUIDE & CHART

WALK-IN COOLER DOOR PULL HANDLES

WALK-IN COOLER DOOR SAFETY LATCHES

HEAVY-DUTY WALK-IN DOOR SAFETY LATCHES

INSIDE SAFETY RELEASES

SOLID STAINLESS STEEL INVESTMENT CAST HINGES

SOLID STAINLESS STEEL INVESTMENT CAST LATCHES

HARDWARE FOR OUTDOOR STRUCTURES

WALK-IN DOOR HINGES

POWER SPRING CONVERSION CARTRIDGE KIT

HEAVY-DUTY WALK-IN DOOR HINGES

HEAVY-DUTY NON-ADJUSTABLE WALK-IN DOOR HINGES

C67 HEAVY-DUTY ADJUSTABLE WALK-IN DOOR HINGES C80

C68 DOOR CLOSERS FOR WALK-IN REFRIGERATORS AND FREEZERS C81-C83

C69 THERMOMETERS C84

C70 PRESSURE RELIEF MPORT FOR SQUARE CUT OUT C85

C71-C72 PRESSURE RELIEF MPORT FOR ROUND CUT OUT C86

C73 WINDOW VIEW PORT C87

C74 FIP PANEL FASTENERS C88-C89

C75 SLAB FOAM PANEL FASTENERS C90-C91

C76 RIGID RAIL PANEL FASTENERS C92-C93

C77 ACCESSORIES FOR WALK-IN REFRIGERATION & FREEZERS C94

C78

C79

For Lighting Components, please see Lighting & Electrical on pages D95- D111

COMPONENT HARDWARE HINGE SELECTOR GUIDE

This hinge selector is designed to assist you in choosing the correct Component Hardware hinges for commercial reach-in and walk-in refrigeration, foodservice equipment, transportation, industrial and other applications. The Load Chart below shows our recommended allowable load per pair of hinges for each hinge group.

The data supplied in this chart applies for normal operating conditions under static loading by door weight only. Other factors, such as positive or negative pressure, high gasket compression, lateral stress, corrosive or abrasive environments, or structural movement are not taken into account. It is the ultimate responsibility of the user to determine the suitability and capacity required for their specific application.

HOW TO USE THIS CHART

1. Locate the weight of your door in the far left column, headed **DOOR WEIGHT**.
2. Find the width of your door along the bottom of the chart.
3. Where the weight line and width column intersect, find the recommended hinge group code (A, B, etc.)
4. Select your hinges from the Component Hardware® hinge groups below.

NOTE: If exact dimensions and weight for your door is not shown, use the next higher width and weight.


Hinge Groups A-C Shown in REACH-IN, Section E
Hinge Groups D-J Shown in WALK-IN, Section EE


COMPONENT HARDWARE HINGE GROUPS

GROUP	HINGE MODEL NUMBERS
A	R20-1010, R20-1020, R45-1010, R40-1010, R42-2840, R42-2841, R42-2842, R42-2843, R42-2842-BR
B	R42-2000, R42-2855, R56 SERIES
C	R50-2850, R50-2850-SPO, R50-2850-BLK, R50-2850-SS, R50-2850-NL, R50-2850-BA, R51-2000, R51-2000-RS, R51-2000-CS
D	W58, W59, W60, W61 SERIES, W99-6015-SS, W99-4100-SSRH, W99-4100-SSLH, W55-1000, W56-1000
E	N/A
F	W99-2001, W99-2001-GE, W99-2063, W99-2063-G6, W77-1625
G	N/A
H	N/A
J	N/A

HOW TO DETERMINE OFFSET FOR HINGES AND LATCHES

With door closed, measure the distance from the jamb to the door face.

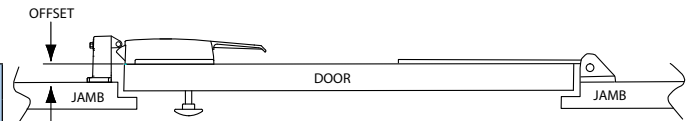

DOOR WEIGHTS		LOAD CHART																					
kg.	lb.																						
226.8	500	D	D	E	F	F	F	G	G	G	G	H	H	H	H	H	H	H	J	J	J	J	
217.7	480	D	D	E	F	F	F	G	G	G	G	H	H	H	H	H	H	H	J	J	J	J	
208.6	460	D	D	E	E	F	F	F	G	G	G	G	H	H	H	H	H	H	H	J	J	J	
199.5	440	D	D	D	E	F	F	F	G	G	G	G	G	H	H	H	H	H	H	H	J	J	
190.5	420	D	D	D	E	F	F	F	F	G	G	G	G	H	H	H	H	H	H	H	H	J	
181.4	400	D	D	D	E	E	F	F	F	G	G	G	G	G	H	H	H	H	H	H	H	H	
172.4	380	D	D	D	D	E	F	F	F	F	G	G	G	G	G	H	H	H	H	H	H	H	
163.3	360	D	D	D	D	E	E	F	F	F	G	G	G	G	G	G	H	H	H	H	H	H	
154.2	340	D	D	D	D	E	E	F	F	F	F	G	G	G	G	G	G	H	H	H	H	H	
145.2	320	C	D	D	D	D	E	E	F	F	F	F	G	G	G	G	G	G	H	H	H	H	
136.1	300	C	D	D	D	D	D	E	E	F	F	F	F	F	G	G	G	G	G	G	G	H	
127.0	280	C	D	D	D	D	D	E	E	F	F	F	F	F	G	G	G	G	G	G	G	H	
117.9	260	C	C	D	D	D	D	D	E	E	F	F	F	F	F	G	G	G	G	G	G	G	
108.9	240	C	C	D	D	D	D	D	D	E	E	F	F	F	F	F	F	G	G	G	G	G	
99.8	220	C	C	C	D	D	D	D	D	D	E	E	E	F	F	F	F	F	F	G	G	G	
90.7	200	B	C	C	D	D	D	D	D	D	D	E	E	E	F	F	F	F	F	F	F	G	
81.7	180	B	C	C	C	D	D	D	D	D	D	D	E	E	E	F	F	F	F	F	F	F	
72.6	160	B	B	C	C	C	D	D	D	D	D	D	D	D	E	E	E	E	F	F	F	F	
63.5	140	B	B	C	C	C	C	D	D	D	D	D	D	D	D	D	D	E	E	E	E	F	
54.4	120	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	E	E	
45.4	100	A	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	
36.3	80	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	
27.2	60	A	A	A	A	B	B	B	B	B	B	C	C	C	C	C	C	C	C	C	D	D	
18.1	40	A	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	C	C	C	C	
9.0	20	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	
DOOR WIDTH	in.	12	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	
	cm.	30.5	38.1	45.7	53.3	61.0	68.6	76.2	83.8	91.4	99.1	106.7	114.3	121.9	129.5	137.2	144.8	152.4	160.0	167.6	175.3	182.9	


Walk-In Cooler Door Pull Handles



W29 SERIES DOOR PULL HANDLES

- Heavy-duty high pressure zinc die-casting
- Satin chrome finish will not show fingerprints
- Polished chrome finish available
- Ergonomic design offers comfortable and easy door opening
- Non-handed-reversible feature for right or left hand swinging doors
- Concealed tamper-resistant mounting
- Ideal for all magnetic framed doors

MODEL NO.	DESCRIPTION	FINISH
W29-1000X	Without Cylinder	Satin Chrome
W29-2000 (not shown)	Without Cylinder	Polished Chrome

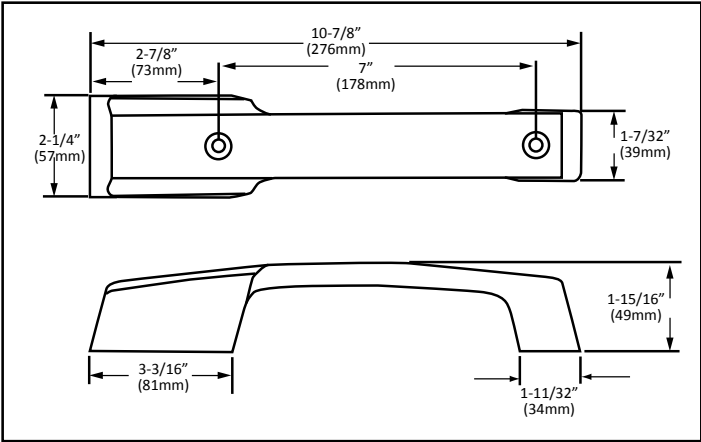


W30 SERIES HEAVY DUTY DOOR PULL

- Non-handed-reversible design fits right or left hand swinging doors
- Heavy-duty high pressure zinc die-cast construction
- Satin chrome finish will not show fingerprints
- Available in polished or satin chrome finishes
- Ergonomic design offers comfortable and easy door opening
- Concealed tamper-resistant mounting
- Ideal for all magnetic framed doors
- Locking models include inside safety release and unique padlock feature
- Safety release sized for 4" thick panel (other sizes available upon request)
- Styling coordinated with Component Hardware W59 Series door hinges

MODEL NO.	DESCRIPTION	FINISH
W30-1000-L*	With Lock	Satin Chrome
W30-2000-L*	With Lock	Polished Chrome



*NOTE: Non-Stock Item – 504 PC MOQ

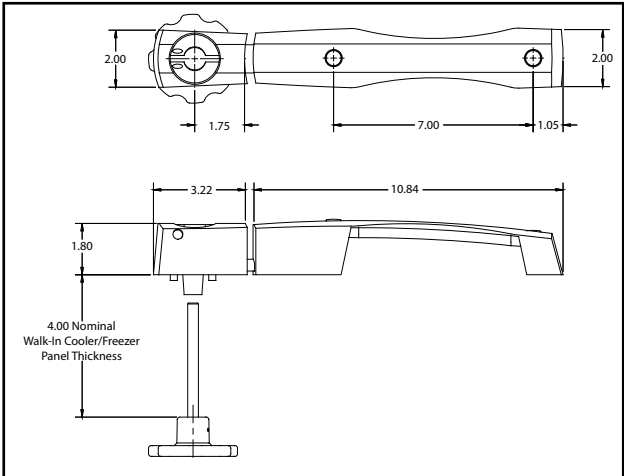

W31 SERIES MAGNETIC DOOR BREAKER-ACTION HANDLE

- For Refrigeration Doors with Magnetic Gaskets
 - Aluminum Sand Cast Construction
 - Breaker Action Promotes Easy Door Opening
 - Satin Finish
 - Accepts Padlock
 - Complete with Inside Safety Release
 - For Doors with 1-3/8" (35mm) Offset
 - Inside Release Designed for 4-5/8" (117mm) Door Thickness*
- * Other lengths available on application

MODEL NO. W31-1000X

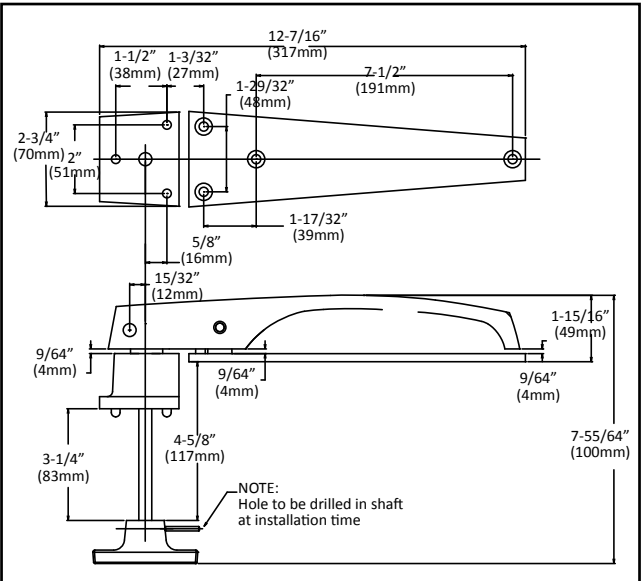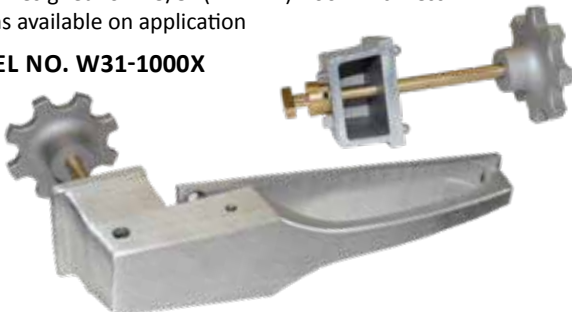


REPLACES* STANDARD KEIL (#2820 & 9180) AND DENT (D-83)
WITH COMPONENT HARDWARE QUALITY HARDWARE



W19 SERIES SAFETY LATCHES DESIGNED ESPECIALLY FOR WALK-IN REFRIGERATORS AND FREEZERS

- AVAILABLE IN POLISHED CHROME OR SATIN CHROME FINISH

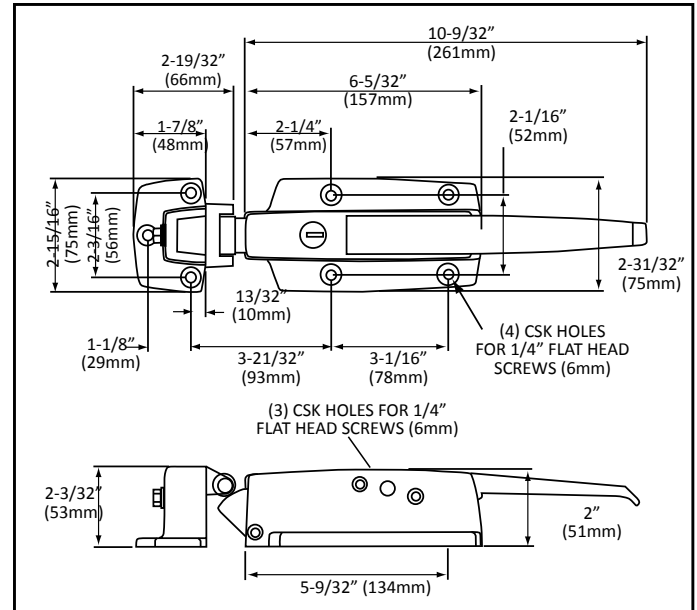

HEAVY- DUTY CONSTRUCTION... to provide the impact resistance required in heavy traffic areas. The latch body is constructed of reinforced die cast Zamak and furnished with a solid handle. All inner working parts and back plate are manufactured of solid stainless steel, unlike competitors models that can rust and leave unsightly stains on doors.

TAMPER PROOF DESIGN... eliminates pilferage of costly food stocks. Bolt cannot be retracted from the outside when latch is cylinder locked or padlocked. Yet with safety inside release mechanism occupants can safely exit even if latch is locked or padlocked.

FRICTION FREE OPERATION... provided by utilizing roller bolt retraction combined with roller strike action. Eliminates wear and allows doors to close smoothly and easily without slamming, while offering superb gasket compression.


EASY LIFT HANDLE... user friendly requires minimal hand pressure to completely retract bolt from strike. Low 1-1/2" (38mm) handle rise eliminates tugging and wrist twisting.

EASILY ADJUSTED STRIKE ASSEMBLY... offers variable offset adjustment permitting field adjustment for door gasket wear.


MODEL NO.	DESCRIPTION	FINISH	OFFSET
W19-1000	No Cylinder Lock	Polished Chrome	
W19-1000-C	With Cylinder Lock	Polished Chrome	-1/8" TO 3/8"
W19-1000-SN	No Cylinder Lock	Satin Chrome	(-3mm TO 10mm)
W19-1000-C-SN	With Cylinder Lock	Satin Chrome	
W19-1500	No Cylinder Lock	Polished Chrome	3/4" TO 1-5/8"
W19-1500-C	With Cylinder Lock	Polished Chrome	(19mm TO 41mm)
W19-2000	No Cylinder Lock	Polished Chrome	1-5/8" TO 2-1/2"
W19-2000-C	With Cylinder Lock	Polished Chrome	(41mm TO 64mm)

FOOT TREADLE

For Safe & Convenient Hands-Free Door Operation

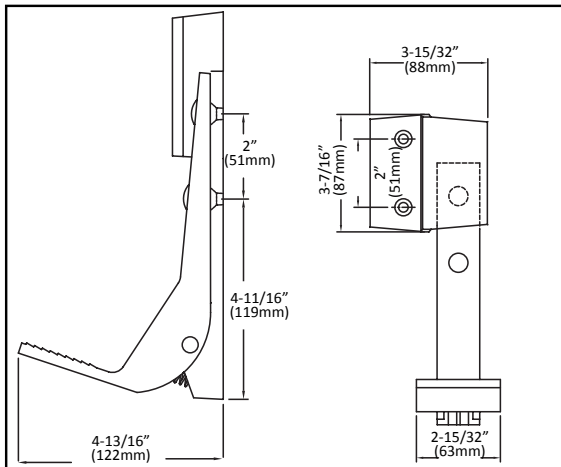

REPLACES* STANDARD KEIL (#2890 & 9183) AND DENT (D-82) WITH COMPONENT HARDWARE QUALITY HARDWARE

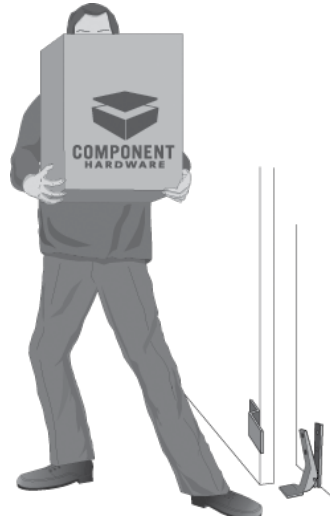

- Non-skid pedal surface
- Stainless Steel pin and low friction bearings
- Reversible for right or left hand door swing
- Length-7-3/4" (197mm)
- Material-Aluminum
- Brushed Aluminum Finish
- Offset-Flush
- Screw Holes- 1/4" (6mm) Hole, 82° Countersunk



MODEL NO.
W50-1000

Heavy-Duty Walk-In Door Safety Latches



W38 SERIES SAFETY LATCHES DESIGNED ESPECIALLY FOR WALK-IN REFRIGERATORS AND FREEZERS



- AVAILABLE IN POLISHED CHROME OR SATIN CHROME FINISH



MODEL NO.	DESCRIPTION	FINISH	OFFSET
W38-1000	No Cylinder Lock	Polished Chrome	-1/8" TO 3/8" (-3mm TO 10mm)
W38-1000-C	With Cylinder Lock	Polished Chrome	
W38-1000-SN	No Cylinder Lock	Satin Chrome	
W38-1500	No Cylinder Lock	Polished Chrome	3/4" TO 1-5/8" (19mm TO 41mm)
W38-1500-C	With Cylinder Lock	Polished Chrome	
W38-1500-SN	No Cylinder Lock	Satin Chrome	
W38-2000	No Cylinder Lock	Polished Chrome	1-5/8" TO 2-1/2" (41mm TO 64mm)
W38-2000-C	With Cylinder Lock	Polished Chrome	

SUPER HEAVY-DUTY CONSTRUCTION... and large body profile latch is designed to withstand the most rigorous of commercial kitchen or cold room environments. Latch handle is produced of lifetime **SOLID FORGED BRASS** construction. All inner working parts and back plate are manufactured of solid stainless steel which provide a rugged, smooth and rust-free operation.

- EASY LIFT HANDLE
- HEAVY- DUTY CONSTRUCTION
- FRICTION-FREE OPERATION
- EASILY ADJUSTED STRIKE ASSEMBLY
- TAMPER PROOF DESIGN

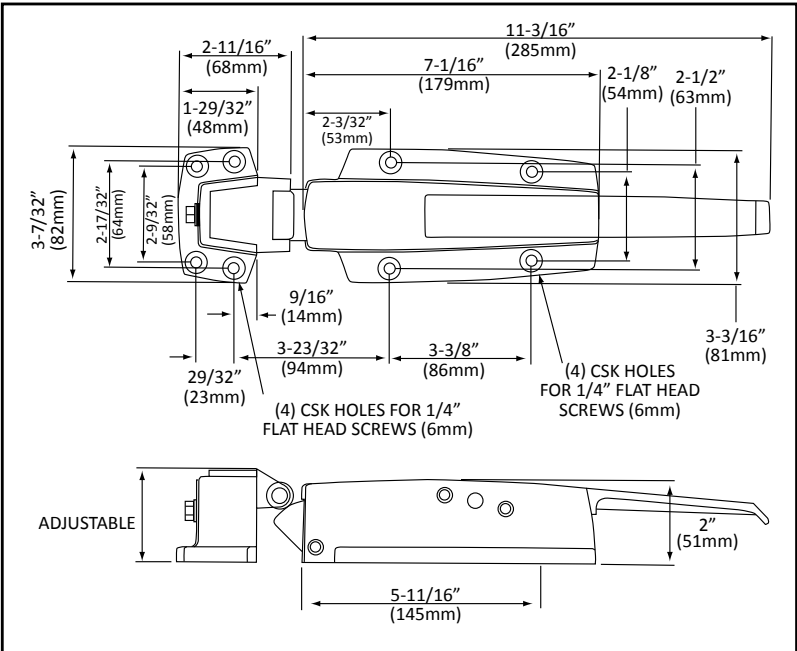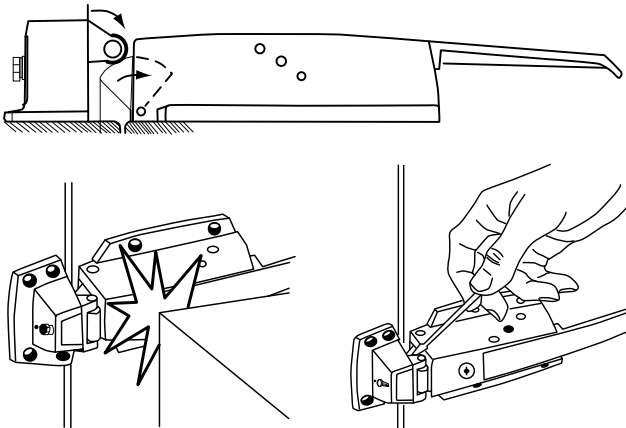



W28 SERIES INSIDE SAFETY RELEASES FOR RECESSED MOUNT

- **surface mount and flush mount styles** are available
- **Glow-in-the-dark knob** meets all industry safety standards
- Durable **solid fiberglass reinforced polyester** pushrod provides years of smooth, safe, frost-free operation and eliminates conductivity of cold air
- Short Stroke engineering provides **immediate inside release** even if latch is cylinder locked, padlocked or both
- **Recessed design** protects knob from exposure to traffic of heavy crates, hand trucks and loading vehicles
- **ALL standard door thicknesses** are available

SPECIFICATIONS

KNOB: GLOW-IN-THE-DARK SAFETY GREEN THERMOPLASTIC

FLANGE: GREY THERMOPLASTIC

PUSH ROD: NON-CONDUCTIVE FIBERGLASS REINFORCED POLYESTER


NOTE: INSIDE RELEASES MUST BE ORDERED SEPARATELY

RECESSED MOUNT


MODEL NO.	DOOR THICKNESS
W28-3400X	4" (102mm)
W28-3800X	8" (203mm)



ADDITIONAL ROD SIZES FOR VARYING DOOR THICKNESSES AVAILABLE ON APPLICATION

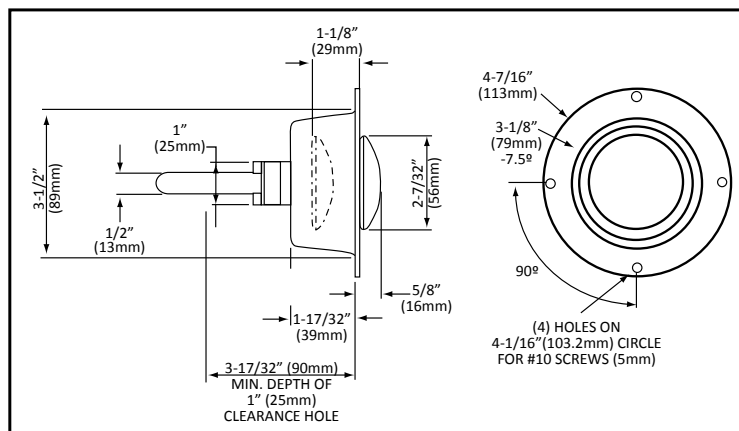

W28 SERIES INSIDE SAFETY RELEASES FOR SURFACE MOUNT

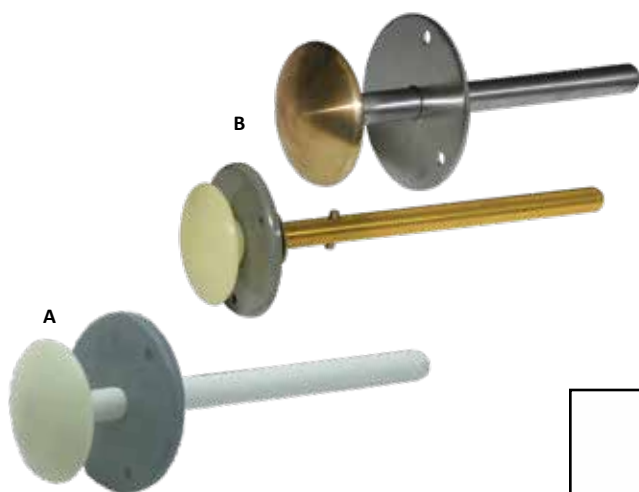

REF. A


SURFACE MOUNT

MODEL NO.	DOOR THICKNESS
W28-2325X	3-1/4" (83mm)
W28-2400X	4" (102mm)
W28-2600X	6" (152mm)
W28-2800X	8" (203mm)

REF. B

STAINLESS STEEL INSIDE RELEASES AND BRASS RODS (SPECIAL ORDER)

MODEL NO.	DESCRIPTION
W28-2400-SSX	S/S Rod For 4" (102mm) Wall With Brass Knob
W28-2300-SSX	S/S Rod For 3" (76mm) Wall With Brass Knob
W28-2605	Brass Rod For 6" (152mm) Wall

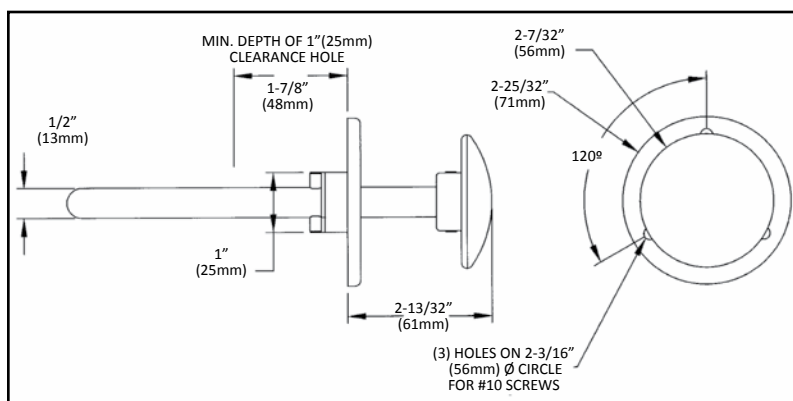



PANIC BAR W/INSIDE SAFETY RELEASE

MODEL NO. W28-1000

FOR 3" DOOR

MODEL NO. W28-1200

FOR 4" DOOR



- Sturdy aluminum construction
- Glow-in-the-dark reflective strip
- For use with Component Hardware W19, W38 and W99 Series refrigeration safety latches
- Glow-in-the-dark reflective strip
- Reversible for left and right hand door applications
- Sturdy aluminum construction
- Supplied with stainless steel push rod


PADLOCK HASP WITH INSIDE SAFETY RELEASE

MODEL NO. W29-5000-4X

- For 4" (102mm) wall and flush door
- External parts are 300 series stainless steel with satin finish
- Plate can be locked in lock/open as well as locked/closed position
- Concealed mounting holes utilize #10 or #12 flat head screw
- Plastic glow in the dark inside release knob on solid brass rod




Simple padlocking hasp secures any walk-in cooler or freezer door.

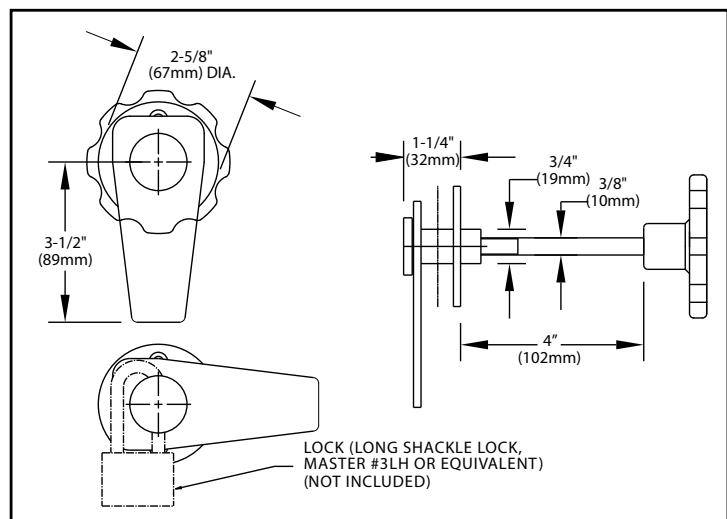




W99 SERIES INVESTMENT CAST HINGES

REF. A
W99-6015-SS

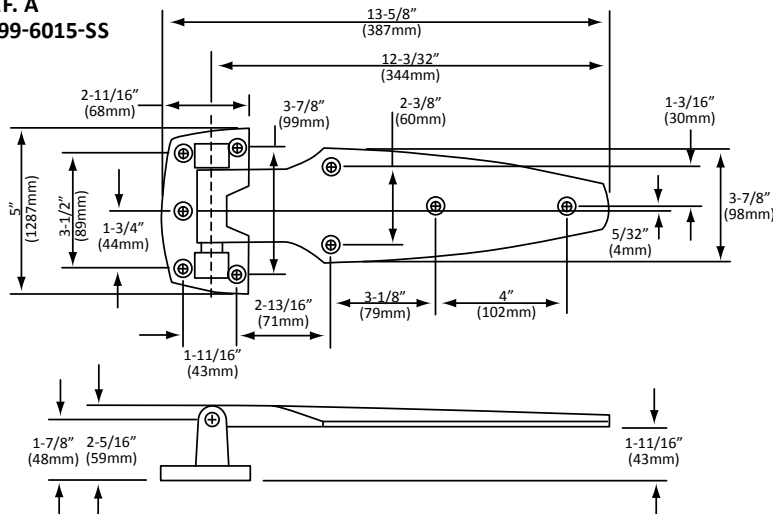

- The **ONLY ALL STAINLESS HINGE** available in today's market
- Field Reversible
- Solid stainless steel construction throughout
- Ideal for highly corrosive and humid environments
- Ideal for marine applications, outside cold rooms and commercial refrigerated truck bodies
- Rugged heavy-duty lifetime construction
- Tamper-proof design

REF. B
W99-4100

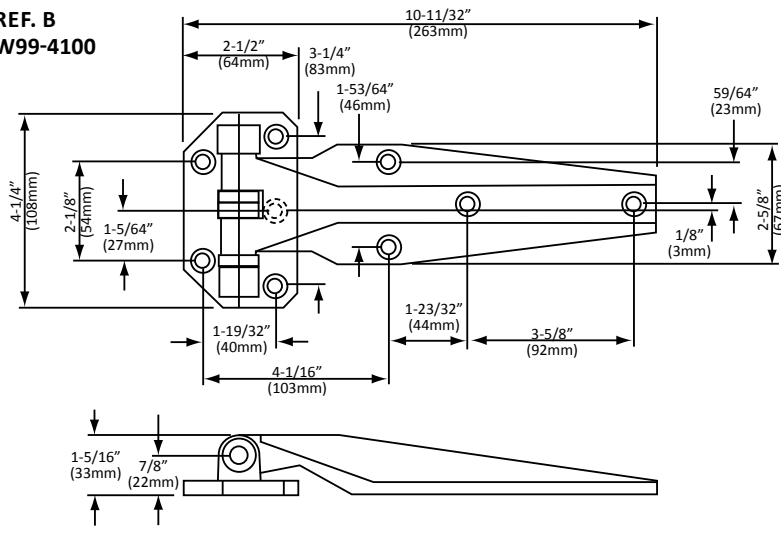

MODEL NO.	DESCRIPTION
W99-6015-SS	1-5/8" (41mm) Offset
W99-4100-SSRH	Right Hand Flush
W99-4100-SSLH	Left Hand Flush


W99-4100 REPLACES DENT (D1P) WITH COMPONENT HARDWARE QUALITY HARDWARE




W99 SERIES INVESTMENT CAST SAFETY LATCHES

- The **only ALL Stainless latch** available in today's market
- Solid stainless steel construction throughout
- Ideal for highly corrosive and humid environments
- Ideal for marine applications, outside cold rooms and commercial refrigerated truck bodies
- Rugged heavy-duty lifetime construction
- Tamper-proof design
- Padlock feature on all latches for maximum security
- Cylinder lock model also available

MODEL NO.	DESCRIPTION
W99-3800-SS	Flush To 3/8" Offset
W99-3800-SS-C	Latch With Lock
W99-3815-SS	3/4" TO 1-5/8" Offset
W99-3815-SS-C	Latch With Lock
W99-3820-SS	1-5/8" To 2-1/2" Offset

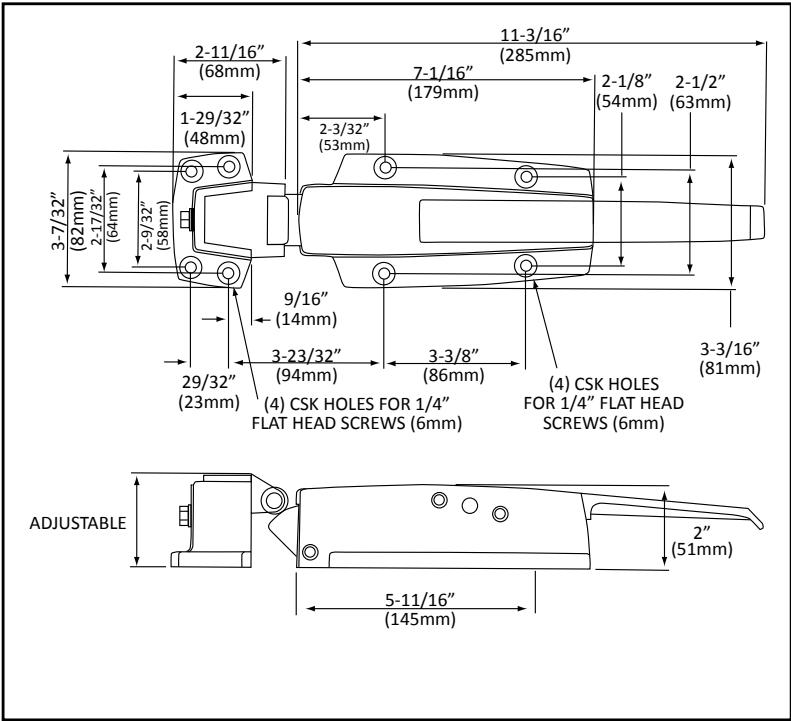

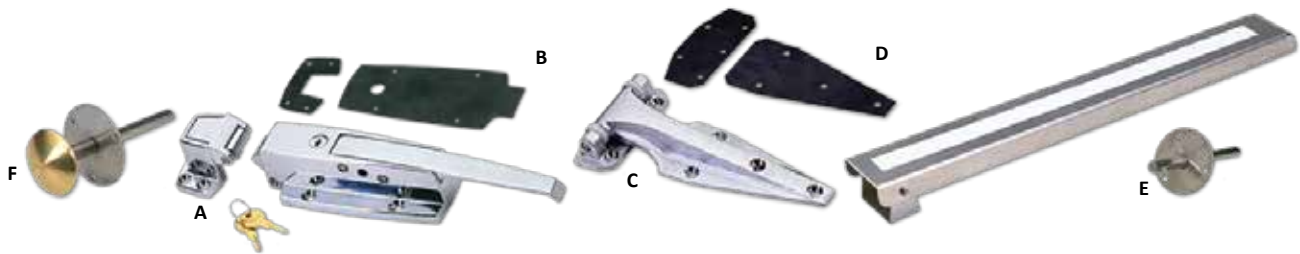

SPECIALTY HARDWARE FOR OUTDOOR APPLICATION

- IDEAL FOR HIGHLY CORROSIVE AND HUMID ENVIRONMENTS • IDEAL FOR MARINE APPLICATIONS, OUTSIDE COLD ROOMS AND COMMERCIAL REFRIGERATED TRUCK BODIES • RUGGED HEAVY-DUTY LIFETIME CONSTRUCTION • TAMPER-PROOF DESIGNS

REF.	MODEL NO.	DESCRIPTION
A	W38-1000-C	Latch And Strike
B	W99-0100-L	Latch Gasket
C	W99-2001	Hinge, Chrome Plated Brass, Flush w/Bronze Bushings
Not Shown	W99-2063	Hinge, Chrome Plated Brass, 5/8" Offset w/Bronze Bushings
D	W99-0100-H	Hinge Gasket
E	W28-1000	Panic Bar W/Inside Release
F	W28-2300-SSX	Stainless Steel Inside Release For 3" (76 mm) Door Thickness

ALSO AVAILABLE AS COMPLETE ASSEMBLIES:

W38-1000-C-GE	Walk-In Latch Kit Includes Flush Mount Polished Chrome Latch w/Cylinder Lock, Gasket Set & S/S Inside Release for 3" door thickness
W38-1600LSSGE	Walk-In Latch Kit Includes Flush Mount S/S Latch w/Cylinder Lock, Gasket Set & Inside Release
W38-6000-C-GE	Walk-In Latch Kit Includes Flush Mount Polished Chrome Latch w/Cylinder Lock, Gasket Set & Panic Bar Inside Release
W99-2001-GE	Hinge Kit Chrome Plated Brass, Flush Mount, Gaskets Included w/Bronze Bushings
W99-2063-GE	Hinge Kit Chrome Plated Brass, 5/8" Offset, Includes Gaskets w/Bronze Bushings

W38 SERIES HEAVY-DUTY WALK-IN DOOR SAFETY LATCHES

- Available in polished chrome or satin chrome finish • Super heavy-duty construction and large body profile latch designed to withstand the most rigorous conditions • Handle is solid forged brass, inner working parts and back plate are solid stainless steel for smooth and rust-free operation

W99 SERIES HEAVY-DUTY HINGE

- Available in chrome plated brass • Available in flush or 5/8" (16mm) offset • Heavy-duty construction to withstand rigorous conditions • Models available with OILITE® bronze bushings for added strength & durability

W28 SERIES STAINLESS STEEL INSIDE RELEASE

W28-1000 PANIC BAR W/INSIDE RELEASE

- Sturdy aluminum construction • Glow-in-the-dark reflective strip

W28-2300-SSX STAINLESS STEEL INSIDE RELEASE

- For 3" (76 mm) door thickness • Additional sizes for varying door thicknesses available on application



W60 SERIES LIFT-OFF HINGE WITH CAM RISE ACTION

LONG STRAP POLISHED CHROME FINISH

MODEL NO.	OFFSET
W60-1000	Flush
W60-1012	1/8" (3mm)
W60-1025	1/4" (6mm)
W60-1037	3/8" (10mm)
W60-1112	1-1/8" (29mm)
W60-1125	1-1/4" (32mm)
W60-1137	1-3/8" (35mm)
W60-1150	1-1/2" (38mm)
W60-1162	1-5/8" (41mm)
W60-1175	1-3/4" (45mm)
W60-1187	1-7/8" (48mm)
W60-1200	2" (51mm)

REPLACES STANDARD KEIL #2860
WITH COMPONENT HARDWARE QUALITY HARDWARE

LONG STRAP SATIN CHROME FINISH

W60-2000	Flush
W60-2025	1/4" (6mm)
W60-2112	1-1/8" (29mm)
W60-2137	1-3/8" (35mm)

SHORT STRAP POLISHED CHROME FINISH

W60-1000-S	Flush
W60-1012-S	1/8" (3mm)
W60-1025-S	1/4" (6mm)
W60-1037-S	3/8" (10mm)

COORDINATED STYLING

Design coordinated with clean, unobtrusive lines to aesthetically complement the **W19 AND W38 SERIES EASY ACTION SAFETY LATCH** or other contemporary breaker hardware, latches or pulls.

REVERSIBLE

Can be utilized for any right or left hand door application. Conversion is easily accomplished without tools.

UNIQUE CAM ACTION

Contains self-lubricating nylon and Delrin cam rise components to provide **GLIDE-ACTION** door operation. These components reduce door sweep gasket wear regardless of floor irregularity and provide constant overclose pressure against the door gasket assuring a positive seal. A **HOLD-OPEN** feature is built into the cam allowing the door to remain open at 140°. The door will automatically return to a closed position if opened less than 140°.

LIFT-OFF CAPABILITY

Doors can be removed quickly without tools or hinge disassembly. This allows for knockdown shipment and eliminates costly on-site installation and service time.

DURABLE

Constructed of die-cast Zamak with built-in structural reinforcing ribs for extraordinary strength and years of trouble-free operation.

ALL TYPE CONSTRUCTION



This series is designed to meet the universal requirements of all types of cooler construction especially foam.

UNIVERSAL MOUNTING HOLES

Allows REPLACEMENT* with all competitors models without redrilling or reinforcing.

SPECIFICATIONS

OFFSET: Flush thru 2" (51mm)
FINISH: Polished Chrome or Satin Chrome Finish
MATERIAL: High pressure die cast Zamak
MOUNTING HOLES: Drilled and countersunk for #14 screws (6mm)

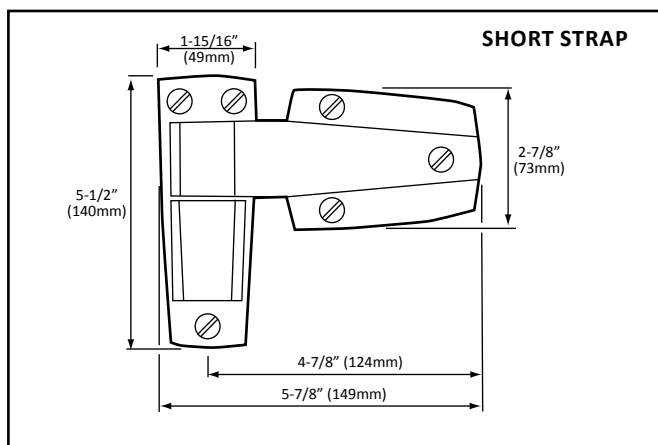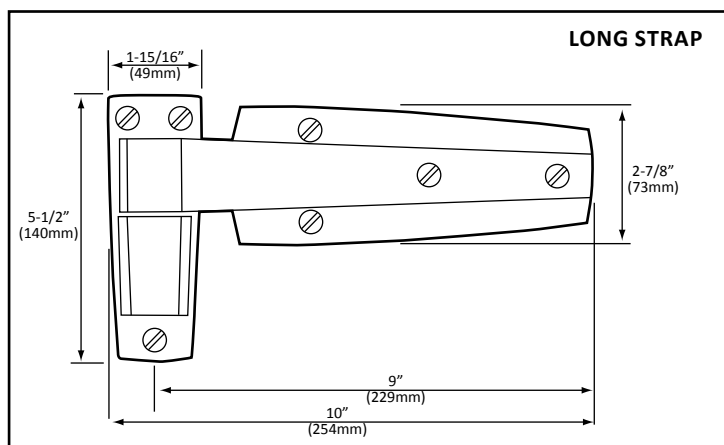

EASY INSTALLATION



POWER SPRING CONVERSION CARTRIDGE KIT

MODEL NO. W62-0001 Polished Chrome Finish



MODEL NO. W62-2001 Satin Chrome Finish

- ACCELERATES DOOR CLOSING
- INCREASES DOOR PRESSURE
- EASY INSTALLATION
- REDUCED INVENTORY

The energy saving power spring conversion cartridge is designed for easy installation into the W60 Series Lift-off Hinge. It provides increased door speed closure and maintains constant gasket pressure to eliminate refrigerated air loss. Unlike competitor's spring hinges, this optional cartridge kit can be simply added at any time to the W60 Series Lift-off Hinge eliminating costly inventories.

The cartridge kit contains a heavy duty chrome vanadium spring to assure years of trouble-free operation. The assembly may be used for either left or right hand doors, permitting reduced inventory for both hinges and conversion kits. When required, the cartridge may be easily disengaged for door removal.

Note: This conversion cartridge eliminates the lift-off capability of the W60 SERIES LIFT-OFF HINGE. REPLACES STANDARD-KEIL #2862 WITH COMPONENT HARDWARE QUALITY HARDWARE

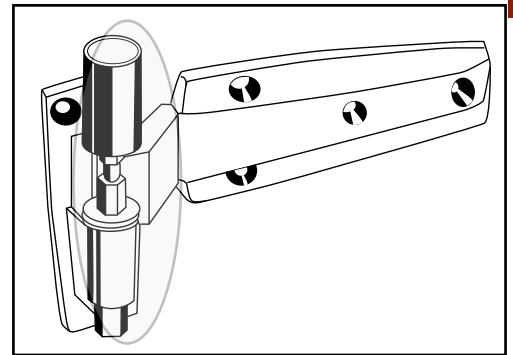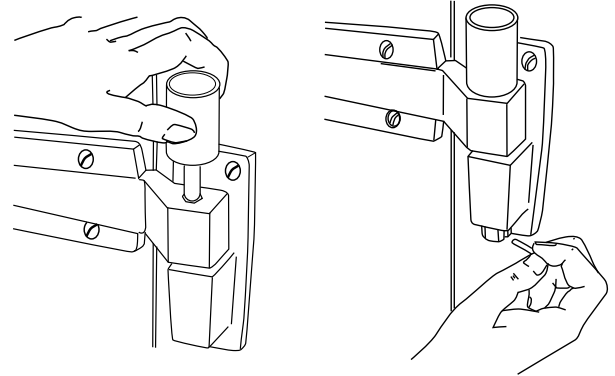

HEAVY-DUTY CAM-RISE HINGE



MODEL NO. W77-1375 1-3/8" Offset

- For cold storage, supermarket and other heavy-duty walk-in applications
- Reversible for left or right-hand doors without disassembly
- Self-closing cam-rise action
- Heavy-duty zinc-plated steel strap with satin finish
- Black epoxy-coated die cast flange
- Drilled for 3/8" mounting hardware
- Other offsets available upon application

Heavy Duty Walk-In Door Hinges



C

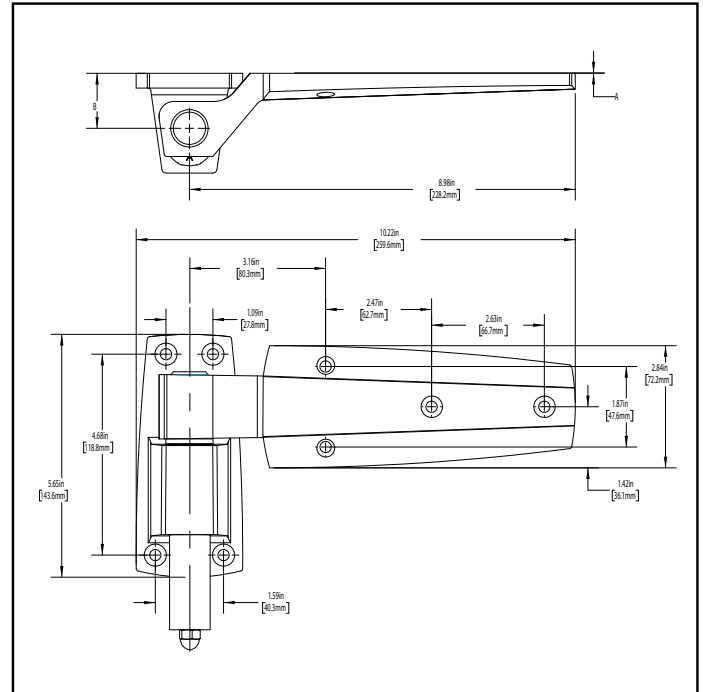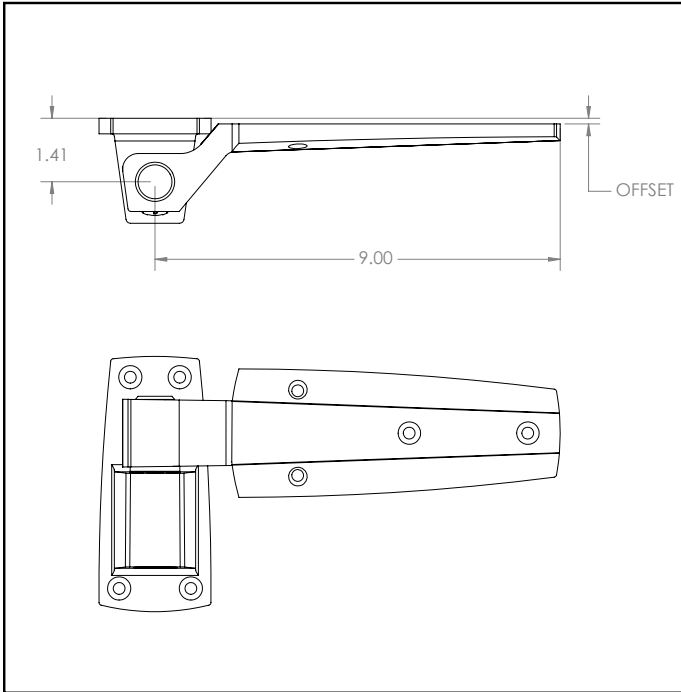

W61 SERIES - HINGE HEAVY DUTY WALK-IN COOLER/FREEZER

FLEXIBLE DESIGN

- Easily converted from left to right hand swing without tools
- Lift-off capability - doors can be removed quickly without tools or hinge disassembly
- Available in polished chrome or satin chrome finish
- Universal mounting holes allow replacement with all competitors' models without redrilling
- Styling coordinated with Component Hardware W30 Series door pulls

UNIQUE CAM ACTION

- Self-lubricating nylon and Delrin cam rise reduce door sweep gasket wear
- Provides constant overclose pressure against door gasket to ensure a positive seal
- Built-in hold open feature allows door to remain open at 140°
- Door automatically returns to a closed position if opened less than 140°

WITHOUT BUILT-IN SPRING		WITH BUILT-IN SPRING		A	B
MODEL NO. POLISHED CHROME	MODEL NO. SATIN CHROME	MODEL NO. POLISHED CHROME	MODEL NO. SATIN CHROME		
W61-1000	W61-2000	W61-3000	W61-4000	Flush	1.28" (32.5mm)
W61-1012	W61-2012	W61-3012	W61-4012	0.12" (3.1mm)	1.41" (35.8mm)
W61-1025	W61-2025	W61-3025	W61-4025	0.25" (6.4mm)	1.53" (38.9mm)
W61-1037	W61-2037	W61-3037	W61-4037	0.38" (9.7mm)	1.66" (42.2mm)
W61-1112	W61-2112	W61-3112	W61-4112	1.12" (28.5mm)	1.28" (32.5mm)
W61-1125	W61-2125	W61-3125	W61-4125	1.25" (31.8mm)	1.41" (35.8mm)
W61-1137	W61-2137	W61-3137	W61-4137	1.38" (35.1mm)	1.53" (38.9mm)
W61-1150	W61-2150	W61-3150	W61-4150	1.5" (38.1mm)	1.66" (42.2mm)
W61-1162	W61-2162	W61-3162	W61-4162	1.62" (41.2mm)	1.28" (32.5mm)
W61-1175	W61-2175	W61-3175	W61-4175	1.75" (44.5mm)	1.41" (35.8mm)
W61-1187	W61-2187	W61-3187	W61-4187	1.87" (47.5mm)	1.53" (38.9mm)
W61-1200	W61-2200	W61-3200	W61-4200	2.0" (51mm)	1.66" (42.2mm)

Heavy Duty Non-Adjustable Walk-In Door Hinges



Patent D725,989 S

FLEXIBLE DESIGN

- Spring assist feature provides additional closing force for use on heavier doors
- Easily converted from left to right hand swing without tools
- Lift-off capability - doors can be removed quickly without tools or hinge disassembly
- Available in Polished Chrome or Satin Chrome finish or black covers
- Removable hinge cover conceals mounting holes for clean appearance
- Hinge covers may be personalized with custom colors, logos, etc. for a distinctive look
- Universal mounting holes allow replacement with all competitors' models without redrilling
- Styling coordinated with Component Hardware W30 Series door pulls


UNIQUE CAM ACTION

- Self-lubricating nylon and Delrin cam rise reduce door sweep gasket wear
- Provides constant overclose pressure against door gasket to ensure a positive seal
- Built-in hold open feature allows door to remain open at 140°
- Door automatically returns to a closed position if opened less than 140°


W58 SERIES - NON-ADJUSTABLE HINGE HEAVY DUTY WALK-IN COOLER/FREEZER

WITHOUT SPRING		WITH SPRING		A	B
MODEL NO. POLISHED CHROME	MODEL NO. SATIN CHROME	MODEL NO. POLISHED CHROME	MODEL NO. SATIN CHROME		
W58-1000	W58-2000	W58-3000	W58-4000	Flush	1.28" (32.5mm)
W58-1012	W58-2012	W58-3012	W58-4012	0.12" (3.1mm)	1.41" (35.8mm)
W58-1025	W58-2025	W58-3025	W58-4025	0.25" (6.4mm)	1.53" (38.9mm)
W58-1037	W58-2037	W58-3037	W58-4037	0.38" (9.7mm)	1.66" (42.2mm)
W58-1112	W58-2112	W58-3112	W58-4112	1.12" (28.5mm)	1.28" (32.5mm)
W58-1125	W58-2125	W58-3125	W58-4125	1.25" (31.8mm)	1.41" (35.8mm)
W58-1137	W58-2137	W58-3137	W58-4137	1.38" (35.1mm)	1.53" (38.9mm)
W58-1150	W58-2150	W58-3150	W58-4150	1.5" (38.1mm)	1.66" (42.2mm)
W58-1162	W58-2162	W58-3162	W58-4162	1.62" (41.2mm)	1.28" (32.5mm)
W58-1175	W58-2175	W58-3175	W58-4175	1.75" (44.5mm)	1.41" (35.8mm)
W58-1187	W58-2187	W58-3187	W58-4187	1.87" (47.5mm)	1.53" (38.9mm)
W58-1200	W58-2200	W58-3200	W58-4200	2.0" (51mm)	1.66" (42.2mm)

Note: Standard hinge cover matches hinge. For black plastic cover, add "-CBLK" to model number.

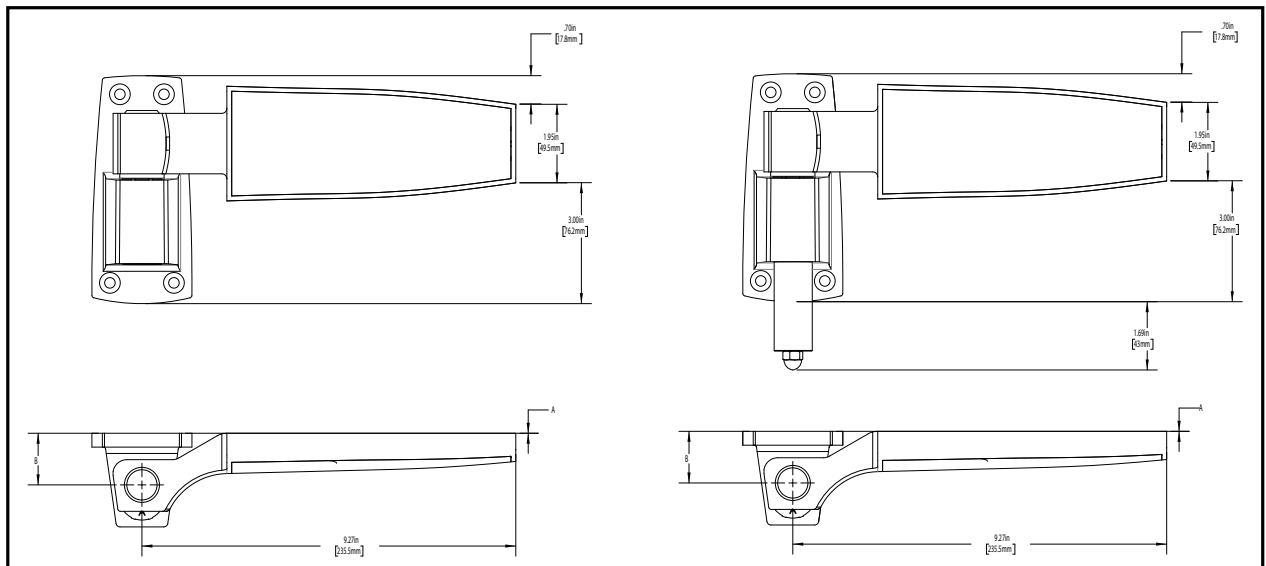

Heavy Duty Adjustable Walk-In Door Hinges

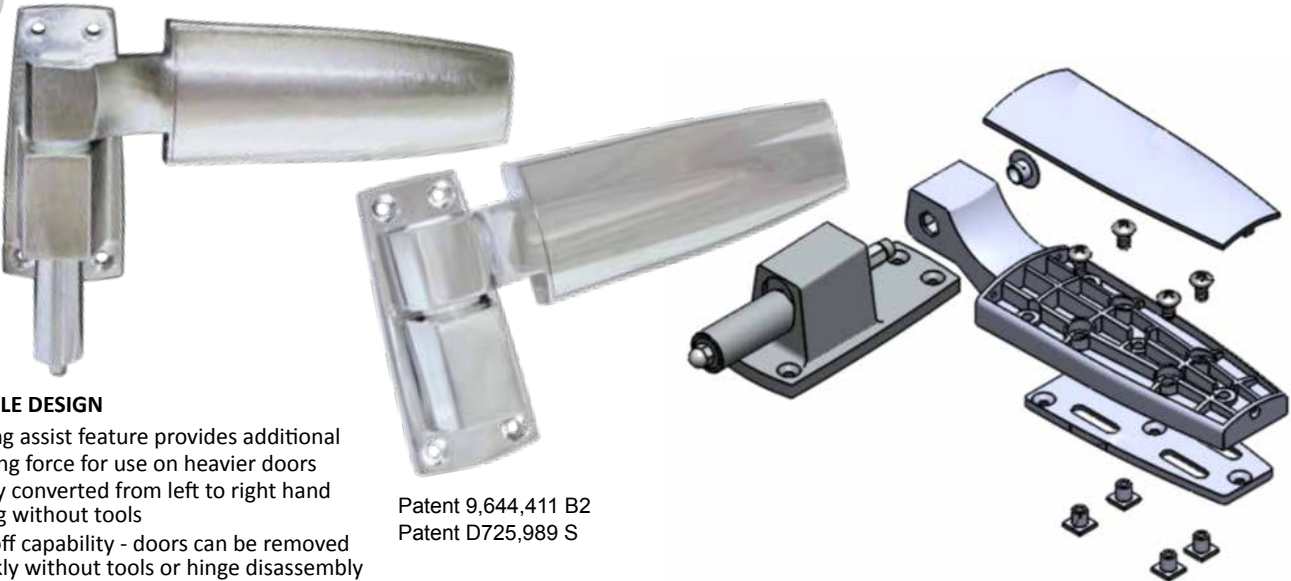

FLEXIBLE DESIGN

- Spring assist feature provides additional closing force for use on heavier doors
- Easily converted from left to right hand swing without tools
- Lift-off capability - doors can be removed quickly without tools or hinge disassembly
- Unique internal adjusting bracket facilitates quick and easy in-place adjustment for door sag
- Available in Polished Chrome or Satin Chrome finish or black covers
- Removable hinge cover conceals mounting holes for clean appearance
- Hinge covers may be personalized with custom colors, logos, etc. for a distinctive look
- Universal mounting holes allow replacement with all competitors' models without redrilling
- Styling coordinated with Component Hardware W30 Series door pulls

UNIQUE CAM ACTION


- Self-lubricating nylon and Delrin cam rise reduce door sweep gasket wear
- Provides constant overclose pressure against door gasket to ensure a positive seal
- Built-in hold open feature allows door to remain open at 140°
- Door automatically returns to a closed position if opened less than 140°

Patent 9,644,411 B2
Patent D725,989 S

W59 SERIES - ADJUSTABLE HINGE HEAVY DUTY WALK-IN COOLER/FREEZER


WITHOUT SPRING		WITH SPRING		A	B
MODEL NO. POLISHED CHROME	MODEL NO. SATIN CHROME	MODEL NO. POLISHED CHROME	MODEL NO. SATIN CHROME		
W59-1000	W59-2000	W59-3000	W59-4000	FLUSH	1.28" (32.5mm)
W59-1012	W59-2012	W59-3012	W59-4012	0.12" (3.1mm)	1.41" (35.8mm)
W59-1025	W59-2025	W59-3025	W59-4025	0.25" (6.4mm)	1.53" (38.9mm)
W59-1037	W59-2037	W59-3037	W59-4037	0.38" (9.7mm)	1.66" (42.2mm)
W59-1112	W59-2112	W59-3112	W59-4112	1.12" (28.5mm)	1.28" (32.5mm)
W59-1125	W59-2125	W59-3125	W59-4125	1.25" (31.8mm)	1.41" (35.8mm)
W59-1137	W59-2137	W59-3137	W59-4137	1.38" (35.1mm)	1.53" (38.9mm)
W59-1150	W59-2150	W59-3150	W59-4150	1.5" (38.1mm)	1.66" (42.2mm)
W59-1162	W59-2162	W59-3162	W59-4162	1.62" (41.2mm)	1.28" (32.5mm)
W59-1175	W59-2175	W59-3175	W59-4175	1.75" (44.5mm)	1.41" (35.8mm)
W59-1187	W59-2187	W59-3187	W59-4187	1.87" (47.5mm)	1.53" (38.9mm)
W59-1200	W59-2200	W59-3200	W59-4200	2.0" (51mm)	1.66" (42.2mm)

Note: Standard hinge cover matches hinge. For black plastic cover, add "-CBLK" to model number.

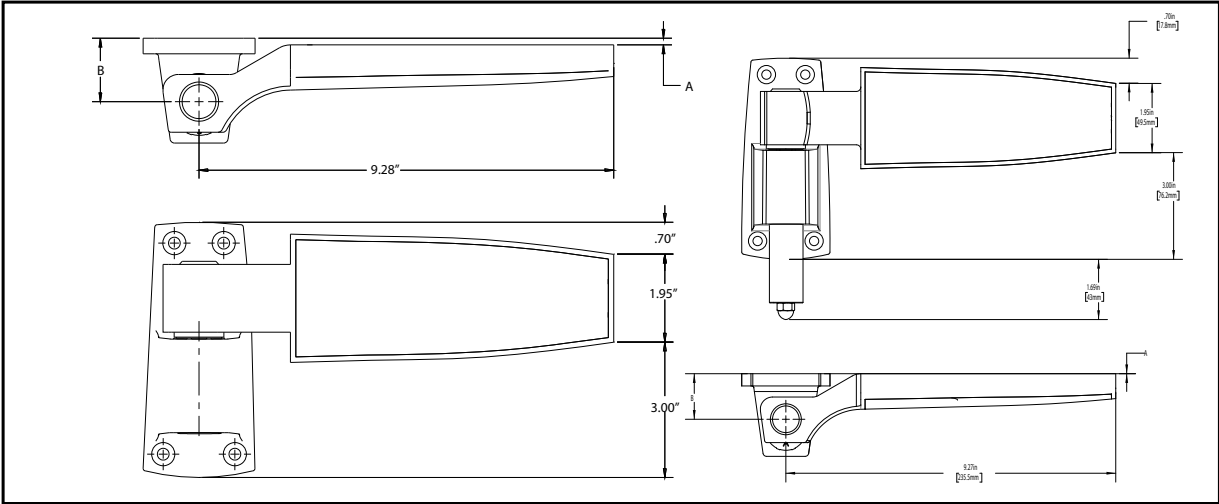



COMPONENT

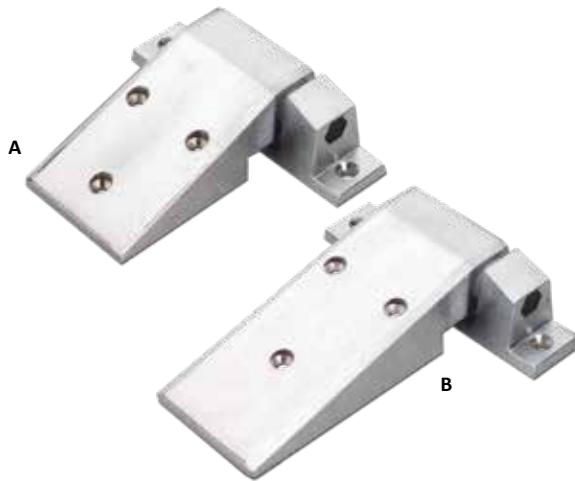


REVERSIBLE SELF-CLOSING HINGE WITH CAM-RISE CONSTRUCTION

- Contemporary design and heavy precision die-cast construction provides durable, dependable service
- Self-closing, self-lubricating, self-rising cam provides smooth quiet closing action
- Lift-off and reversible non-handed cam design allows for easy field installation
- Special cam design feature provides a hold open dwell at 100° opening to facilitate loading and unloading of cooler
- Available in both long and short strap models
- Special satin chrome finish offers years of clean, trouble-free use while matching related hardware and cooler door coverings
- Polished chrome finish available
- Optional spring assist cartridge assembly available for accelerated and positive door closing

REF.	MODEL NO.	A	B	FINISH
A	W55-1000 Short Flange Assembly, Flush Offset	1-15/16" (49mm)	5-5/16" (135mm)	Satin Chrome
	W56-1000 Long Flange Assembly, Flush Offset	2-1/2" (64mm)	7-5/16" (186mm)	Satin Chrome

MODEL NO. W55-0001 OPTIONAL POWER SPRING KIT FOR USE WITH W55/56 HINGES

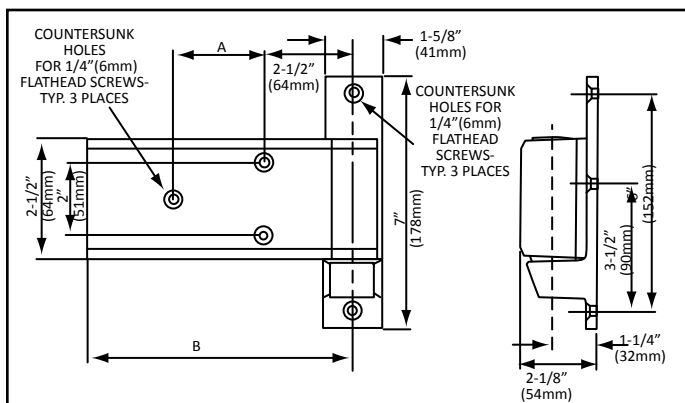


HYDRAULIC DOOR CLOSER FOR WALK-IN REFRIGERATORS AND FREEZERS

- RUGGED CONSTRUCTION
- DEPENDABLE ACTION
- CONTEMPORARY DESIGN
- ECONOMICAL
- Overcomes difficulties experienced in closing a refrigerator or freezer door against the air that compresses inside
- Actually pulls refrigerator or freezer door closed while allowing the compressed air in the unit to slowly escape, then holds door firmly closed to eliminate loss of refrigerated air
- Where severe temperature and pressure conditions combine to force doors open, responds to the released pressure and immediately recloses the door
- Universal mounting holes, permit easy REPLACEMENT* of competitive models, complete with white snap-on dust cover.

MODEL NO. R55-1010 FOR FLUSH DOORS

MODEL NO. R55-1020 FOR 1-1/8" (29mm) OFFSET DOORS

REPLACES STANDARD-KEIL #2882 WITH COMPONENT HARDWARE QUALITY HARDWARE

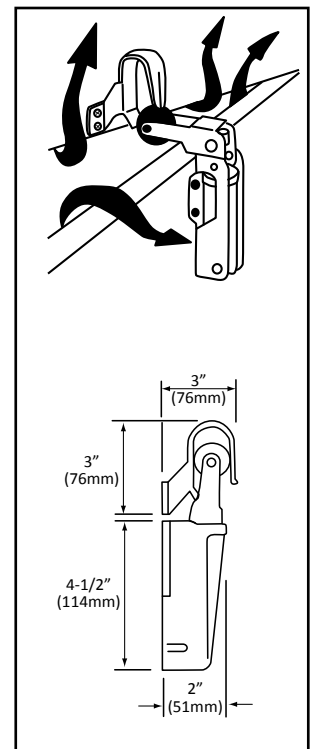




C

HEAVY-DUTY HYDRAULIC SNUGGER™

- MODEL NO. W94-1010 – Flush Offset, Stainless Steel
MODEL NO. W94-1020 – 1-1/8" (29mm) Offset, Stainless Steel
MODEL NO. W94-2010 – Flush Offset, Chrome Plated Steel
MODEL NO. W94-2020 – 1-1/8" (29mm) Offset, Chrome Plated Steel

- Snugger's powerful gas-loaded hydraulic cylinder provides positive, smooth door closure
 - Unique cover design provides for easy installation and concealed mounting
- Cushioned rubber roller and unique spring design offers smooth, quiet, trouble-free operation
 - Available in popular flush and 1-1/8" offsets
- Interchangeability - unique concealed mounting hole pattern allows Snugger to easily replace all existing models in the field
 - Mounting template provided

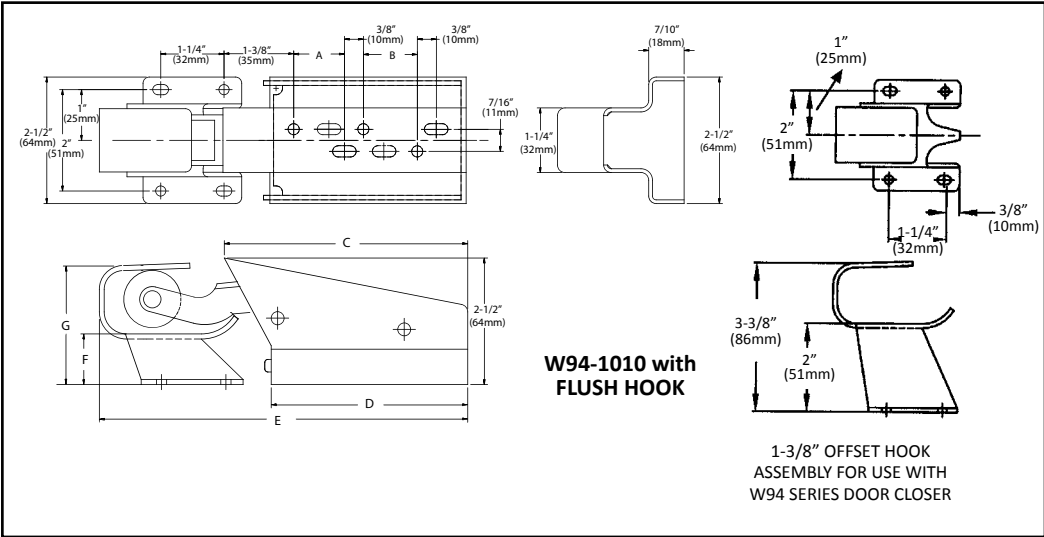

W94-1010/W94-2010

REF.	DESCRIPTION
A	1" (25mm)
B	2-7/16" (62mm)
C	7-7/16" (189mm)
D	6-1/2" (165mm)
E	9-15/16" (252mm)
F	1" (25mm)
G	2-3/8" (60mm)



C

HEAVY-DUTY SPRING ACTION CLOSE-MASTER™

STAINLESS STEEL

MODEL NO. W95-1010 – Flush Offset

MODEL NO. W95-1020 – 1-1/8" (29mm) Offset

MODEL NO. W95-1030 – 1-3/8" (35mm) Offset


CHROME PLATED STEEL

MODEL NO. W95-2010 – Flush Offset

MODEL NO. W95-2020 – 1-1/8" (29mm) Offset

MODEL NO. W95-2030 – 1-3/8" (35mm) Offset

- Close-Master spring action permits fast door closure and positive gasket seal, reducing energy costs
 - Concealed Mounting offers clean, tamperproof appearance
 - Unique cover design provides for easy installation and concealed mounting
- Cushioned rubber roller and unique spring design offers smooth, quiet, trouble-free operation
 - Available in popular flush, 1-1/8" and 1-3/8" offsets
- Interchangeability - unique concealed mounting hole pattern allows Close-Master to easily replace all existing models in the field
 - Re-designed back plate permits easier adjustment during installation and prevents roller arm from hitting top of door
 - Mounting template provided

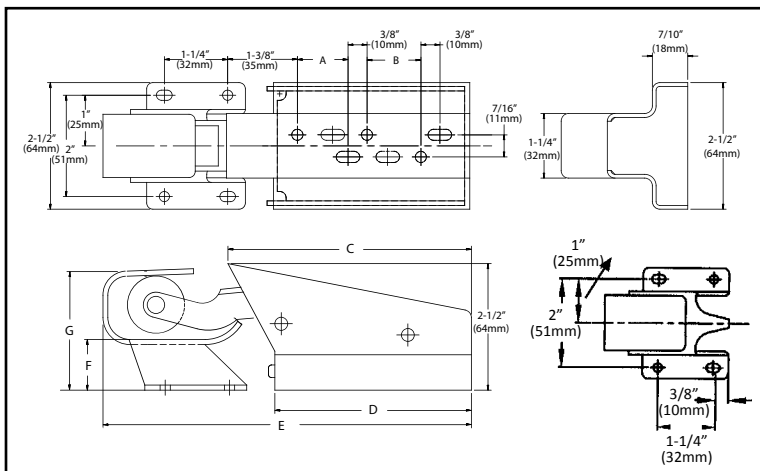


REF.	FLUSH	1-1/8	1-3/8
A	1" (25mm)	1" (25mm)	1" (25mm)
B	1-1/16" (27mm)	1-1/16" (27mm)	1-1/16" (27mm)
C	4-13/16" (122mm)	4-13/16" (122mm)	4-13/16" (122mm)
D	3-7/8" (98mm)	3-7/8" (98mm)	3-7/8" (98mm)
E	7-1/4" (184mm)	7-1/4" (184mm)	7-1/4" (184mm)
F	1" (25mm)	2" (51mm)	2-1/4" (57mm)
G	2-3/8" (60mm)	3-3/8" (86mm)	3-5/8" (93mm)



C



REFRIGERATOR / FREEZER THERMOMETERS

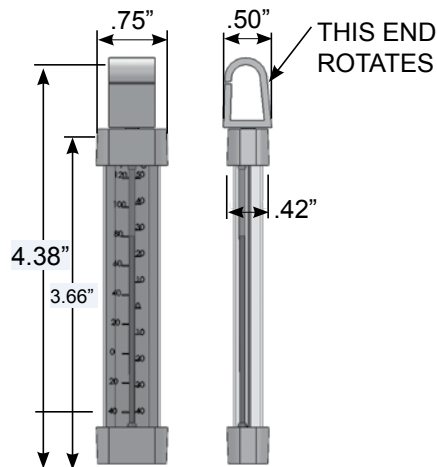


ECONOMICAL REFRIGERATOR / FREEZER THERMOMETER MODEL NO. T90-330

- DUAL SCALE TEMPERATURE RANGE
-40° TO 120°F (-40° TO 50°C)
- NON-TOXIC SOLUTION IN COMPLETELY SEALED GLASS TUBE
 - HANGS FROM SHELF OR FASTENS PERMANENTLY
 - UNIQUE 360° SWIVEL MOUNTING BRACKET




C

REFRIGERATOR / FREEZER THERMOMETERS

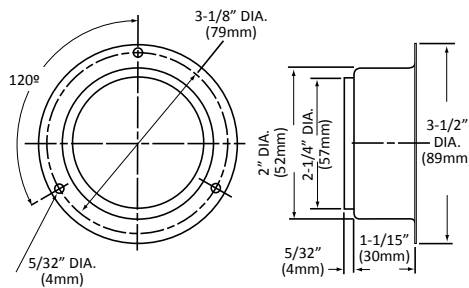

**SURFACE MOUNT THERMOMETER
MODEL NO. T90-6812**

- DUAL SCALE TEMPERATURE RANGE -40° TO 65°F (-40° TO 20°C) • STAINLESS STEEL HOUSING
- 2" DIAL - 3-1/2" FLANGE • RECALIBRATEABLE
- ACCURACY + 2% • 48" CAPILLARY

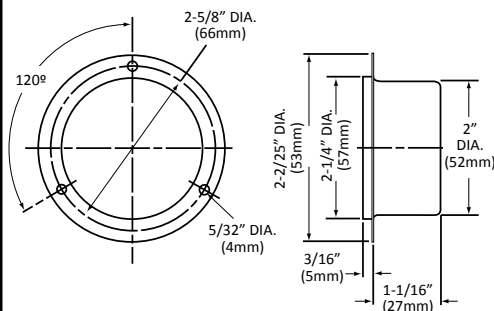

**FLUSH FRONT RECESSED MOUNT
THERMOMETER
MODEL NO. T90-6142**

- DUAL SCALE TEMPERATURE RANGE -40° TO 65°F (-40° TO 20°C) • STAINLESS STEEL HOUSING
- ACCURACY + 2% • 2" DIAL - 3" FLANGE
- RECALIBRATEABLE • 48" CAPILLARY



C



W88 SERIES VENT PORT FOR WALK-IN REFRIGERATORS AND FREEZERS


- Heated vents prevent freeze-ups and reduce cooler condensation
- Two way valve unit allows air flow in dual directions, compensates for expansion and contraction during refrigeration cycles
 - Supplied in 120V or 220V Models

PRESSURE RELIEF PORT

MODEL NO.	VOLTAGE	APPLICATION
W88-1010	120V/23 Watts with Heater	Freezer
W88-1012	220V/23 Watts with Heater	Freezer
W88-2010	Non-Heated	Cooler

SPECIFICATIONS

MATERIAL: All Aluminum
INTERNAL SLEEVE: Lexan, Self-extinguishing
FINISH: Textured Aluminum
ELECTRICAL REQUIREMENTS: 120V or 220V Specify voltage requirements
4" (102mm) standard size wall thickness
When ordering specify other wall thickness. Drilled for No. 8 (4mm) screws

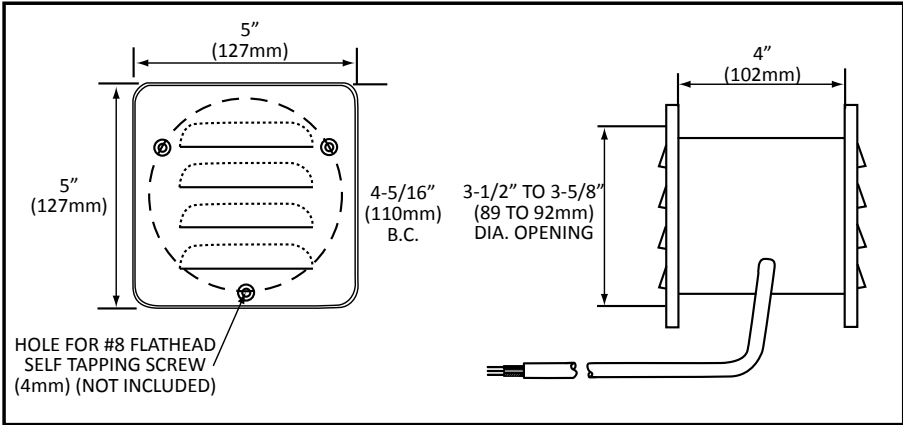

File No. LR29496





File No. E73857



WINDOW VIEWPORTS WITH ALUMINUM COVER FOR WALK-IN COOLER AND FREEZER APPLICATIONS- AVAILABLE HEATED AND NON-HEATED

- Brushed aluminum frame • Tempered triple pane glass on all models
- Argon filled space between glass on all models for added e-factor and to comply with Energy Independence Act of 2007
- Heated models for 120V/60Hz freezer applications to prevent fogging • Helps to minimize ingress/egress accidents
- Ideal for walk-in cooler/freezer applications and environmental chambers

MODEL NO.	DESCRIPTION	CUT-OUT SIZE	DOOR WIDTH	VOLTAGE (VAC)	CURRENT (Amp)	POWER (Watts)	FREQUENCY (Hz)
W91-1414-HGHF	Argon Gas Filled Space Between 3 Layers of Glass with Heated Frame and Heated Glass	16-15/16" (430mm) Square	3-1/2" (89mm) To 4" (102mm)	120	0.7	84	60
W91-14143-UGUF	Argon Gas Filled Space Between 3 Layers of Glass with Un-Heated Frame and Un-Heated Glass			—	—	—	—
W91-1424-HGHF	Argon Gas Filled Space Between 3 Layers of Glass with Heated Frame and Heated Glass	16-15/16" (430mm) x 26-15/16" (684mm)	3-1/2" (89mm) To 4" (102mm)	120	1.0	120	60
W91-14243-UGUF	Argon Gas Filled Space Between 3 Layers of Glass with Un-Heated Frame and Un-Heated Glass			—	—	—	—

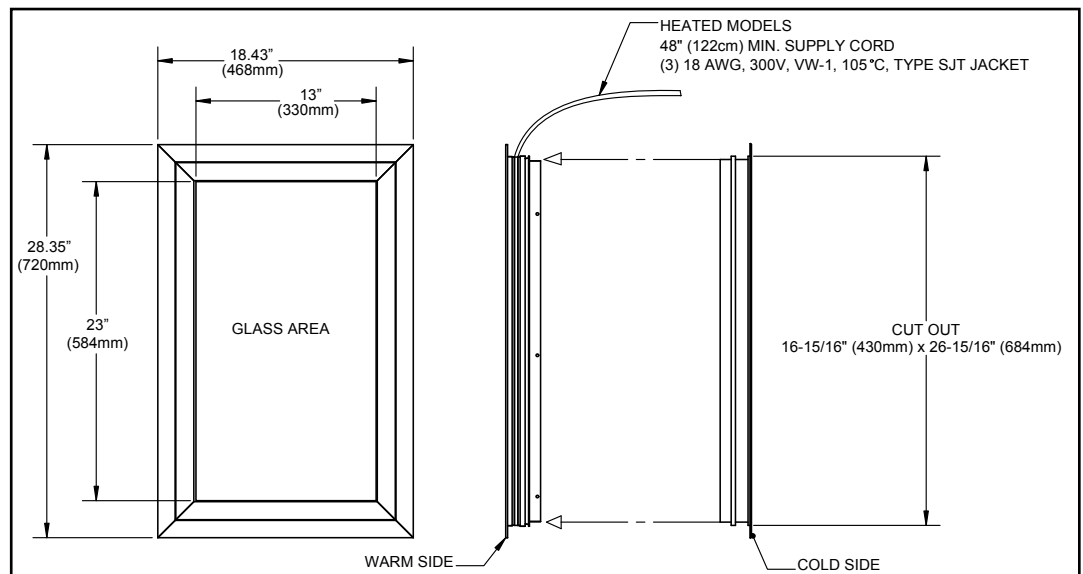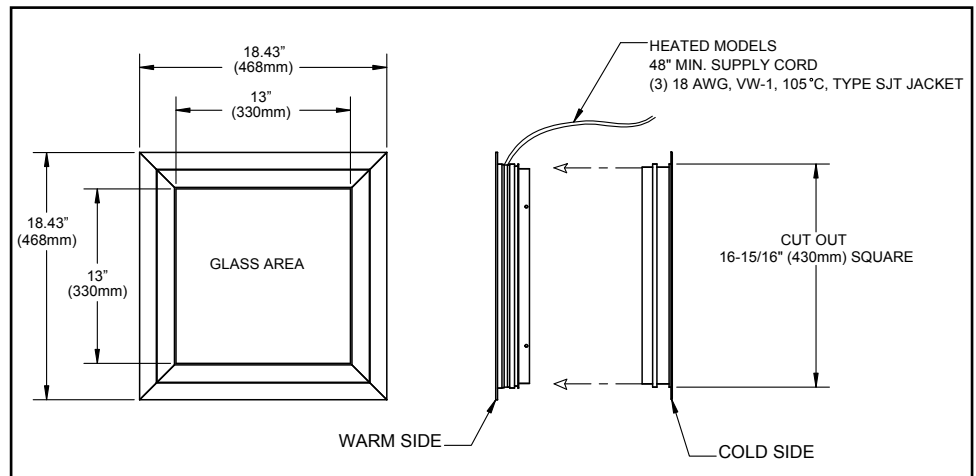

NOTE: Double-sided tape exists all around inside surface of flange.



FIP PANEL FASTENERS

FOAMED-IN-PLACE PANEL FASTENERS

Component Hardware® brand Foamed-In-Place (FIP) Panel Fasteners are ideal for use in high volume fabrication operations when consistency and outstanding performance are your driving concerns. This fastening system provides a fool-proof method for accurately positioning, inserting and anchoring the fasteners into your insulated panels, that will save you both time and money

HOW FIP FASTENERS WORK

Simply affix our dedicated panel fastener adapters to your existing foaming jigs to create a permanent anchor point that insures your fasteners are securely and precisely positioned in every foamed panel. The unique design of these adapters guarantees that the locking points and strikes cannot be installed upside down or on the wrong side of the jig, resulting in reduced scrap and production times. In addition, we manufacture these adapters from hardened steel for durability and extended service life.


Attaching FIP panel fasteners to your foaming jig is as simple as snapping the locking points and strikes on to their respective adapters, closing the jig and foaming your panels. All of our FIP fasteners are designed with specially placed holes in the housing to permit foam to completely fill around the fastener for superior pull-out strength and better insulating properties.

THE COMPONENT HARDWARE® DIFFERENCE


Component Hardware® Refrigeration Hardware is known for innovative design, exceptional value and unsurpassed quality. Our products are manufactured to our exacting standards to insure they can withstand the rigorous demands required in commercial refrigeration applications.

We know that panel fasteners are the “glue” that holds your walk-in cooler/freezer together. If they do not function properly, it can result in increased energy consumption or failure of the structural integrity of the entire unit. That's why all of our panel fasteners undergo rigorous quality inspections to insure our customers of the durability and reliability they have come to know and trust from the Component Hardware® brand.


The next time you are building or specifying a walk-in cooler, freezer or environmental enclosure, be sure that it is made using authentic Component Hardware® brand refrigeration hardware for trouble-free performance and peace of mind.

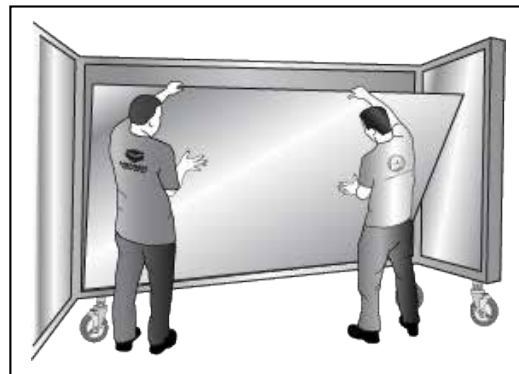


1. Insert outer skin of the panel into the mold.

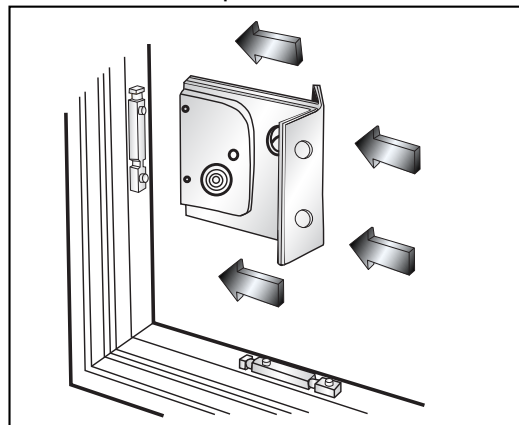


2. Snap fastener (locking point or strike) onto its unique Component Hardware adapter.

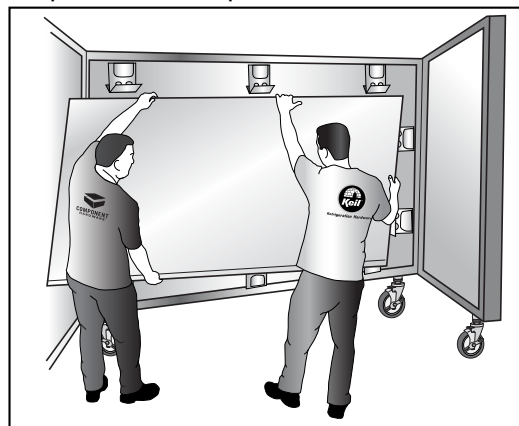

3. Insert inner skin into the mold fixture. Close mold and inject foam.

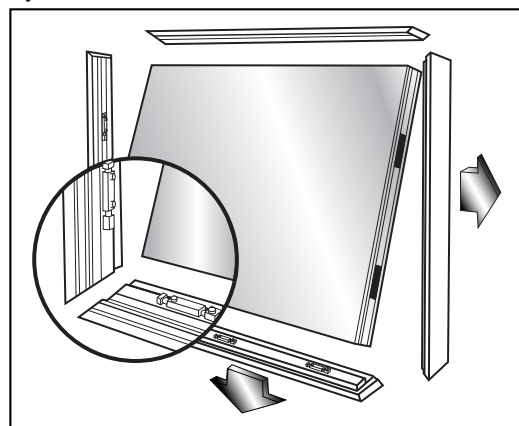

4. After curing, open the mold and retract edge rails. Remove completed panel with fasteners securely in place. Lock panels using Component Hardware Model No. W27-0001-C wrench.



Use Model No. W27-0001-C hexagonal wrench for easy locking of all Component Hardware panel fasteners.



W27 SERIES COMPACT FOAMED-IN-PLACE

**MODEL NO. W27-7300
LOCKING HOOK**


- Friction drive allows hook to slice through foam, locates the female locking pin in mating panel and tightens, providing a positive panel seal
- Zinc plated construction eliminates corrosion concerns and improves mastic adhesion
- Compact construction, superior strength, heavy gauge
 - Permits interchangeability of panels

JIG ADAPTER MODEL NO. W27-1173H

**MODEL NO. W27-7400
STRIKE**

- Interchangeable for use on existing foaming jigs and adapters
 - Special guide ribs are built in the female housing which direct the hook to an on-center position
 - Offers reliable repeat service and performance
- Large diameter foam holes ensure positive foam integrity

JIG ADAPTER MODEL NO. W27-8804

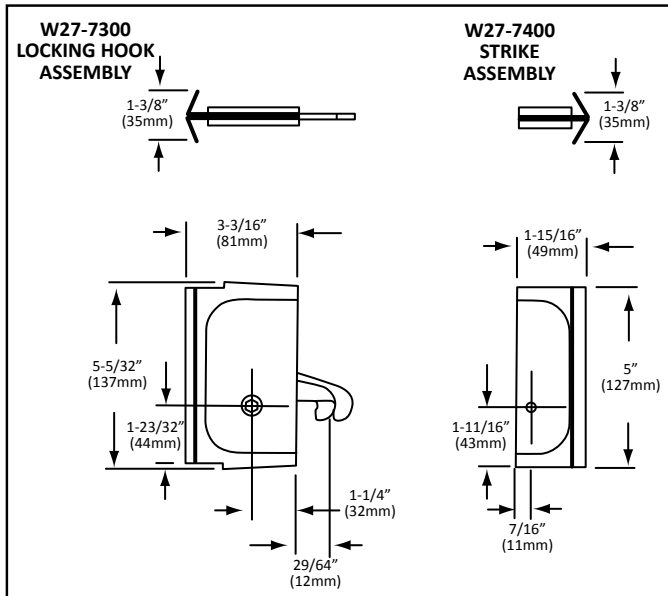

W27 SERIES FOAMED-IN-PLACE, DUAL ACCESS DESIGN


**MODEL NO.
W27-8800TT-SP & W27-8800TT-SS
TWIN TUNNEL LOCKING HOOK**

**MODEL NO.
W27-8801-SP & W27-8801-SS STRIKE**

- Unique Twin Tunnel design provides access to either panel side
 - Provides a positive panel seal
- Interchangeable-for use on existing foaming jigs and adapters
- Friction drive allows hook to slice through foam, locates the female locking pin in mating panel and tightens
 - Heavy gauge, superior strength and economical
 - Zinc plated construction eliminates corrosion concerns and improves mastic adhesion
- Standard flush and extended "Twin-Tunnel" cams available
 - Plastic tunnel cap included at no extra charge
 - Wide fastener wings enhance pull-out strength
- Large diameter foam flow holes ensure positive foam integrity

JIG ADAPTER FOR HOOK: MODEL NO. W27-8803

JIG ADAPTER FOR PIN: MODEL NO. W27-8804

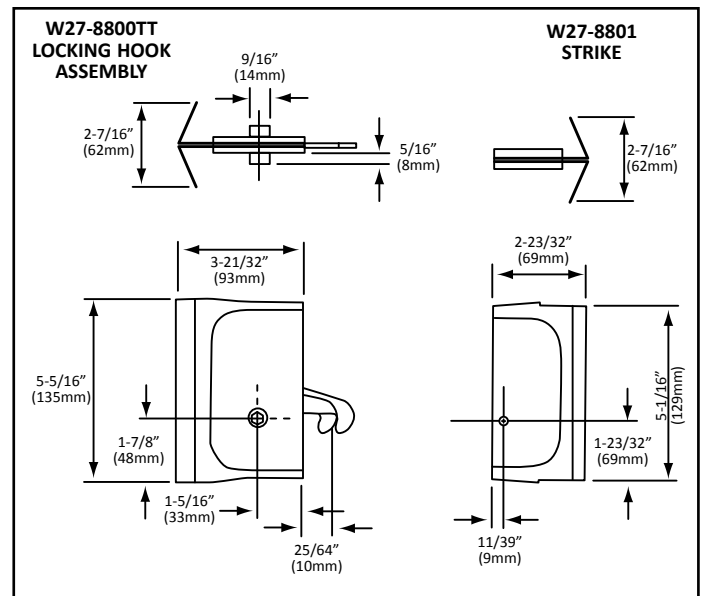

PANEL FASTENER JIG ADAPTERS

- For foam-in-place applications • Readily replaces* all competitor's adapters having same mounting holes with Component Hardware Quality Hardware • Hardened Steel and Electroplated • Adapters available for ALL Component Hardware Foamed-in-Place Fasteners • Competitive pricing

REF.	MODEL NO.	FITS PANEL FASTENER MODELS
A	W27-1173H	W27-7300, 1168BP & 1169BP
B	W27-8803	W27-8800TT & 1188BP
C	W27-8804	W27-8801, W27-7400 & 1188P





SLAB FOAM PANEL FASTENERS

HOW TO BUILD INSULATED PANELS WITHOUT COSTLY TOOLING


Slab Foam Panel Fasteners are ideal for fabricators looking for a low cost method of constructing light weight insulated panels using Styrene, Styrofoam or urethane sheet stock. These plastic block fasteners are available for 2", 4" & 6" wide panels to accommodate applications including environmental enclosures, walk-in coolers and walk-in freezers.

C THE COMPONENT HARDWARE® DIFFERENCE


Component Hardware® Refrigeration Hardware is known for innovative design, exceptional value and unsurpassed quality. Our products are manufactured to our exacting standards to insure they can withstand the rigorous demands required in commercial refrigeration applications.

We know that panel fasteners are the "glue" that holds your walk-in cooler/freezer together. If they do not function properly, it can result in increased energy consumption or failure of the structural integrity of the entire unit. That's why all of our panel fasteners undergo rigorous quality inspections to insure our customers of the durability and reliability they have come to know and trust from the Component Hardware® brand.


The next time you are building or specifying a walk-in cooler, freezer or environmental enclosure, be sure that it is made using authentic Component Hardware® brand refrigeration hardware for trouble-free performance and peace of mind.

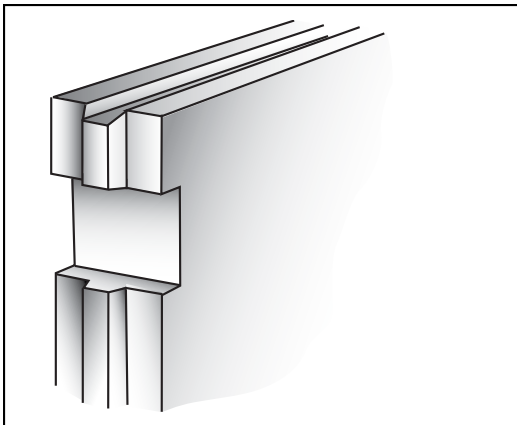


1. Cut insulating material to size. Shape tongue and groove surfaces. Notch panel for fastener.

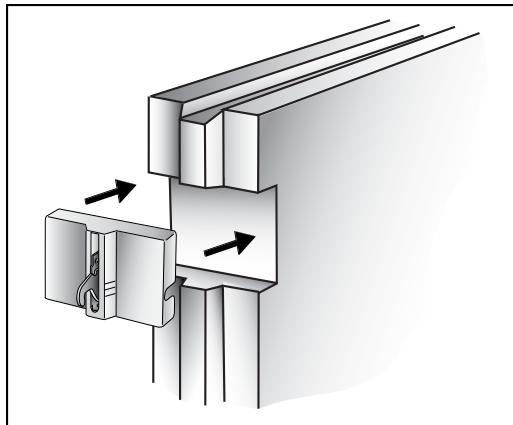


2. Insert plastic housing, either locking point or strike, as needed.

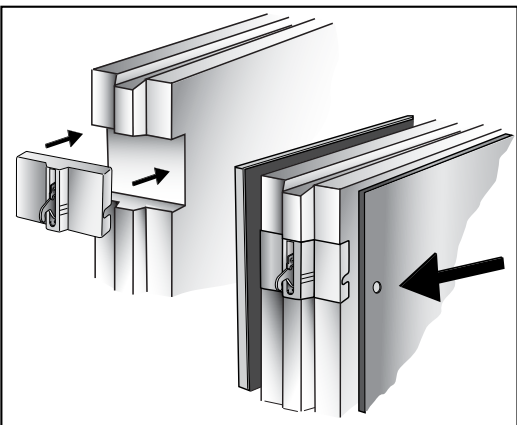

3. Apply adhesive to metal skins. Laminate foam between two skins and apply pressure for bonding. (Return bend on metal helps to hold fastener in place.)

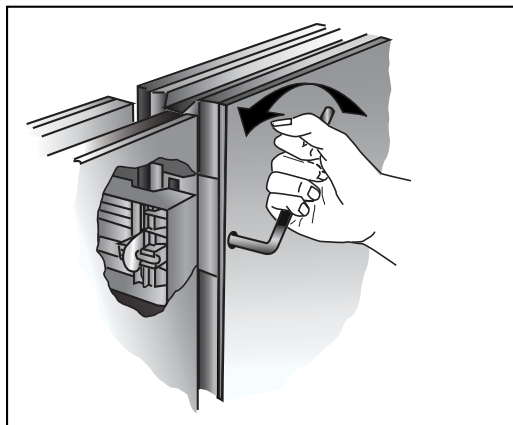



4. After curing, panels are ready for assembly. Completed panels are easily locked in position at assembly site using the Component Hardware W27-0001-C.



Use Model No. W27-0001-C hexagonal wrench for easy locking of all Component Hardware panel fasteners.



W27 SERIES SLAB FOAM ABS BLOCK

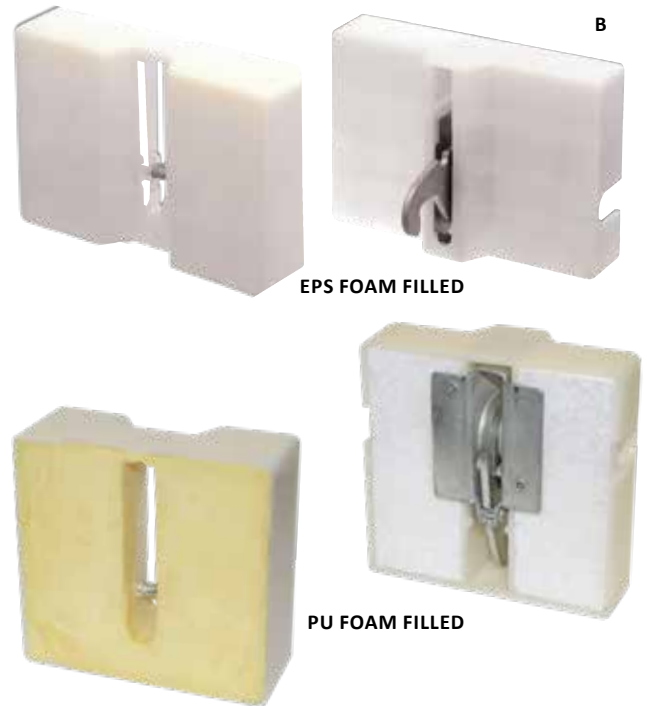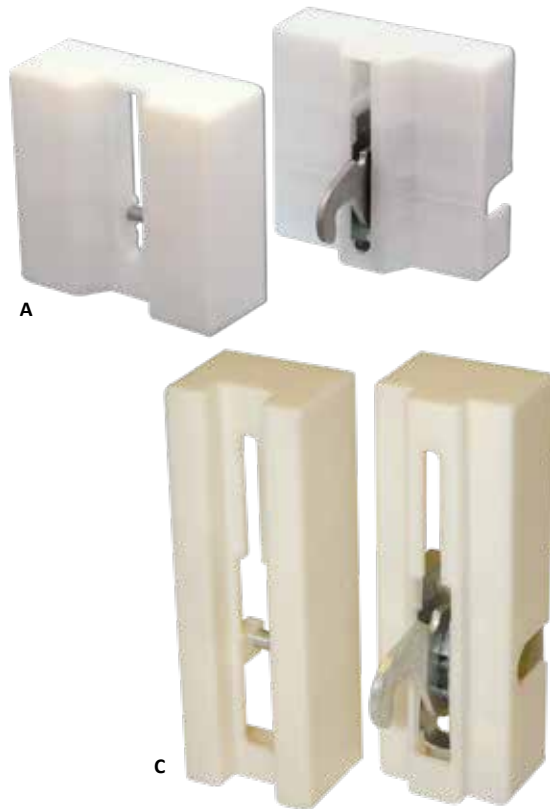

REF. A

SLAB FOAM ABS BLOCK PANEL FASTENERS

MODEL NO. W27-5204

For Gasketed 4" (102mm) Panels

REF. B

SLAB FOAM ABS BLOCK PANEL FASTENERS with FOAM INSULATED BACKING

MODEL NO. W27-5304

For Gasketed 4" (102mm) Panels
EPS Foam Filled

MODEL NO. W27-5306

For Gasketed 6" (152mm) Panels
PU Foam Filled


REF. C

SLAB FOAM ABS BLOCK PANEL FASTENERS

MODEL NO. W27-5202

For Gasketed 2" (51mm) Panels

- Unbreakable ABS housing, zinc plated heavy gauge steel hook and pin
- Permanently attached hook and strike insures integrity and can be activated time and time again
- For use with 2" (51mm), 4" (102mm) and 6" (152mm) panels
- Economical

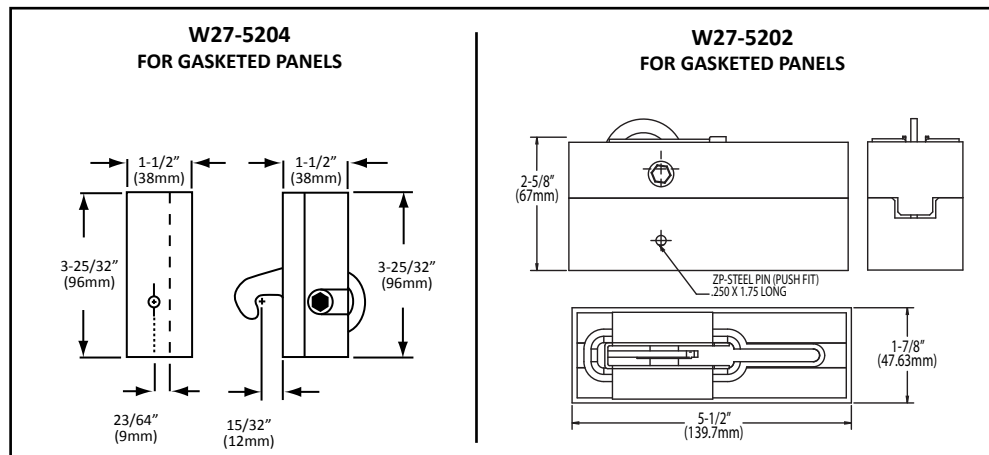



RIGID RAIL PANEL FASTENERS

DESIGNED ESPECIALLY FOR WOOD, HIGH DENSITY FOAM OR METAL FRAME RAILS


This series of Component Hardware® brand panel fasteners is designed for use with wood, high density foam or metal frame rail insulated panels. This economical method of producing pre-fabricated insulated panels permits the manufacturer to build panel sections of virtually any size or shape. We offer a wide array of rigid rail locking points, strikes and pins, which may be combined to accommodate a broad range of panel thicknesses, joint types and rail materials.

THE COMPONENT HARDWARE® DIFFERENCE


Component Hardware® Refrigeration Hardware is known for innovative design, exceptional value and unsurpassed quality. Our products are manufactured to our exacting standards to insure they can withstand the rigorous demands required in commercial refrigeration applications.

We know that panel fasteners are the “glue” that holds your walk-in cooler/freezer together. If they do not function properly, it can result in increased energy consumption or failure of the structural integrity of the entire unit. That’s why all of our panel fasteners undergo rigorous quality inspections to insure our customers of the durability and reliability they have come to know and trust from the Component Hardware® brand.


The next time you are building or specifying a walk-in cooler, freezer or environmental enclosure, be sure that it is made using authentic Component Hardware® brand refrigeration hardware for trouble-free performance and peace of mind.




Use Model No. W27-0001-C hexagonal wrench for easy locking of all Component Hardware panel fasteners.

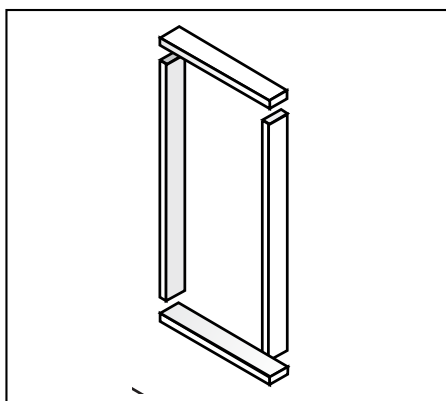


1. Cut frame material to form panel perimeter.

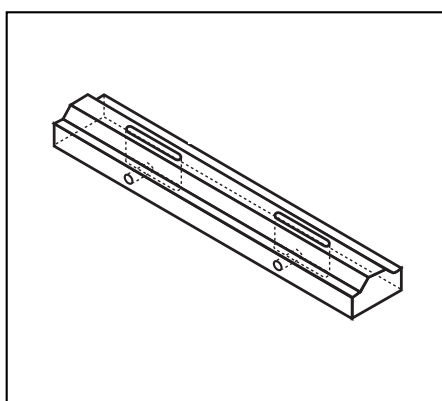


2. Determine locations for fasteners and mortise, dado, or rout slots. Drill wrench holes. (If using W27-5501/5502, drill pin holes.)

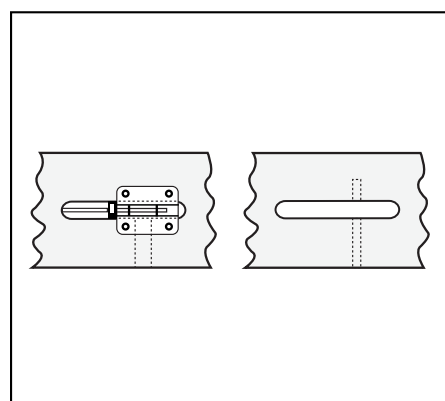


3a. Place fastener in slot and nail or staple in place.
3b. If using W27-5501/5502 pin, insert in drilled pin holes. (Taping of back may be required when foaming.)

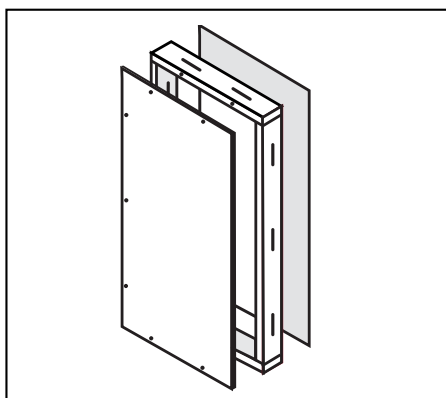


4. Assemble frame with panel skins.

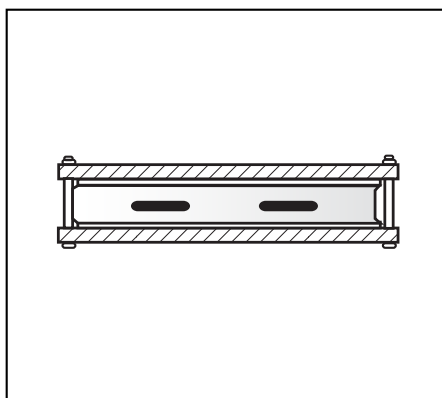

5. Clamp panel in restraining fixture and inject foam.

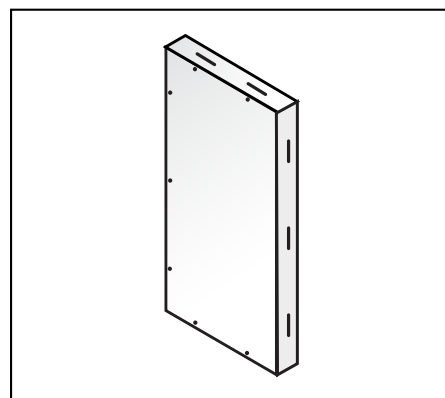

6. The finished panels are ready for fast, easy joining using W27-0001-C wrench.

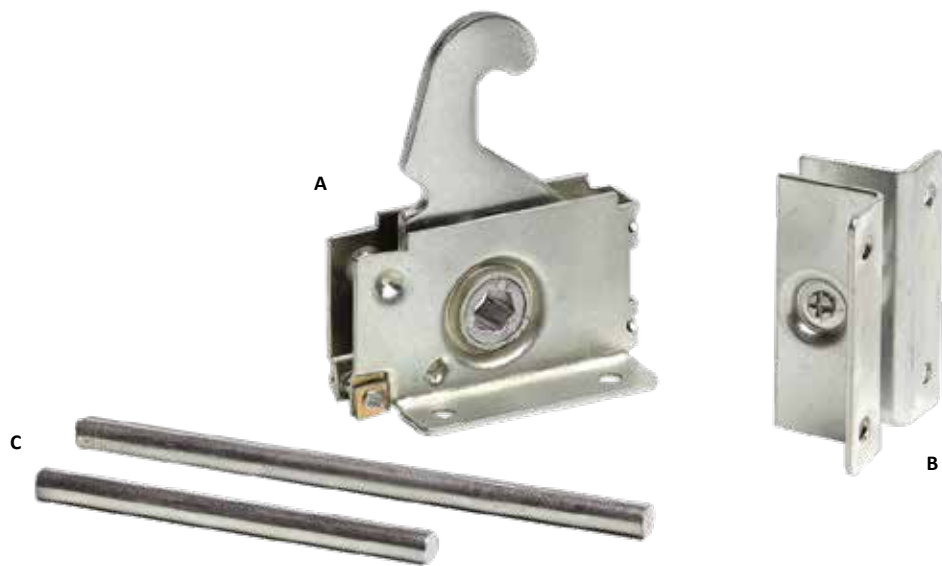

W27 SERIES WOOD FRAME AND METAL FRAME

MODEL NO.
W27-5600A & W27-5600B
LOCKING HOOK


MODEL NO.	X	Y
W27-5600A	1-7/16" (37mm)	1-31/32" (50mm)
W27-5600B	1-7/16" (37mm)	2-11/32" (60mm)

- Zinc plated
- Ideal for wood, high density rail or metal frame construction
- Stamped holes provided for easy mounting with staple, screw or nails
 - Heavy-duty steel housing
- Assorted offset strike assemblies or strike pins available
 - Economical


MODEL NO.
W27-55 SERIES
LOCKING STRIKE

MODEL NO.	"A" OFFSET
W27-5550	1/2" (13mm)
W27-5562	5/8" (16mm)
W27-5568	11/16" (17mm)
W27-5575	3/4" (19mm)
W27-5581	13/16" (21mm)

REF. A
W27-5600A & W27-5600B
LOCKING HOOK

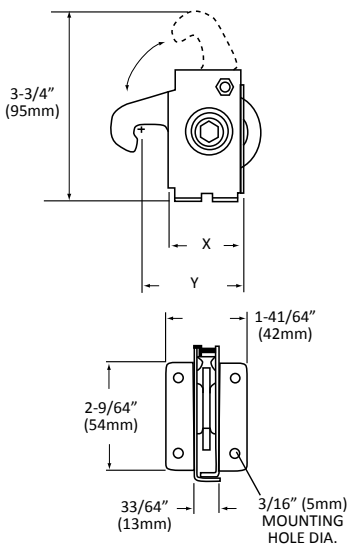

REF. B
W27-55xx
LOCKING STRIKE



- REF. C
- W27-5501 PIN, SHORT**
3-1/4" (82mm) x 1/4" (6mm) DIA.
- W27-5502 PIN, LONG**
4-3/4" (120mm) x 1/4" (6mm) DIA.



ACCESSORIES FOR WALK-IN REFRIGERATION & FREEZERS

REF. A

CAULKING GUN

For Use with
10.3 oz (305ml) cartridges

MODEL NO. Q99-1000

REF. D

**SNAP-IN
FINISHING CAP**

MODEL NO. W27-0002-C

- 3/4" diameter
- Max hole diameter 49/64"
- Grey polyethylene
- For use with W27 series panel fastener
- Covers wrench holes for clean appearance

REF. B

SILICONE SEALER

- Fits all standard caulking guns
 - F.D.A. APPROVED
 - U.L. RECOGNIZED
- MEETS F.D.A. EXTRACTION REQUIREMENT
- Silicone Sealant 10.3 oz (305ml) cartridge
 - Supplied with removable tip



MODEL NO.	COLOR	MAXIMUM SERVICE TEMP.
M90-1010	Clear	400°F (232°C)
M90-1012	Aluminum	400°F (232°C)

Sold in case quantities – 12 tubes per case

REF. E

SNAP-ON MOULDING

- Stainless steel cover with galvanized back plate
- Ideal for use as a back-up plate for gaskets around door jam

MODEL NO.	WIDTH
J60-2220*	1/2" (13mm)
J60-2240	3/4" (19mm)
J60-2260	1" (25mm)
J60-2270	1-1/4" (32mm)
J60-2320*	2" (51mm)

12 FT. (3657mm) LENGTHS *NON-STOCK ITEM AVAILABLE ON APPLICATION SPECIAL LENGTHS AVAILABLE UPON REQUEST

REF. C

HEX WRENCH

MODEL NO. W27-0001-C
MODEL NO. W27-0001-CTS*

*Hex wrench with rubber sleeve

- 6" x 6" (152mm x 152mm)
 - Hardened steel
- For use with W27 series panel fasteners
- Readily replaces competitors' wrenches

HOT SIDE APPLICATIONS



Recessed Mount
LED Exhaust Hood Light



Recessed Mount
Dimmable LED Down Light



Surface Mount
LED Exhaust Hood Light



Recessed Mount
LED Perimeter Light

COLD SIDE APPLICATIONS



LED Vapor-Tight Strip Light



Dimmable, Linkable
LED Display Light



LED Appliance Bulb




6W LED A19 Filament
Appliance Bulb



4W LED E17 Tubular Filament
Appliance Bulb

DIMMABLE LED DISPLAY LIGHTS	D96	RECESSED MOUNT LED HOOD LIGHTS	D104-D105
LOW VOLTAGE LED DISPLAY LIGHTS	D97	RECESSED MOUNT FLUORESCENT AND INCANDESCENT LIGHTS	D106
LED COOLER/FREEZER LIGHTS	D98	SURFACE MOUNT LED HOOD LIGHTS	D107
COOLER/FREEZER LED BULBS AND FIXTURES	D99-D100	SURFACE MOUNT HOOD LIGHT FIXTURES	D108
SURFACE MOUNT INCANDESCENT LIGHT FIXTURES AND ACCESSORIES	D101	HOOD LIGHT ACCESSORIES	D109
INCANDESCENT REFRIGERATOR LIGHTS AND ACCESSORIES	D102	ELECTRICAL OUTLETS COMPONENTS	D110-D111
ROUND RECESSED DIMMABLE LED DOWN LIGHT	D103		

Dimmable LED Display Lights

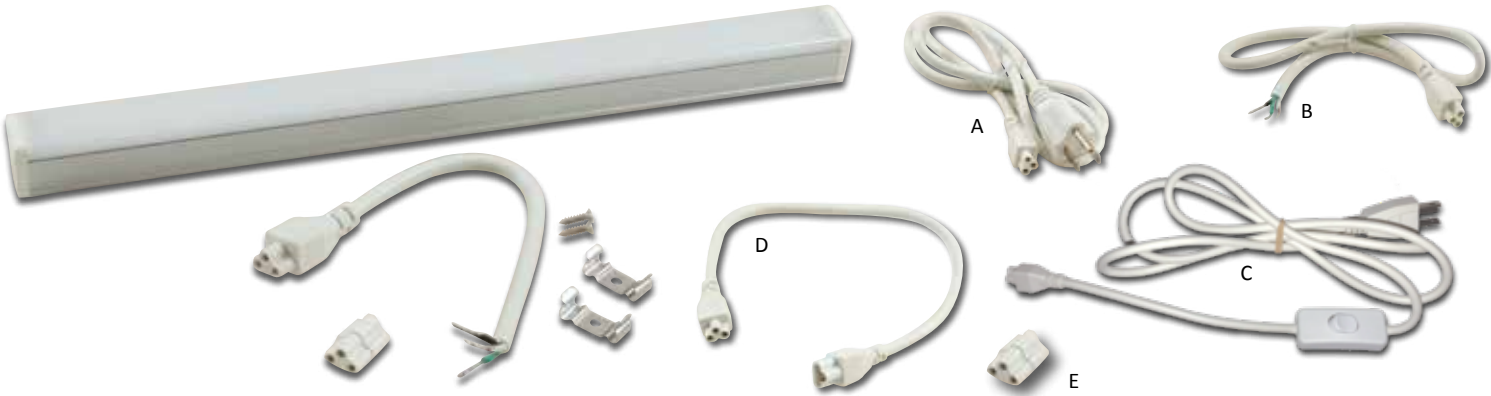

DIMMABLE, LINKABLE LED LIGHT FOR REFRIGERATED AND AMBIENT APPLICATIONS


D


- Lights are compatible with standard TRIAC dimmer controls for LED lighting that are available from most electrical wholesalers – not sold by Component Hardware
- 60-foot maximum linkable length of combined fixtures
- Can be connected using various length linking cables or direct linking connectors
- Operating temperature from -4°F to 105°F (-20°C to 40°C)
- cULus listed for use in damp locations
- Aluminum alloy housing with polycarbonate cover and end caps
- Instant-on, no ballast to warm up
- Super slim, easy to install
- 50,000+ hours rated life; reduces landfill waste; lowers maintenance costs
- Exceeds Federal Energy Act requirement
- Contributes to LEED® energy use reduction credits
- No ultraviolet emission; does not attract insects
- LEDs emit little heat into refrigerated space

MODEL NO.	NOMINAL LENGTH (L)	INITIAL LUMENS	CURRENT CONSUMPTION	WATTS
LED-RB08-DIM-x	8" (203mm)	280	35mA	4
LED-RB12-DIM-x	12" (305mm)	490	45mA	6
LED-RB18-DIM-x	18" (457mm)	650	75mA	9
LED-RB24-DIM-x	24" (610mm)	880	100mA	12
LED-RB30-DIM-x	30" (762mm)	1070	130mA	15
LED-RB36-DIM-x	36" (915mm)	1280	150mA	18
LED-RB48-DIM-x	48" (1220mm)	1700	180mA	23

Accessories

REF.	MODEL NO.	DESCRIPTION
A	LED-RB-X110	36" (914mm) Long AC Power Cord with 3 Prong Plug
A	LED-RB-X112	48" (1219mm) Long AC Power Cord with 3 Prong Plug
A	LED-RB-X115	72" (1829mm) Long AC Power Cord with 3 Prong Plug
B	LED-RB-X150	18" (457mm) Long AC Power Supply Cord with Tinned Leads
B	LED-RB-X155	36" (914mm) Long AC Power Supply Cord with Tinned Leads
B	LED-RB-X160	72" (1829mm) Long AC Power Supply Cord with Tinned Leads
C	LED-RB-X170	65" (1651mm) Long AC Power Supply Cord with 3A Rated In-Line Switch and a 3 Prong Plug
D	LED-RB-X206	6" (152mm) Linking Cable
D	LED-RB-X212	12" (305mm) Linking Cable
D	LED-RB-X218	18" (457mm) Linking Cable
D	LED-RB-X224	24" (610mm) Linking Cable
D	LED-RB-X236	36" (914mm) Linking Cable
D	LED-RB-X270	70" (1178mm) Linking Cable
E	LED-RB-X300	Linking Connector
N/A	LED-RB-X200	Rotary Mounting Bracket
N/A	LED-RB-X500	Rotary Mounting Bracket with Magnet
N/A	LED-RB-X501	Stationary Mounting Bracket

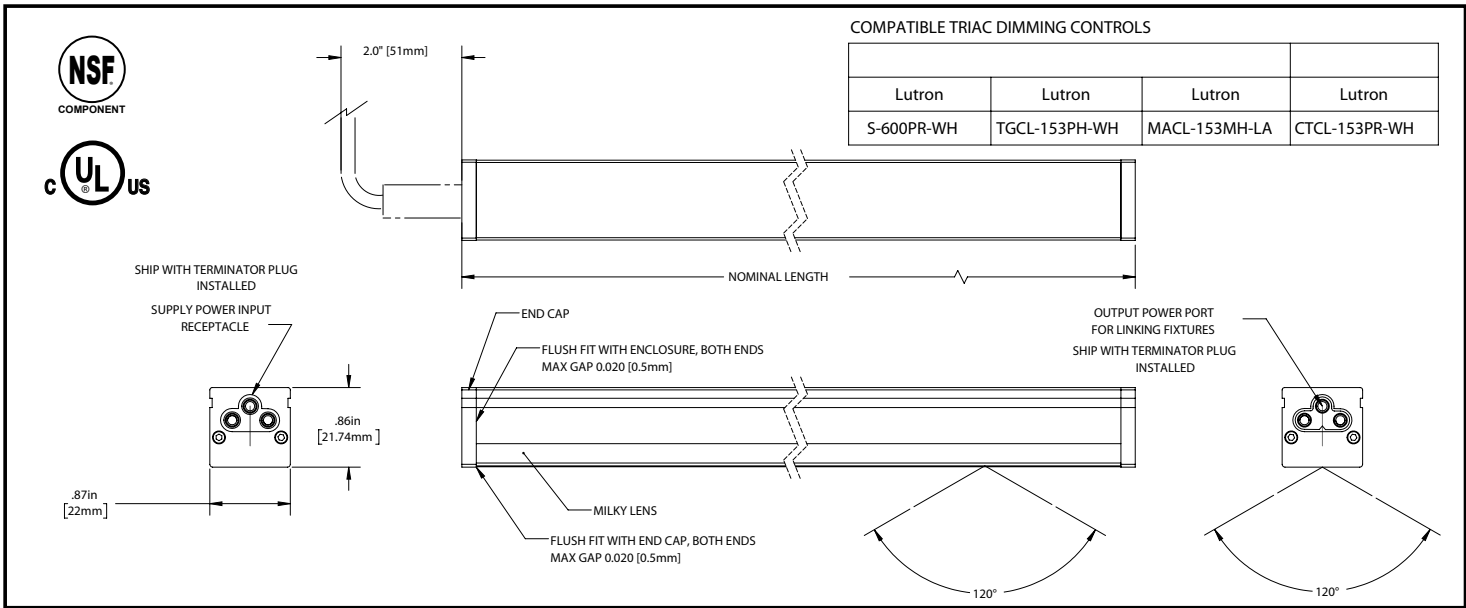

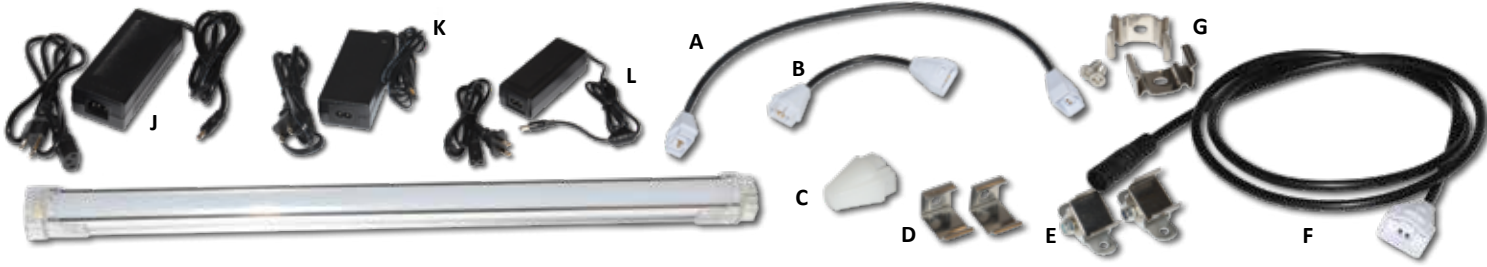

ULTRA SLIM LINKABLE LED LIGHTS FOR REFRIGERATED AND AMBIENT APPLICATIONS

- Operating temperature from -4°F to 105°F (-20°C to 40°C) • Operated by 24VDC low voltage drives • LED lamps emit little heat into refrigerated space
- Aluminum alloy housing with polycarbonate cover and end caps • All lights to be operated by remote driver (cables and driver sold separately) • Maximum connection length of fixtures is 20' (6m) • Lights can be linked directly together or with linking cable • Supplied with metal mounting clips and zinc plated steel flat head screws
- 50,000+ hours rated life; reduces landfill waste; lowers maintenance costs • No ultraviolet emission; does not attract insects • Mercury-free
- Contributes to LEED® energy use reduction credits • Exceeds Federal Energy Act requirement • ETL listed

SPECIFICATIONS

MODEL NO.	ACTUAL LENGTH (L)	INITIAL LUMENS	CURRENT CONSUMPTION	WATTS
LED-RR12-x	11.8" (300mm)	350	160mA	4
LED-RR18-x	17.7" (450mm)	540	250mA	6
LED-RR20-x	19.7" (500mm)	610	290mA	7
LED-RR30-x	30.5" (775mm)	790	375mA	10
LED-RR35-x	35.8" (910mm)	920	458mA	12
LED-RR40-x	39.4" (1000mm)	1040	540mA	13
LED-RR48-x	47.2" (1200mm)	1440	660mA	16

DRIVERS


REF.	MODEL NO.	INPUT VOLTAGE	AMPERAGE	OUTPUT	MAX FIXTURES	CORD LENGTH
J	LED-RR-402	100 - 240VAC	4.0	96W	19 ft	48" Input/Output
K	LED-RR-401	100 - 240VAC	2.5	60W	12 ft	48" Input, 70" Output
L	LED-RR-400	100 - 240VAC	1.5	36W	7 ft	70" Output

REF. ACCESSORIES

A	LED-RR-X112	12" (305mm) Linking Cable
A	LED-RR-X139	39" (991mm) Linking Cable
B	LED-RR-X103	3" (76mm) Linking Cable
C	LED-RR-X100	End Cap to Terminate Last Fixture
D	LED-RR-X303	(2) Mounting Clips for 30° Mounting Angle
D	LED-RR-X304	(2) Mounting Clips for 45° Mounting Angle
E	LED-RR-X305	(2) Mounting Clips for Rotary Mounting
F	LED-RR-X201	12" (305mm) Cable from Rigid Bar to LED Driver w/DC Connector
F	LED-RR-X202	39" (991mm) Cable from Rigid Bar to LED Driver w/DC Connector
-	LED-RR-X203	12" (305mm) Cable from Rigid Bar to LED Driver w/Flying Leads
-	LED-RR-X204	39" (991mm) Cable from Rigid Bar to LED Driver w/Flying Leads
G	LED-RR-X302	(2) Mounting Clips Parallel to Mounting Surface (included)

"x" designates color temperature:

- C (Cool White) 6000K
- N (Natural White) 4000K
- W (Warm White) 3000K

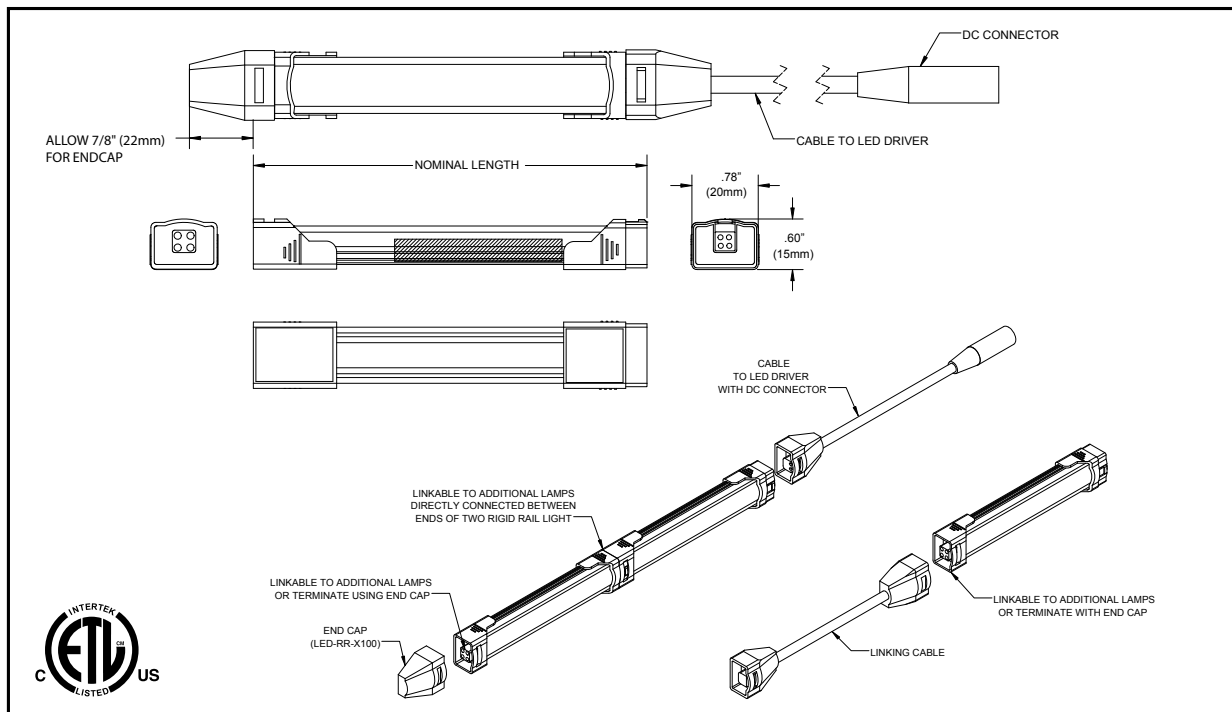




LED SURFACE MOUNT VAPOR-TIGHT BULB TYPE LIGHT FIXTURES FOR COOLER/FREEZER APPLICATIONS

- Designed for use with removable LED lamps
- Resilient, one-piece silicone gasket rated IP-65 for damp & wet locations
- Superior highly-polished aluminum reflector improves light output
- Low profile design
- Corrosion-free, high impact polycarbonate housing
- Clear, high impact polycarbonate lens with ribs for maximum light dispersion
- Supplied with NEC-approved luminaire disconnects
- Provided with stainless steel mounting hardware and European Type PG-16 conduit connector
- Bulb life rated 50,000 + hours
- Operating temperature range -13°F to 104°F (-25°C to 40°C)

MODEL NO.	LED LIGHT-COMplete	RATED VOLTAGE	AMPS	WATTS	COLOR	INITIAL LUMENS	KELVINS	REPLACEMENT LAMP
4 FOOT LED LIGHT FIXTURE WITH (2) LAMPS								
LED48X62221N	48" (1219mm), (2) 22W LAMPS, 120V	120-240VAC	0.44	44	Natural White	3250	4000K - 4500K	LED-212122N

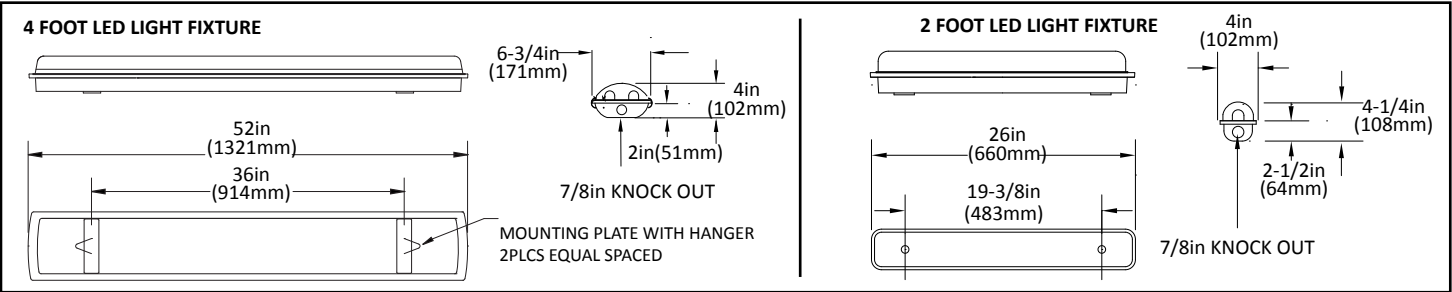

LED TUBULAR REPLACEMENT BULBS




MODEL NO.	DESCRIPTION
LED-212009C	9W Tubular LED Bulb, 2-Ft, Cool White, T9 Bi-Pin, 120V, 60Hz





4W LED TUBULAR FILAMENT APPLIANCE BULB WITH E17 INTERMEDIATE BASE

- Lumens comparable to 40W incandescent bulb • Operating temperature: -4°F to 140°F • Clear glass lens • For use in dry or damp locations
- Warm white color • 25,000 hour rated service life

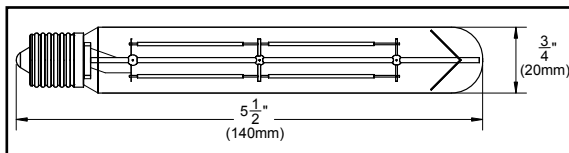

MODEL NO.	LENGTH	LUMENS	KELVINS	VAC
LED-TB40-T6-W	5-1/2"	435	2800	120
LED-TB40-T6A-W	(140mm)			230
LED-E26E17ADPT	Optional Adapter to Change to E26 Medium Base			

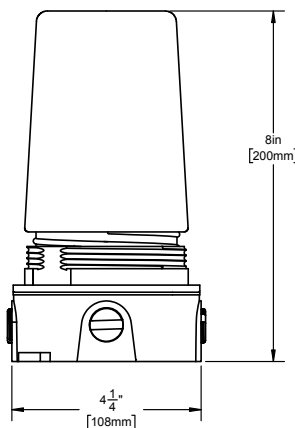


LED LIGHT FOR WALK-IN REFRIGERATION

- Replaces inefficient incandescent bulbs • 1100 lumens comparable to 75W incandescent bulb and uses 85% less energy • Simply screw in to existing fixture – no adapter required • Fits any A19/E26/E27 fixture • Suitable for damp locations • 120° beam angle floods interior with light • Mercury-free • Rated for 50,000 hour life • Instant on - no ballast to warm up • No buzzing or flickering • Impact resistant polycarbonate globe • 120-277VAC 50/60HZ • 100mA

MODEL NO.	WATTS	LUMENS	KELVINS	OPERATING TEMP	DESCRIPTION
VXS-LEDN10PC	10	1100	5000	-4°F to 105°F (-20°C to 41°C)	Complete Fixture with Bulb and Globe

LED APPLIANCE BULB AND FIXTURE FOR REACH-IN REFRIGERATOR APPLICATIONS

- Replaces inefficient incandescent bulbs • 800 lumens (comparable to 60W incandescent) • 1100 lumens (comparable to 75W incandescent) • Simply screw in to existing fixture – no adapter required • Fits any A19/E26/E27 fixture • Suitable for damp locations • 120° beam angle floods interior with light • Mercury-free
- Rated for 50,000 hour life • Instant on - no ballast to warm up • No buzzing or flickering • Impact resistant polycarbonate lens • 100-277VAC 50/60HZ
- 100mA • Operating Temperature: -4°F (-20°C) to 105°F (41°C)

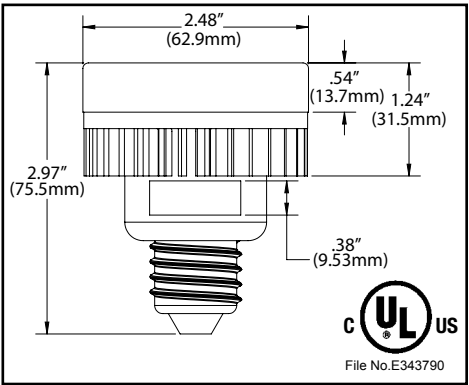

MODEL NO.	WATTS	LUMENS	COLOR TEMP	COLOR RENDERING INDEX
LED-PK100DD-C	10	800	Cool White 6500	Ra>80
LED-PK100DD-N		1100	Natural White 5000	



MODEL NO.	DESCRIPTION
L20-1010-CL	Fixture Only with Clear Globe
L20-1010-N	Fixture Only with Milky Globe
L20-1010-L07C	Fixture with Cool White Bulb and Milky Globe



VX SERIES SURFACE MOUNT INCANDESCENT REFRIGERATION LIGHTING FIXTURE

• Suitable for damp locations • Enclosed and gasketed

UL MODEL NO.	CSA MODEL NO.	DESCRIPTION
VXS-100-GL (NSF LISTED)	VXS-CSA-GL	Furnished w/ Glass Globe
VXS-100-PX (NSF LISTED)	VXS-CSA-PX	Furnished w/ Plastic Coated Glass Globe
VXS-100-PC (NSF LISTED)	VXS-CSA-PC	Furnished w/ Polycarbonate Globe
VXS-100-GL-WG	VXS-CSA-GL-WG	Furnished w/ Glass Globe and Wire Guard
VXS-100-PX-WG	VXS-CSA-PX-WG	Furnished w/ Plastic Coated Glass Globe and Wire Guard

SPECIFICATIONS

FIXTURE BODY:	Die cast aluminum
JUNCTION BOX:	Die cast aluminum
SOCKET:	Porcelain body with copper shell
WATTAGE:	Accepts standard 100 watt A19 bulb (not furnished)
VOLTAGE:	Rated up to 120 volts
GASKETS:	Cork and composition fiber
GLOBE:	Clear lime glass or clear plastic coated lime glass or clear impact resistant polycarbonate
WIRE GUARD:	Plated steel
CONDUIT ENTRY:	1/2" NPS (4) side openings and (1) top



D



VXS SERIES REPLACEMENT PARTS

REF.	MODEL NO.	DESCRIPTION
A	L10-X006	Globe, Clear Glass
B	L10-X007	Globe, Clear Plastic Coated Glass
C	L10-X008	Globe, Clear Polycarbonate
D	L10-X020	Wire Guard
E	L10-X026	Porcelain Socket Complete with Copper Shell
F	L10-Y005	Junction Box Complete with (4) 1/2" NPS Conduit Openings and Threaded Plugs
G	L10-Y010	Junction Box Assembly Complete with Lamp Housing
H	L10-Y016	Lamp Housing Complete with Porcelain Socket and Requires Gaskets



D




REFRIGERATION LIGHT FIXTURE

- Specifically designed for reach-in refrigerators and smartly styled
- Accommodates a 40W max incandescent bulb* or a 15W max LED bulb**

MODEL NO.	DESCRIPTION	REPLACEMENT GLOBE
L20-1010*	Complete Fixture with Clear Globe	L20-X004-CL
L20-1010-CL**	Complete Fixture with Clear Globe	L20-X004-CL
L20-1010-CSA*	Complete Fixture For CSA Applications	
L20-1010-N**	Complete Fixture with Milky Globe	L20-X004

Note: Bulb not included

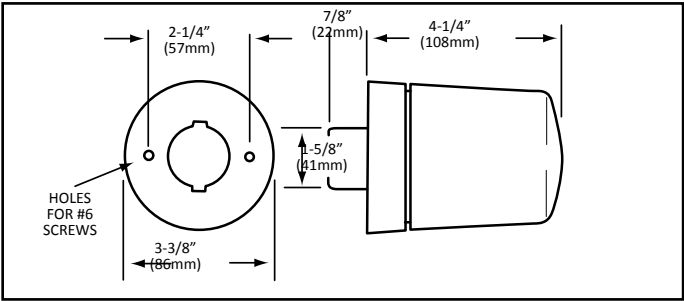

SPECIFICATIONS:

- HOUSING:** Die cast aluminum with #4 satin finish
- GLOBE:** Impact resistant clear polycarbonate
- SOCKET:** Porcelain (snap-in type) furnished with wire leads & ground 1/4" (6mm) spade terminals available upon request.
- Mtg. surface requires 1-3/4" (45mm) holes for back of lamp holder




Round Recessed Dimmable LED Down Light



ROUND RECESSED DIMMABLE LED DOWN LIGHT

- Energy efficient - saves up to 85% energy consumption as compared to a standard 100W incandescent light • May be wired with a dimmer switch to control ideal lighting conditions at the work surface • 50,000 hour service life – 50 times longer than a standard 100W incandescent bulb • Rated to a maximum operating temperature of 80°C (176°F) • Passivated aluminum heat sink effectively dissipates heat to prolong the life of the LEDs and on-board driver
 - Suitable for use in commercial cooking hoods • Suitable for use in wet or dry locations • Designed for easy installation
 - Furnished with tempered glass lens and stainless steel frame

MODEL NO.	COLOR TEMP	WATTS	LUMENS	SIZE
LED-L80-15DN	Natural	15	1350	6"
LED-L80-15DW	Warm		1250	
LED-L80-20DN	Natural	20	1800	8"
LED-L80-20DW	Warm		1700	

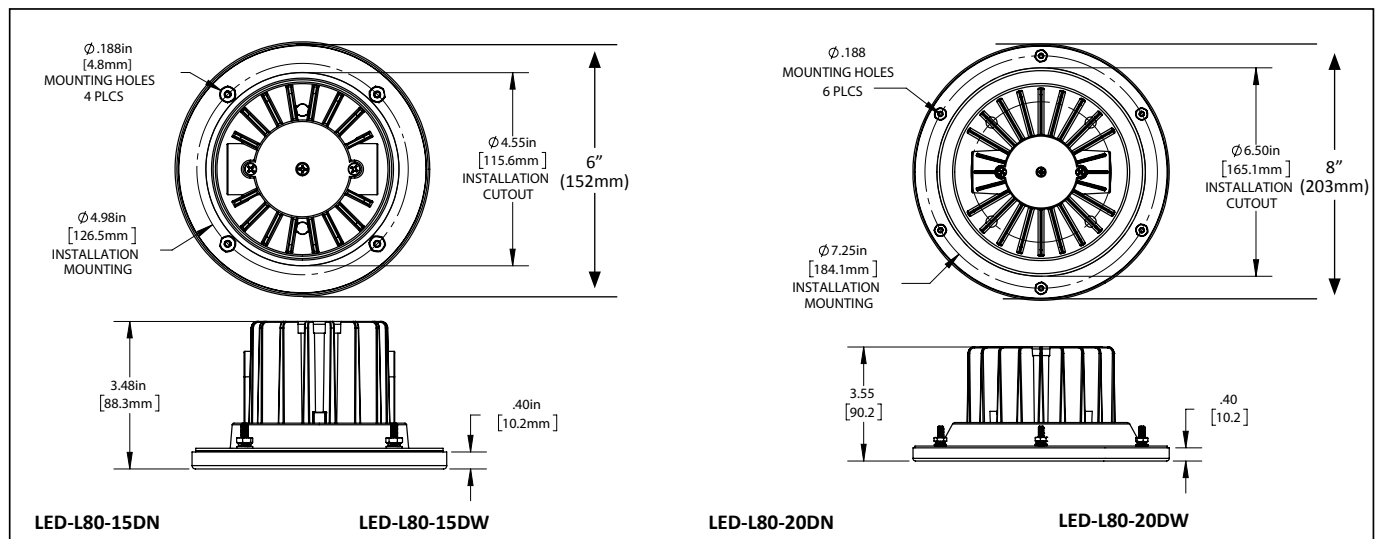

SPECIFICATIONS:

Wattage: 15W
 Voltage: 120 VAC, 60 Hz
 Amperage: 0.13A
 Initial Lumens: 1350
 Efficacy: 90 Lumens/Watt
 CRI: > 80
 Beam Angle: 97°
 Color Temp +/- 175: 3985
 Flammability Rating: VW-1(UL), FT1(CSA)
 Overall Size: 6" Dia. X 3.48" H
 Driver: Driver-on-Board, 15W
 Ports: 2 each (1/2"-14 NPT)
 Operating Temp Range: 32°F - 176°F (0°C - 80°C)
 Dimmable: 0-10 V Dimmer (not included)
 Lens Cover: Tempered Glass and Stainless Steel
 Warranty: 5 years



UL File# E339654

SPECIFICATIONS:

Wattage: 15W
 Voltage: 120 VAC, 60 Hz
 Amperage: 0.13A
 Initial Lumens: 1250
 Efficacy: 83 Lumens/Watt
 CRI: > 80
 Beam Angle: 95°
 Color Temp +/- 175: 3045
 Flammability Rating: VW-1(UL), FT1(CSA)
 Overall Size: 6" Dia. X 3.48" H
 Driver: Driver-on-Board, 15W
 Ports: 2 each (1/2"-14 NPT)
 Operating Temp Range: 32°F - 176°F (0°C - 80°C)
 Dimmable: 0-10 V Dimmer (not included)
 Lens Cover: Tempered Glass and Stainless Steel
 Warranty: 5 years



UL File# E339654

SPECIFICATIONS:

Wattage: 20W
 Voltage: 120 VAC, 60 Hz
 Amperage: 0.17A
 Initial Lumens: 1800
 Efficacy: 90 Lumens/Watt
 CRI: > 80
 Beam Angle: 106°
 Color Temp +/- 175: 3985
 Flammability Rating: VW-1(UL), FT1(CSA)
 Overall Size: 7.99" Dia. X 3.56" H
 Driver: Driver-on-Board, 20W
 Ports: 2 each (1/2"-14 NPT)
 Operating Temp Range: 32°F - 176°F (0°C - 80°C)
 Dimmable: 0-10 V Dimmer (not included)
 Lens Cover: Tempered Glass and Stainless Steel
 Warranty: 5 years



UL File# E339654

SPECIFICATIONS:

Wattage: 20W
 Voltage: 120 VAC, 60 Hz
 Amperage: 0.17A
 Initial Lumens: 1700
 Efficacy: 85 Lumens/Watt
 CRI: > 80
 Beam Angle: 106°
 Color Temp +/- 175: 3045
 Flammability Rating: VW-1(UL), FT1(CSA)
 Overall Size: 7.99" Dia. X 3.56" H
 Driver: Driver-on-Board, 20W
 Ports: 2 each (1/2"-14 NPT)
 Operating Temp Range: 32°F - 176°F (0°C - 80°C)
 Dimmable: 0-10 V Dimmer (not included)
 Lens Cover: Tempered Glass and Stainless Steel
 Warranty: 5 years




UL File# E339654

Recessed Mount LED Hood Lights

LED COMPLETE LIGHT FIXTURES AND RETRO-FIT KITS FOR EXHAUST KITCHEN HOODS


- Listed for up to 75°C (167°F) operation • 100 - 277VAC • Color Rendering Index > 80 • Meets all requirements of NFPA 96 and NEC 410
- LED lamps contain no mercury or other hazardous materials • Contributes to LEED® energy use reduction credits • 50,000 hour lamp life
- Highest efficacy per watt (100 lumens/watt) available - Exceeds Federal Energy Act requirements • Instant on, no ballast to warm up
- No ultraviolet rays: Does not attract insects • Current: 0.25A @ 120VAC

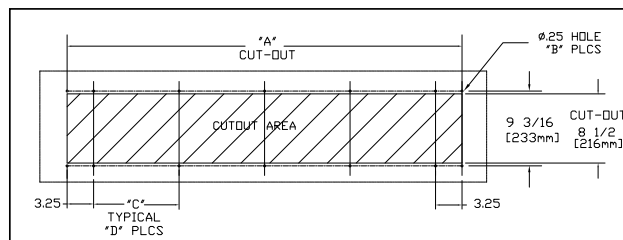

LED-L82 SERIES

- Listed for up to 75°C (167°F) operation • Highest efficacy (lumens/watt) available • Only 4-1/4" high for limited clearance applications
- Color Rendering Index > 80 • Instant on, no ballast to warm up • Recess mount installation • One piece satin finish stainless steel trim
- Tempered, prismatic glass diffuser • No ultraviolet rays • 50,000 hour service life • Low profile, only 4-1/4" high

MODEL NO.	COLOR TEMP	WATT	LUMENS/ WATT	KELVINS	TOTAL LIGHT OUTPUT	CURRENT	OVERALL TRIM SIZE	"A" CUT OUT	"B" HOLES	"C" SPACING	"D" EACH SIDE
LED-L82-1030-40N	Natural	43	>72	4000	4228	0.43-0.16A @	10-1/4" x 38-1/4" (260mm x 972mm)	36-1/2" (927mm)	14 total	7-1/2" (191mm)	4 places
LED-L82-1030-40W	Warm			3000	4135	100-277VAC					
LED-L82-1040-50N	Natural	53		4000	4925	0.53-0.19A @	10-1/4" x 50-1/4" (260mm x 61276mm)	48-1/2" (1232mm)		10-1/2" (267mm)	
LED-L82-1040-50W	Warm			3000	4877	100-277VAC					

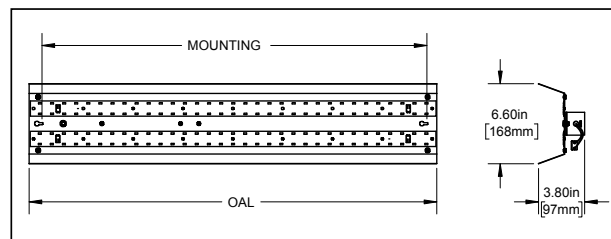

LED-L82 RETROFIT KITS

- Easily convert older L82 Series fluorescent or bulb-style LED fixtures to LED strip technology for improved performance and energy savings
- 100-277 VAC • 50/60Hz • Listed for up to 75°C (167°F) operation • 50,000 hour service life

MODEL NO.	COLOR TEMP	WATT	KELVINS	CURRENT	MOUNTING	OAL
LED-L82-RF1030-40N	Natural	43	4000	0.43-0.16A @	31.75" (807mm)	33.62" (854mm)
LED-L82-RF1030-40W	Warm		3000	100-277VAC		
LED-L82-RF1040-50N	Natural	53	4000	0.53-0.19A @	43.75" (1111mm)	45.62" (1159mm)
LED-L82-RF1040-50W	Warm		3000	100-277VAC		






LED-L87 SERIES

- Listed for up to 75°C (167°F) operation • Highest efficacy (96 lumens/watt) available • Instant on, no ballast to warm up
- Color Rendering Index > 80 • Recess mount installation
- Only 6" high for limited clearance applications • One piece satin finish stainless steel trim matches hood interior * 100-277 VAC
- Tempered, prismatic glass diffuser • 5 year warranty


MODEL NO.	MTG STUDS	COLOR TEMP	WATT	KELVINS	TOTAL LIGHT OUTPUT
LED-L87-1004-30N	4	Natural	30	4000	2880 Lumens
LED-L87-1008-30N	8				
LED-L87-1004-30W	4	Warm	30	3000	
LED-L87-1008-30W	8				

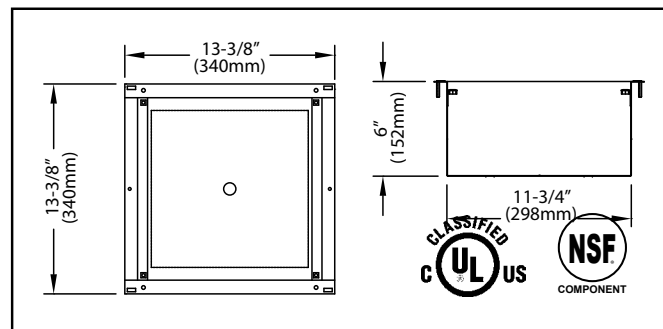


LED-L87 RETROFIT KITS

- Easily convert older L87 Series fluorescent or bulb-style LED fixtures to LED strip technology for improved performance and energy savings
- 109 lumens per watt • Listed up to 75°C operation • 100-277 VAC

MODEL NO.	MTG STUDS	COLOR TEMP	WATT	KELVINS	TOTAL LIGHT OUTPUT
LED-L87-1030N	4	Natural	30	4000	3800 Lumens
LED-L87-1030W		Warm		3000	

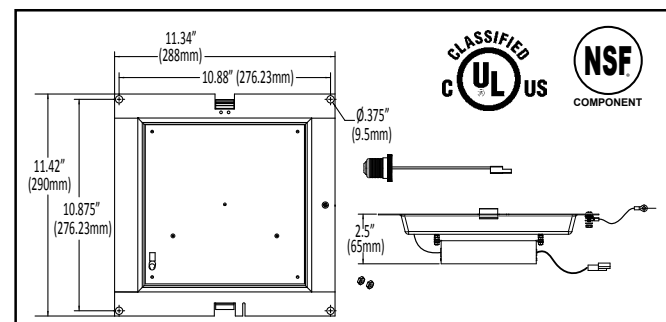

Recessed Mount Fluorescent/Incandescent Lights

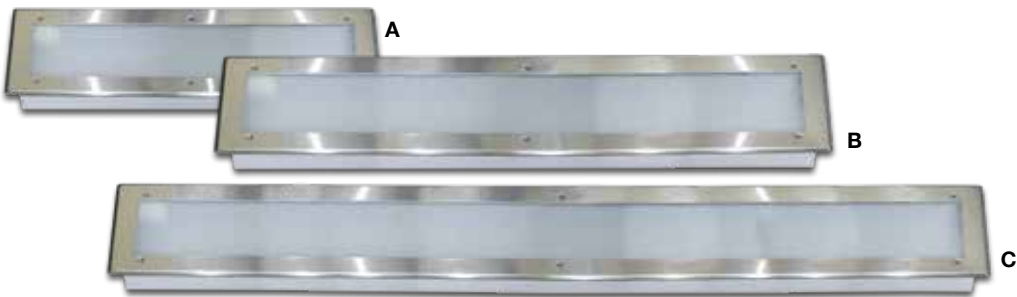

RECESSED FLUORESCENT KITCHEN EXHAUST HOOD LIGHT FIXTURES

- NSF Listed, UL Listed E250943 for use in commercial cooking hoods • Listed to 75°C (167°F)
- Meets all requirements for NFPA 96 and N.E.C. 410 • Only 4-1/2" (114mm) high for limited overhead clearance applications
- Tempered, prismatic glass diffuser with one piece satin finished stainless steel face frame to match hood interior

REF	MODEL NO.	LAMPS REQ'D	OVERALL TRIM SIZE	CUT-OUT SIZE	HOLES REQ'D	DIM. A
A	L82-1020	(2) F17T8	10-1/4" x 26-1/4" (260mm x 667mm)	8-1/2" x 24-1/2" (216mm x 622mm)	12	6" (152mm)
B	L82-1030	(2) F25T8	10-1/4" x 38-1/4" (260mm x 972mm)	8-1/2" x 36-1/2" (216mm x 927mm)	14	7-1/2" (191mm)
C	L82-1040	(2) F32T8	10-1/4" x 50-1/4" (260mm x 1276mm)	8-1/2" x 48-1/2" (216mm x 1232mm)	14	10-1/2" (267mm)

SPECIFICATIONS

BALLAST: Universal 120-277v, 50 or 60 Hz, T8, UL Listed

LAMPS: T8 Fluorescent lamps (not furnished)


BODY: Steel with baked white enamel finish

MOUNTING: #10-32 x 3/4" (19mm) long threaded studs

REFLECTOR: Baked white enamel finish... providing a minimum of 87% diffused reflection

DIFFUSER: Crystal 73 tempered prismatic glass with prisms on inside of fixture, mounted into a stainless steel face frame with special sealing gasketing. Secured to fixture body with stainless steel screws for easy servicing.

NOTE: Bulbs not included

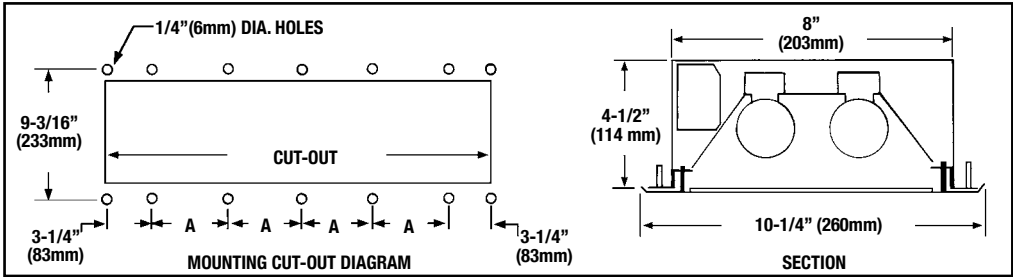


RECESSED INCANDESCENT KITCHEN EXHAUST HOOD LIGHT FIXTURE

- UL Listed E253411 and certified for Canada for use in commercial cooking hoods
- Meets all requirements for NFPA 96 and N.E.C. 410
- NSF Listed • Tempered, prismatic glass diffuser
- Satin finished stainless steel face frame to match hood interiors



MODEL NO.	OVERALL TRIM SIZE	CUT-OUT SIZE	HOLES REQ'D
L87-1004	13-7/8" Sq.	12" Sq.	4

NOTE: Bulbs not included

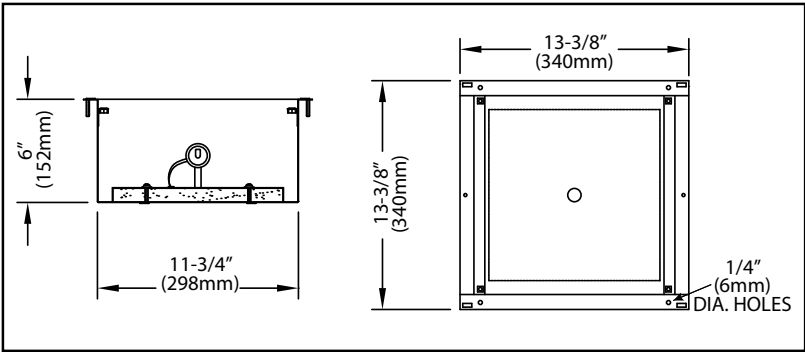

SPECIFICATIONS

SOCKET: Side mounted porcelain medium base

WATTAGE: Accepts standard A19/E26 Edison base bulb (not furnished)

VOLTAGE: Rated up to 120 Volts

DIFFUSER: Crystal 73 tempered prismatic glass with prisms on inside of fixture

FACEPLATE: One piece, stainless steel with smooth satin finish

LOCKUP: (4) captive stainless steel screws

RETAINER: Twin spring and cable for faceplate and frame

REFLECTOR: Die formed aluminum with satin finish

WIRING: Connections to socket are made in the interior removable thermal insulated wiring chamber

BODY: Steel recessed housing with baked white enamel finish

MOUNTING: (4) #10-24 x 3/4" (19mm) long threaded studs



LED LIGHT FOR KITCHEN EXHAUST HOODS

- UL Listed Edison-base LED bulb rated to 85°C (185°F)
- Improved design with internal switch to provide thermal protection
 - 120 degree beam angle floods the workspace with light
- 85 to 277 VAC • 50/60Hz • Exceeds Federal Energy Act requirement
- Impact resistant polycarbonate enclosure • 50,000 hour rated service life

DESIGN PATENT NUMBER D715,463 S

MODEL NO.	WATTS	LUMENS	KELVINS	MAX OPERATING TEMP*
LED-40000N-B				
LED-40000N-P**				
LED-40001N (includes globe)	12	960	4000 - 4500	85°C (185°F)
LED-40000W-B		930	2800 - 3000	

*Bulb performance is not guaranteed if exposed to temperatures above 85°C

**In blister pack for POS display

LED-40000 BULBS COMPLETE WITH L55 SERIES LIGHT FIXTURE

MODEL NO.	GLOBE	WATTS	LUMENS	KELVINS
L55-LEDN-1004	Coated Glass	12	960	4000
L55-LEDW-1004			930	2800
L55-LEDN-1024	Coated Glass, Wire Guard	12	960	4000
L55-LEDW-1024			930	2800
L55-LEDN-2004	Tempered Glass	12	960	4000
L55-LEDW-2004			930	2800
L55-LEDN-2024	Tempered Glass, Wire Guard	12	960	4000
L55-LEDW-2024			930	2800




RECESS MOUNT PERIMETER LED LIGHT FOR KITCHEN EXHAUST HOOD PLENUMS

- Satin chrome finish bezel matches hood • 50,000 hour rated lamp life
- 120° beam angle floods the workspace with light • 100 to 130 VAC
 - 50/60 Hz • Impact resistant polycarbonate lens

MODEL NO.	WATTS	LUMENS	KELVINS	TYPE	OPERATING TEMP
LED-PL35-W	4	290	3000	Non-Dimmable	-4°F to 104°F (-20°C to 40°C)

Cut-out size required - 2.75" (70mm)

Notes: Supplied with 48" (1220mm) 18AWG wires.

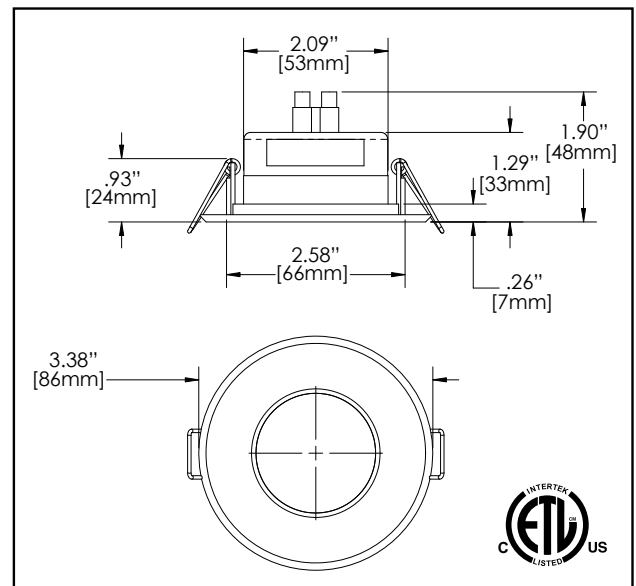



E-Z MOUNT INCANDESCENT KITCHEN EXHAUST HOOD LIGHTING FIXTURES

*"TUFF-SKIN" coating eliminates hot spot browning and discoloration of globe


- UL Listed to 80°C (176°F) • Prevents glass shatter from impact, dropping, unusual stresses and thermal shock
- Scratch resistant • U.S.D.A. approved • Improves light source by providing better diffusion
- E-Z Mount feature allows for quick installation • Permanently affixed gaskets cut installation time
- Meets all requirements for NFPA 96 and N.E.C. 410 • Greaseproof, waterproof and heatproof construction

MODEL NO.	DESCRIPTION
L55-1004	Furnished with TUFF-SKIN* Coating; Thermal and Shock Resistant Tempered Glass Globe
L55-1004-CSA	Furnished with TUFF-SKIN* Coating; Thermal and Shock Resistant Tempered Glass Globe; CSA Certified
L55-1004-HT	Furnished with TUFF-SKIN* Coating; Thermal and Shock Resistant Tempered Glass Globe; Lamp Holder Wires Rated to 392°F (200°C), 600V; Insulation: Silicone Rubber with Treated Glass Bead Sleeveing
L55-1024	Furnished with TUFF-SKIN* Coating; Thermal and Shock Resistant Tempered Glass Globe; Includes Wire Guard
L55-1024-CSA	Furnished with TUFF-SKIN* Coating; Thermal and Shock Resistant Tempered Glass Globe; CSA Certified; Includes Wire Guard
L55-1024-HT	Furnished with TUFF-SKIN* Coating; Thermal and Shock Resistant Tempered Glass Globe; Lamp Holder Wires Rated TO 392°F (200°C), 600V; Insulation: Silicone Rubber with Treated Glass Bead Sleeveing; Includes Wire Guard
L55-2004	Furnished with Thermal and Shock Resistant Tempered Glass Globe
L55-2004-CSA	Furnished with Thermal and Shock Resistant Tempered Glass Globe; CSA Certified
L55-2004-HT	Furnished with Thermal and Shock Resistant Tempered Glass Globe; Lamp Holder Wires Rated to 392°F (200°C), 600V; Insulation: Silicone Rubber with Treated Glass Bead Sleeveing
L55-2024	Furnished with Thermal and Shock Resistant Tempered Glass Globe; Includes Wire Guard
L55-2024-CSA	Furnished with Thermal and Shock Resistant Tempered Glass Globe; CSA Certified; Includes Wire Guard
L55-2024-HT	Furnished with Thermal and Shock Resistant Tempered Glass Globe; Lamp Holder Wires Rated to 392°F (200°C), 600V; Insulation: Silicone Rubber with Treated Glass Bead Sleeveing; Includes Wire Guard

SPECIFICATIONS


- FIXTURE BODY:** Die cast aluminum with brushed finish
- SOCKET:** Porcelain body with copper shell
- WIRE LEADS:** Standard - 16 awg, 6" (152mm) long
Hi-temp - 14 awg, 9" (229mm) long
- GROUND LEAD:** 6" (152mm) long green colored 18 awg wire
- WATTAGE:** Accepts standard 100 watt A19 bulb (not furnished)
- VOLTAGE:** Rated up to 120 volts
- GASKETS:** Silicone
- OVERALL SIZE:** 5-3/8" (136mm) and 8-11/32" (212mm) long
- JUNCTION BOX:** Not furnished. Fixture is designed to accept any standard 3-1/2"(89mm) or 4"(102mm) junction box



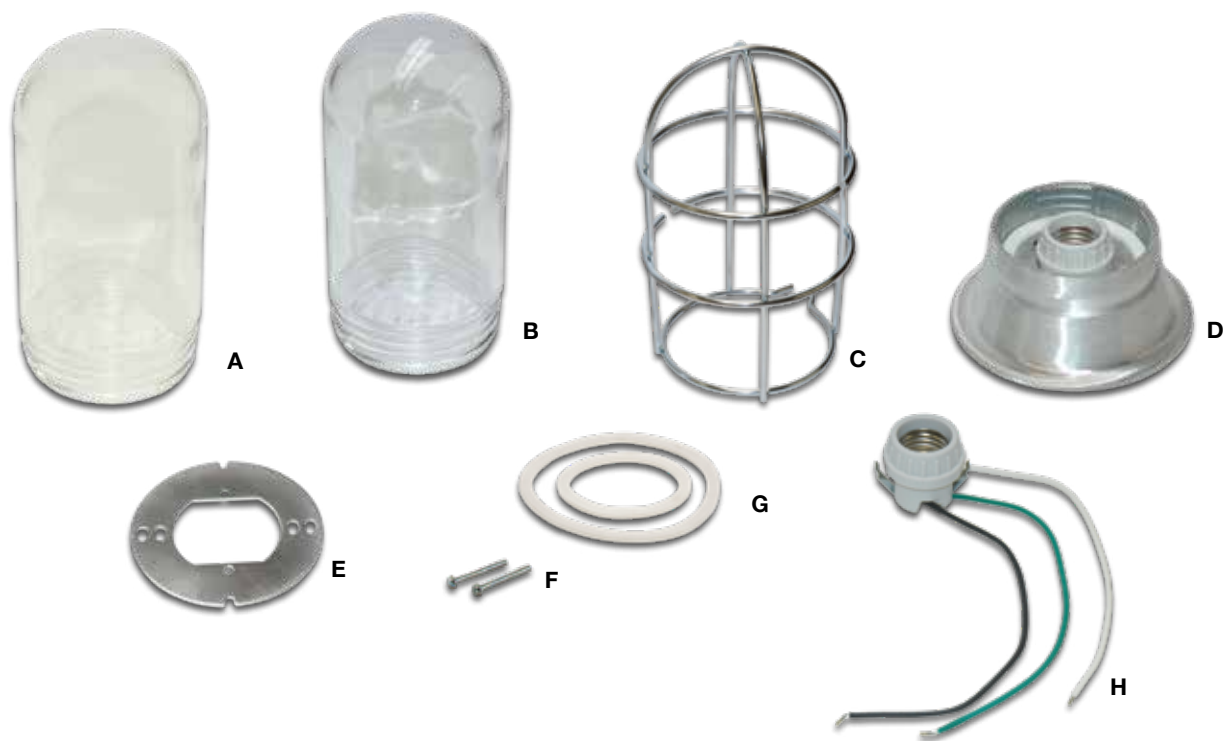

L55 SERIES REPLACEMENT PARTS

REF	MODEL NO.	DESCRIPTION
A	L50-X011	Globe, Furnished with TUFF-SKIN Coating; Thermal and Shock Resistant Tempered Glass
B	L55-X022	Globe, Furnished with Thermal and Shock Resistant Tempered Glass
C	L10-X020	Wire Guard, Zinc Plated Steel
D	L55-Y001	Lamp Housing Assembly; Includes Porcelain Socket and Required Silicone Gasket
	L55-Y001-CSA	Lamp Housing Assembly; Includes Porcelain Socket and Required Silicone Gasket; CSA Certified
	L55-Y001-HT	Lamp Housing Assembly; Includes Porcelain Socket and Required Silicone Gasket; Lamp Holder Wires Rated to 392°F (200°C), 600V; Wire Leads 14AWG, 9" (229mm) Long Stripped End. Insulation: Silicone Rubber with Treated Glass Bead Sleeving
E	L50-X009	Adapter Plate
F	L55-X006	Screw, #10-24 x 1-3/4" Long bRound Head
G	L50-Y001	Gasket Set, Silicone, White
H	L55-X003	Porcelain Socket, Snap-In with 3 Leads
	L55-X003-HT	Porcelain Socket; Wires Rated to 392°F (200°C), 600V; Wire Leads 14AWG, 9" (229mm) Long Stripped End. Insulation: Silicone Rubber with Treated Glass Bead Sleeving; Includes Wire Guard

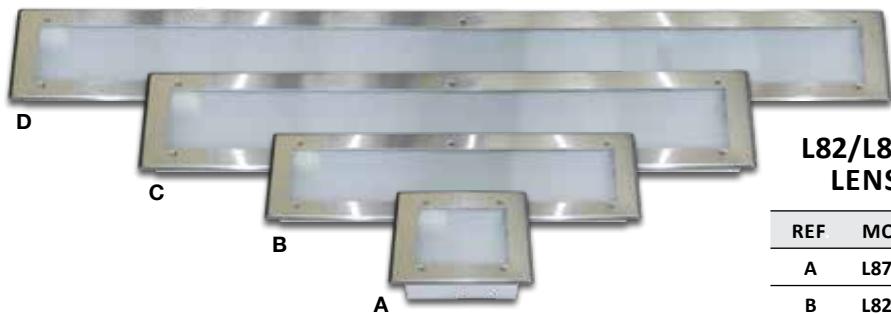

L82/L87 SERIES REPLACEMENT LENS/FRAME ASSEMBLIES

REF	MODEL NO.	DESCRIPTION
A	L87-Y001	12" Square Lens and Frame
B	L82-Y001	2' Lens and Frame
C	L82-Y002	3' Lens and Frame
D	L82-Y003	4' Lens and Frame



D



**CAST ALUMINUM
ELECTRIC OUTLET BOXES**

- Brushed satin finish * Provides convenient surface mounted outlet for countertop appliances • For 3/4" NPS or 1/2" NPS (adaptor provided) • Ground screw provided • U.L. Listed #48 C6


MODEL NO.	DESCRIPTION
R58-1010	Single Faced
R58-1020	Double Faced

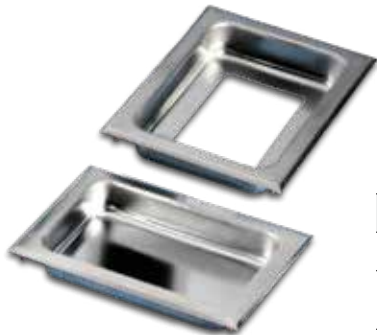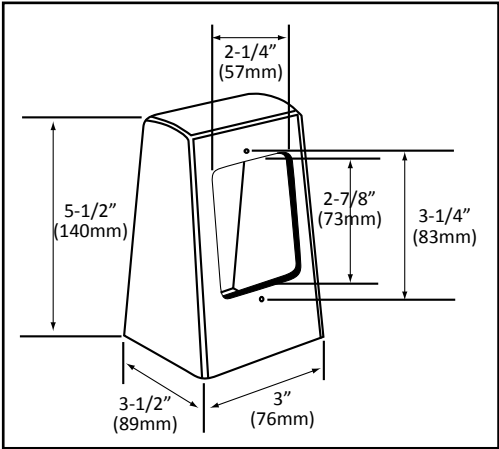

**STAINLESS STEEL
RECESSED HOUSINGS**

- Internal coved corners
- Provided with (4) 10-24 mounting studs
- Accepts standard J-box for tack welding
- 430 stainless steel construction


MODEL NO.	DESCRIPTION
R73-1210	For "J" Mounting Box
R73-1212	For Control Switch Application (without cutout)

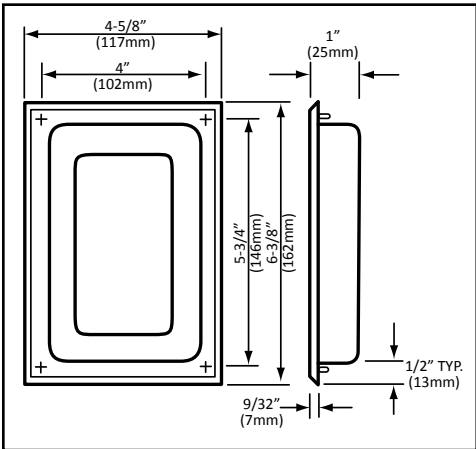

**STAINLESS STEEL
CONTROL PANELS**

- For recessed mounting of control knobs
- Satin finish • Three sizes available
- 430 stainless steel construction

MODEL NO.	"X" DIM.	"Y" DIM.
R73-2201	5" (127mm)	6" (152mm)
R73-2202	8-5/16" (211mm)	9-5/16" (236mm)
R73-2203	11-3/4" (298mm)	12-3/4" (324mm)

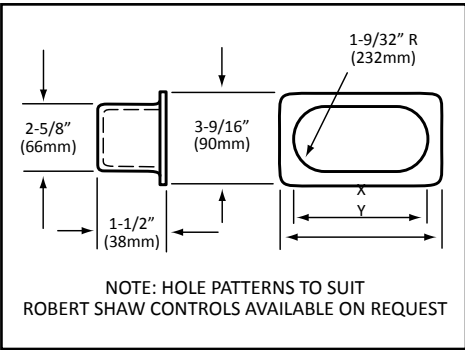




CONTACT SWITCHES

- Normally Closed (ON) Momentary Contact
- Ratings: .25 AMPS 250V, .75 AMPS 125V • General purpose, AC rated
- Single pole, single throw • Screw terminals

REF.	MODEL NO.	DESCRIPTION
A	R62-8406	Rocker Style with Bakelite Rocker Arm, Flush Mount
B	R61-8410	SPST Push Button Style with Backlite Plunger, Back Panel Mount

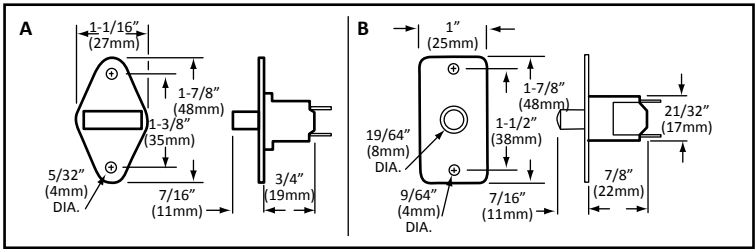

FLUSH DUPLEX RECEPTACLE

- 3 wire "U" ground 125 Volts
- 2 pole, 3 wire, self grounding • 125 VAC single phase • Brown finish • Back and side wire connections for #14 and #12 AWG

MODEL NO.	DESCRIPTION
R69-1630	15 Amps, 1.875kW



COVER PLATES

- 430 stainless steel construction
- Satin finish • 4-1/2" L x 2-3/4" W x 0.035" H
- Furnished with mounting hardware

MODEL NO.	DESCRIPTION
R71-0721	Duplex Receptacle Plate
R70-0720	Toggle Switch Plate
R70-0723	Blank Plate

EQUIPMENT LEGS



E


LEG SOCKETS & SHELF SUPPORTS	E113	STAINLESS STEEL EQUIPMENT LEGS	E123-E125
STAINLESS STEEL LEG SOCKETS	E114	STAINLESS STEEL EQUIPMENT LEGS FEATURE FULL 3" ADJUSTMENT	E126
FOOT INSERTS FOR ROUND TUBING	E115	EXTRA WIDE STAINLESS STEEL CLAD EQUIPMENT LEGS	E127
SEISMIC RESTRAINT & ENGINEERED PLASTIC ADJUSTABLE FOOT INSERTS	E116	S/S ONE PIECE LEG ADDEMBLIES WITH FULL 3" ADJUSTMENT	E128
ADJUSTABLE FOOT INSERT FEATURES FULL 3" ADJUSTMENT	E117	CUSTOM STAINLESS STEEL LEG ASSEMBLIES	E129
FOOT INSERTS FOR SQUARE TUBING	E118	APPLIANCE LEGS	E130-E133
FLANGED FOOT INSERTS FOR ROUND AND SQUARE TUBING	E119	ACCESSORIES	E134-E135
SECURITY/SEISMIC HEAVY-DUTY LEG ASSEMBLIES	E120		
ABS PLASTIC EQUIPMENT LEGS	E121		
ECONOMY ZINC DIE CAST EQUIPMENT LEGS	E122		



ZINC PLATED STEEL LEG SOCKETS

- STRAIGHT OR FLARED MODELS AVAILABLE
- LOCKING SET SCREW PROVIDED FOR SECURE ASSEMBLY
- PERMITS KD SHIPPING

REF.	MODEL NO.	HEIGHT	MATERIAL	APPLICATION
B	A26-0207-C	3" (76mm)	ZINC PLATED	1-5/8" (41mm) O.D. Tubing or
A	A28-0207-C	2-5/8" (66mm)	ZINC PLATED	1-1/4" (32mm) IPS Pipe

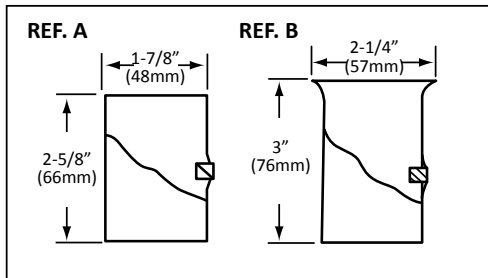


STAINLESS STEEL TUBULAR SHELF SUPPORTS

FOR 1-5/8" (41mm) O.D. TUBING

- LONG AND SHORT LENGTH MODELS AVAILABLE
- FURNISHED WITH LOCKING SET SCREWS
- CAN BE USED AS ADJUSTABLE POT RACK BAND SUPPORT



REF.	MODEL NO.	HEIGHT	APPLICATION
C	A24-0206-C	1-7/8" (48mm)	1-5/8" (41mm) O.D. Tubing
D	A24-0207-C	5-1/4" (133mm)	1-5/8" (41mm) O.D. Tubing

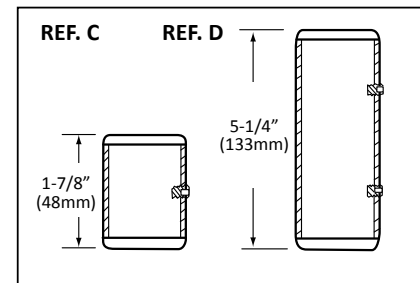


16 GAUGE ALL STAINLESS STEEL LEG SOCKET

- UNIQUE INTERIOR GEOMETRY TIGHTLY FITS THE DIAMETER OF THE LEG
- INCREASED SURFACE CONTACT IMPROVES STABILITY
- 2" OUTSIDE DIAMETER FOR 1-5/8" OD TUBING
- SATIN STAINLESS STEEL FINISH
- FLANGED TOP FOR EASE OF WELDING
- PERMITS KD SHIPPING TO REDUCE FREIGHT COSTS
- LOCKING SET SCREW ENSURES SECURE ASSEMBLY

MODEL NO. A19-1000


PATENT PENDING

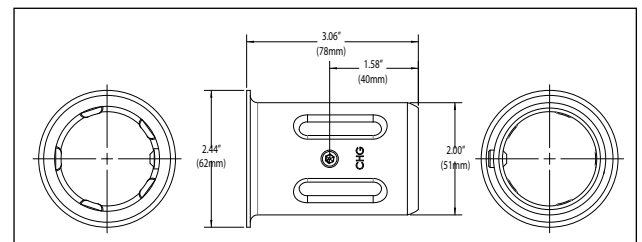

TYPE 304 STAINLESS STEEL TRIANGULAR MOUNTING PLATE

- 14-GA. THICK

MODEL NO. A18-0306-C

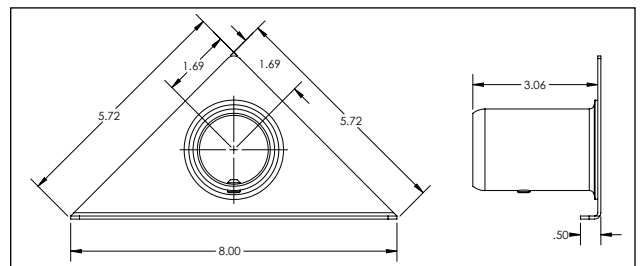

NSF STANDARDS GOVERNING THE USE OF SET SCREWS IN NON-FOOD ZONES REQUIRE THE PLUGGING OF THE HEX SOCKET HOLE AFTER FINAL ASSEMBLY AND TIGHTENING. THIS MAY BE ACCOMPLISHED BY APPLYING A HARDESINING TYPE SILICONE SEALANT OR THE USE OF A HOLE PLUG. ADDITIONAL 5/16-24 SET SCREWS ARE AVAILABLE. SPECIFY A18-X001 WHEN ORDERING.

Stainless Steel Leg Sockets




STAINLESS STEEL LEG SOCKETS

- FOR 1-1/2" & 1-5/8" O.D. LEG ASSEMBLIES
 - CONSTRUCTED OF 16 ga (1.5mm) STAINLESS STEEL TUBING
- PROVIDED WITH LOCKING SET SCREW TO ASSURE SECURE ASSEMBLY
- MODELS AVAILABLE WITH PLAIN OR FLARED TOP FOR WELD ON APPLICATIONS OR WELDED STAINLESS STEEL MOUNTING PLATES
- PERMITS KD SHIPPING TO REDUCE FREIGHT COSTS

REF.	MODEL NO.	HEIGHT	APPLICATION	DIA.
A	A16-0206-C	1-3/4" (44mm)		
C*	A18-0203-C	3-1/4" (82mm)		
B	A18-0206-C	3-1/16" (78mm)	1-5/8" (41mm)	
E	A18-0406-C	3-1/8" (79mm)	O.D. Tubing or	2" (51mm)
B**	A18-9900-C	3-1/16" (78mm)	1-1/4" I.P.S. Pipe	
D	A20-0206-C	3-1/2" (89mm)		
F	A20-0406-C	3-9/16" (90mm)		
G	A18-0202-C	2-7/16" (62mm)	1-1/2" (38mm)	1-3/4" (44mm)
E	A18-0402-C	2-1/2" (64mm)	O.D. Tubing	

*FURNISHED WITHOUT FLARED TOP **FURNISHED WITH 2 SET SCREWS.
MOUNTING PLATE HAS (4) 5/16"(8mm) DIA. HOLES ON 2-5/8" (66mm) CENTERS.

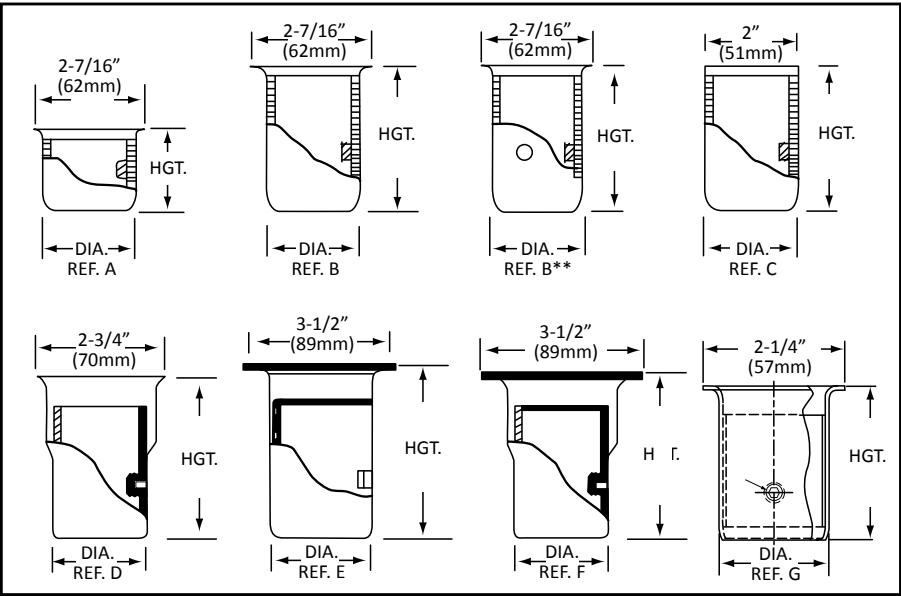

NICKEL PLATED STEEL HEX HEAD SET SCREW

REF. F MODEL NO. A18-X001
5/16-24 X 5/16"L

FOR USE WITH ALL COMPONENT HARDWARE BRAND LEG SOCKETS. ASSURES EQUIPMENT LEG IS SECURELY FASTENED TO LEG SOCKET.

NSF STANDARDS GOVERNING THE USE OF SET SCREWS IN NON-FOOD ZONES REQUIRES THE PLUGGING OF THE HEX SOCKET HOLE AFTER FINAL ASSEMBLY AND TIGHTENING. THIS MAY BE ACCOMPLISHED BY APPLYING A HARDENING TYPE SILICONE SEALANT OR THE USE OF A HOLE PLUG.

ADJUSTABLE FOOT INSERTS FOR ROUND TUBING



CONVENTIONAL ROUND & HEX ADJUSTABLE TOES FOR ROUND TUBING AND PIPE

AVAILABLE IN:

- NATURAL FINISH ZAMAK • NICKEL PLATED ZAMAK
- THERMOPLASTIC, GRAY OR BLACK • STAINLESS STEEL CLAD
- ADJUSTABLE TO LEVEL EQUIPMENT ON JOB SITE
- MOST TOES SUPPLIED WITH WRENCH FLATS FOR EASY ADJUSTMENT

REF.	MODEL NO.	FOOT DESCRIPTION	TYPE	HEIGHT	ADJ.	LOAD RATING	APPLICATION
A	A10-0221-C	Nickel Plated Zamak	HEX	11/16" (18mm)	13/16" (21mm)	1100 (500)	1" (25mm) O.D. Tubing 16 ga (1.5mm) & 18 ga (1.2mm)
A	A10-0421-C	Nickel Plated Zamak	HEX	3/4" (19mm)	1-1/8" (28mm)	1400 (635)	1-1/4" (32mm) O.D. Tubing 16 ga (1.5mm)
B	A10-0611-C	Nickel Finish Zamak	HEX	1-1/4" (32mm)	1-1/8" (28mm)	2000 (900)	1-1/2" (38mm) O.D. Tubing 16 ga (1.5mm) or 1-1/4" I.P.S. Pipe
B	A10-0651-C	Stainless Steel Clad	HEX	1-1/2" (38mm)	1-1/4" (32mm)	2000 (900)	
C	A10-0631-C	c	HEX	1-3/8" (35mm)	1-1/16" (27mm)	200 (90)	
D	A10-0641-C	Thermoplastic Gray	HEX	1-3/8" (35mm)	1-1/16" (27mm)	200 (90)	
E	A10-0811-C	Nickel Finish Zamak	HEX	1-1/4" (32mm)	1-1/8" (28mm)	2000 (900)	1-5/8" (41mm) O.D. Tubing 16 ga (1.5mm)
F*	A10-0851-C	Stainless Steel Clad	HEX	1-1/2" (38mm)	1-1/4" (32mm)	2000 (900)	
G	A10-0852-C	Stainless Steel Clad	ROUND	1-1/2" (38mm)	1-1/4" (32mm)	2000 (900)	
C	A10-0831-C	Nickel Plated Zamak	HEX	1-3/8" (35mm)	1-1/16" (27mm)	200 (90)	
D	A10-0841-C	Thermoplastic Gray	HEX	1-3/8" (35mm)	1-1/16" (27mm)	200 (90)	2" (52mm) O.D. Tubing 16 ga (1.5mm)
H	A11-0851-C	Stainless Steel Clad	HEX	1" (25mm)	2" (51mm)	2300 (1040)	


* SHOWN WITH OPTIONAL POSI-GRIP LOCKING RING



*OPTIONAL POSI-GRIP LOCKING RING

MODEL NO. A10-0010-C

SPRING STEEL WITH CLEATS THAT GRIP AND BITE TUBING TO LOCK FOOT TO TUBE.

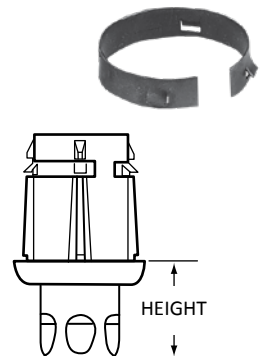

STAINLESS STEEL CLAD PLASTIC ADJUSTABLE FOOT INSERT

FOR 1-1/2" (38mm) AND 1-5/8" (41mm) ROUND TUBING




- STAINLESS STEEL CLAD TOE • ECONOMICAL • OFFERS A FULL 1-1/4" (32mm) ADJUSTMENT
- WRENCH FLATS AND UNIQUE THREADING OFFERS SMOOTH, FAST FIELD ADJUSTMENT
- EACH MODEL DESIGNED TO SUIT EITHER 16 ga (2mm) OR 18 ga (1mm) ROUND TUBING
- SPECIALLY DESIGNED ENGINEERED PLASTIC CONSTRUCTION WITHSTANDS TODAY'S HARSH CHEMICAL CLEANSERS IN COMMERCIAL KITCHEN ENVIRONMENTS



*OPTIONAL POSI-GRIP LOCKING RING

MODEL NO. A10-0010-C
SPRING STEEL WITH CLEATS
THAT GRIP AND BITE TUBING
TO LOCK FOOT TO TUBE.

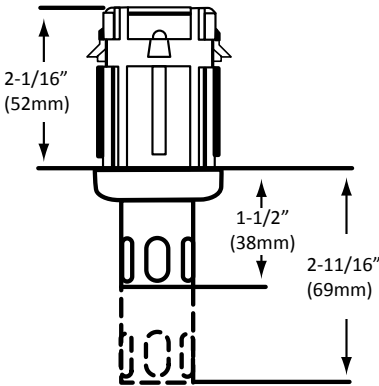

MODEL NO.	APPLICATION	TYPE	HEIGHT	ADJ.	LOAD RATING
A10-1000	1-5/8" (41mm) O.D Tubing 16 ga (1.5mm) & 18 ga (1.2mm)	HEX	1-1/2" (38mm)	1-1/4" (32mm)	1000 lbs (450 kg)
A10-1500	1-1/2" (38mm) O.D Tubing 16 ga (1.5mm) & 18 ga (1.2mm)	HEX	1-1/2" (38mm)	1-1/4" (32mm)	1000 lbs (450 kg)

ADJUSTABLE SEISMIC RESTRAINT FOOT

MODEL NO. A10-0852-S




7/16" (.44mm)
DIA. OPENING

- 7/16" DIA. (.44mm) HOLE IN BOTTOM OF TOE TO PERMIT SECURE ANCHORING TO REBAR IN FLOOR
- MEETS SMACNA GUIDLINES FOR SEISMIC RESTRAINT OF EQUIPMENT FOR SHEAR ONLY
- STAINLESS STEEL CLAD ZAMAK CONSTRUCTION WILL NOT CORRODE
- FOR 1-5/8" O.D. (41mm), 16 GAUGE (1.5mm) TUBING APPLICATIONS
- ADJUSTABLE ROUND TOE PERMITS 1-1/4" (32mm) HEIGHT ADJUSTMENT
- STATIC LOAD RATING TO 2000LBS (900kg)
- AVAILABLE WITH OPTIONAL POSI-GRIP LOCKING RING FOR ADDED PULL-OUT STRENGTH

*OPTIONAL POSI-GRIP LOCKING RING

MODEL NO. A10-0010-C
SPRING STEEL WITH CLEATS
THAT GRIP AND BITE TUBING
TO LOCK FOOT TO TUBE.



HI-RISE® ADJUSTABLE FOOT INSERTS




- FULL 3" (76mm) HEIGHT ADJUSTMENT
- RUGGED 2000 lbs STATIC LOAD RATING
- STAINLESS STEEL FLANGED MODELS AVAILABLE
 - IDEAL FOR LENGTHY CAFETERIA LINES AND COUNTERS WHERE FLOOR PITCH IS A CONCERN
 - ELIMINATES COSTLY FIELD MODIFICATION
- MAXIMUM HEIGHT ADJUSTMENT HELPS AVOID PLUMBING OBSTACLES AND OTHER UNFORESEEN CONDITIONS DURING INSTALLATION OF EQUIPMENT

Adjustable Foot Inserts, specified by Engineers and Consultants, are specifically designed to meet pending OSHA requirements which suggest maximum counter and table adjustments to permit comfortable working environments.

3" (76mm) ADJUSTABLE FOOT INSERT TO SUIT 1-5/8" (41mm) O.D. TUBING 16 ga (1.5mm)




MODEL NO.	DESCRIPTION	TYPE	HEIGHT	ADJ.	LOAD RATING
A10-0881-C	Stainless Steel	Hex	1-1/2" (38mm)	3" (76mm)	2000 lbs (900 kg)
A10-0884-C	S/S Flanged W/ (2) 11/32" (9mm) Dia. Mounting Holes	Flanged	1-1/2" (38mm)	3" (76mm)	2000 lbs (900 kg)

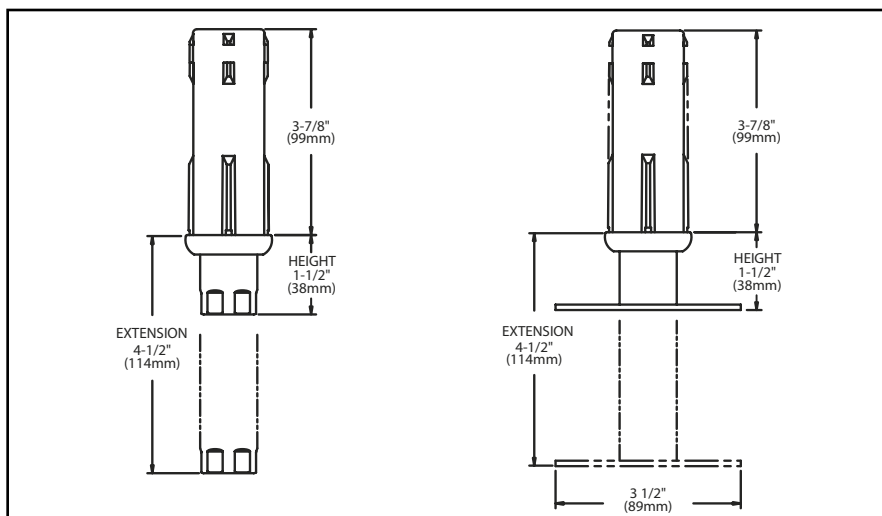


*OPTIONAL POSI-GRIP LOCKING RING

MODEL NO. A10-0010-C

SPRING STEEL WITH CLEATS
THAT GRIP AND BITE TUBING
TO LOCK FOOT TO TUBE.




ADJUSTABLE FOOT INSERTS
FOR SQUARE TUBING

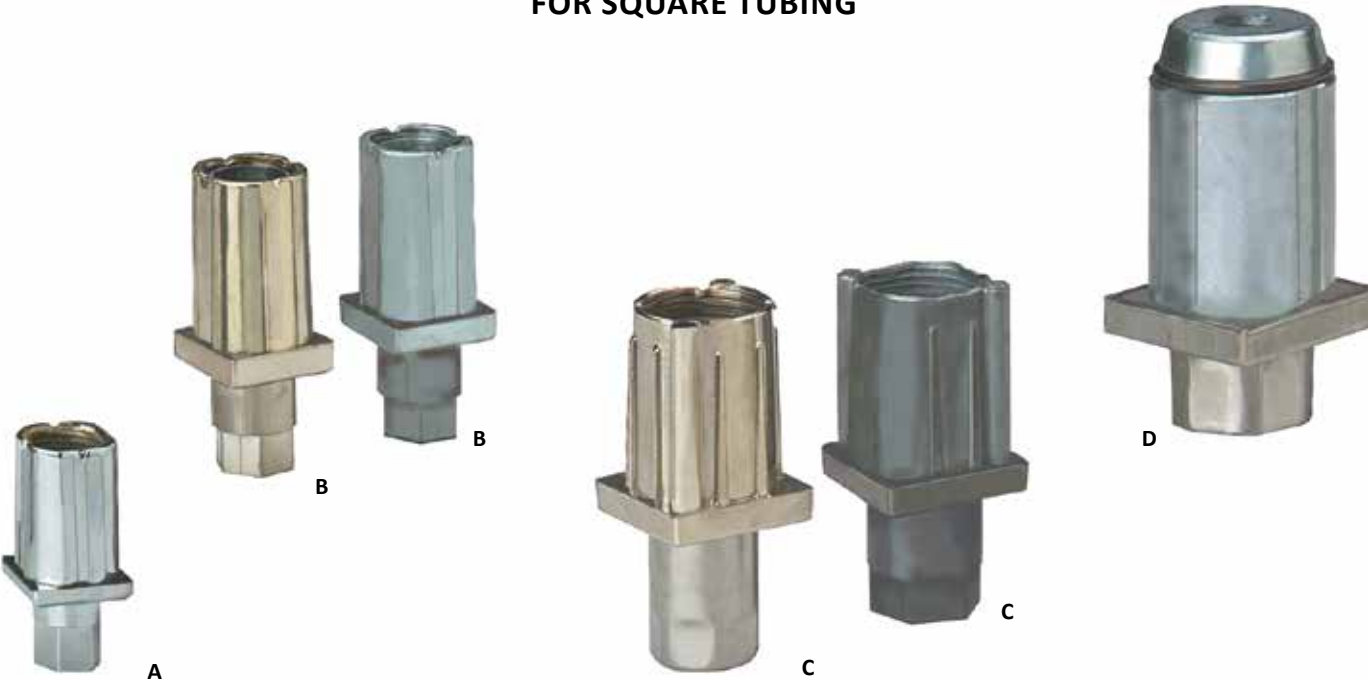

E



- AVAILABLE WITH ZINC, NICKEL OR STAINLESS STEEL CLAD FINISH
- ADJUSTABLE TO LEVEL EQUIPMENT ON JOB SITE
 - WRENCH FLATS FOR EASY ADJUSTMENT
- 2" (51mm) MODEL COMPLETE WITH RETAINING RING AND HEAVY-DUTY CONSTRUCTION




REF.	MODEL NO.	FOOT DESCRIPTION	TYPE	HEIGHT	ADJ.	LOAD RATING	APPLICATION
A	A14-0221-C	Nickel Plated Zamak	HEX	11/16" (18mm)	7/8" (22mm)	1200 (550)	1" (25mm) SQ. Tubing 16 ga (1.5mm) or 18 ga (1.2mm)
B	A14-0411-C	Natural Finish Zamak	HEX	1-1/4" (32mm)	1-1/8" (28mm)	2000 (900)	1-1/4" (32mm) SQ. Tubing 16 ga (1.5mm) or 18 ga (1.2mm)
	A14-0421-C	Nickel Plated Zamak	HEX	1-3/8" (35mm)	1" (25mm)	2000 (900)	1-1/2" (38mm) SQ. Tubing 16 ga (1.5mm) or 18 ga (1.2mm)
C	A14-0611-C	Natural Finish Zamak	HEX	1-1/4" (32mm)	1-1/8" (28mm)	2000 (900)	1-1/2" (38mm) SQ. Tubing 16 ga (1.5mm) or 18 ga (1.2mm)
	A14-0651-C	Stainless Steel Clad	HEX	1-1/2" (38mm)	1-1/8" (28mm)	2000 (900)	2" (51mm) SQ. Tubing 16 ga (1.5mm)
D	A15-0851-C	Stainless Steel Clad	HEX	1" (25mm)	2" (51mm)	2300 (1040)	

FLANGED ADJUSTABLE FOOT INSERTS FOR ROUND OR SQUARE TUBING OR PIPE



- AVAILABLE WITH STAINLESS STEEL CLAD OR NICKEL PLATED FINISH
- AVAILABLE WITH OR WITHOUT MOUNTING HOLES
- ADJUSTABLE TO LEVEL EQUIPMENT ON JOB SITE
- REDUCED FLANGE MODELS AVAILABLE



E

REF.	MODEL NO.	FLANGE DESCRIPTION	HEIGHT	ADJ.	LOAD RATING Lbs/Ft (Kg/mm)	APPLICATION
A	A14-0224-C	1-3/16"(30mm) Dia. Nickel Plated Zamak	3/4" (17.5mm)	1/2" (12mm)	1200 (550)	1"(25mm) Square Tubing 16 ga (1.5mm) & 18 ga (1.2mm)
B	A14-0424-C	2-1/8" (54mm) Nickel Plated Zamak	1-3/8" (35mm)	1" (25mm)	2000 (900)	1-1/4"(32mm) Square Tubing 16 ga (1.5mm) OR 18 ga (1.2mm)
D*	A10-0654-C	3-1/2"(89mm) Dia. S/S With Mountin Holes**	1-1/2" (38mm)	1-1/8" (28mm)	2000 (900)	1-1/4" I.P.S. Pipe Or 1-1/2"(38mm) O.D. Round Tubing 16 ga (1.5mm)
C*	A14-0653-C	3-1/2"(89mm) Dia. S/S No Mounting Holes	1-1/2" (38mm)	1-1/8" (28mm)	2000 (900)	1-1/2"(38mm) Square Tubing 16 ga (1.5mm) Or 18 ga (1.2mm)
C*	A14-0654-C	3-1/2"(89mm) DIA. S/S With Mountin Holes**	1-1/2" (38mm)	1-1/8" (28mm)	2000 (900)	
E	A10-9904-C	2"(50mm) Dia. S/S No Mounting Holes	1-1/2" (38mm))	1-1/8" (28mm))	2000 (900)	1-5/8"(41mm) O.D. Round Tubing For Marine Application 16 ga (1.5mm)
D*	A10-0853-C	3-1/2"(89mm) Dia. S/S No Mounting Holes	1-1/2" (38mm)	1-1/8" (28mm)	2000 (900)	1-5/8"(41mm) O.D. Round Tubing 16 ga (1.5mm)
D*	A10-0854-C	3-1/2"(89mm) Dia. S/S With Mountin Holes**	1-1/2" (38mm)	1-1/8" (28mm)	2000 (900)	
F*	A11-0854-C	3-1/2"(89mm) Dia. S/S With Mountin Holes**	1" (25mm)	2" (51mm)	2300 (1040)	2"(51mm) O.D. Round Tubing 16 ga (1.5mm)
G*	A15-0854-C	3-1/2"(89mm) Dia. S/S With Mountin Holes**	1" (25mm)	2" (51mm)	2300 (1040)	2"(51mm) Square Tubing 16 ga (1.5mm) Or 18 ga (1.2mm)

* Flanged Foot Models Have 12 GA. (2.6mm) Stainless Steel Flange With A #4 Satin Finish.

** Provided With (2) 11/32" (9mm) DIA. Mounting Holes, Spaced 2-1/2" (64mm) O.C.

NOTE: Ref. D and E furnished with optional posi-grip locking rings standard

SECURITY/SEISMIC
EQUIPMENT LEGS STAINLESS STEEL



- THREADED STEEL STUD OR WELDED MOUNTING PLATE PROVIDED FOR EASY MOUNTING OF LEGS TO EQUIPMENT
 - FOOT INSERTS ARE PROVIDED WITH A 3-1/2" (89mm) DIA. 11 ga (3mm) FLANGE
- ALL LEGS MAY BE FURNISHED TO MEET SPECIFIC REQUIREMENTS WITH SPECIAL STUDS AND/OR MOUNTING PLATES
- LEGS MAY BE FURNISHED IN SETS OF FOUR WITH CUSTOMER'S PART NUMBERS FOR KD SHIPPING
 - MOUNTING PLATE HAS (4) 5/16" (8mm) DIA. MOUNTING HOLES ON 2-5/8" CENTERS



FLOOR FASTENED • STAINLESS STEEL
SECURITY/SEISMIC EQUIPMENT LEGS

MODEL NO.	DESCRIPTION
A47-9932-C	1-5/8" (41mm) O.D. With Welded Mounting Plate
A50-9939-C	1-5/8" (41mm) O.D. With 1/2-13 Protruding Stud
A88-9902-C	2" (51mm) O.D. With Welded Mounting Plate
A90-9902-C	2" (51mm) O.D. With 3/4-10 Protruding Stud

Easily modified to meet SMACNA seismic restraint requirements. First, drill a 5/8" (16mm) diameter hole in flanged toe to accommodate anchored floor rod. Then, simply drill a 1/4" (6mm) diameter horizontal hole through toe portion which allows leg to be pinned to anchored rod. (Pin not furnished)

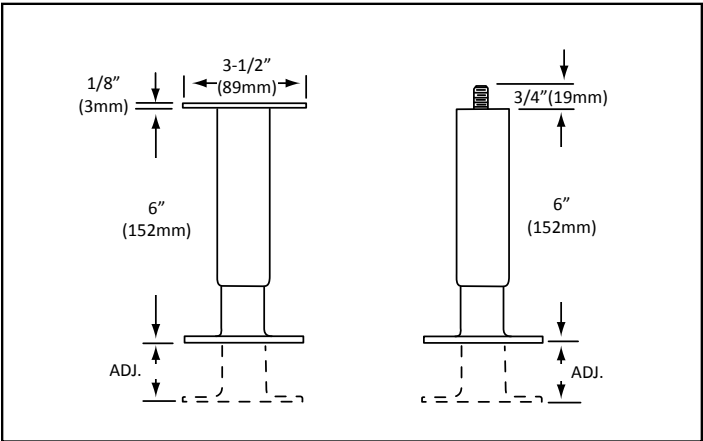

SPECIFICATIONS

MATERIAL: 1-5/8" (41mm) AND 2" (51mm) O.D. STAINLESS STEEL TUBING

FINISH: #4 SATIN FINISH

TOE ADJUSTMENT: LEGS ARE 6" (152mm) IN HEIGHT AND PROVIDE 1-1/2" (38mm) ADJUSTMENT


STATIC LOAD RATING: 2,000 lbs (900kg) PER LEG

Security/Seismic Equipment Legs are specifically designed for Marine, Prison and Institutional applications where installations require Secured Floor-Fastened Adjustable Legs on equipment that may be subjected to sudden movement or shifting. Equipment Legs are available in both 1-5/8" (41mm) and 2" (51mm) O.D. models with a protruding threaded stud or welded 3-1/2" (89mm) 11 gauge (3mm) square mounting plate. The 3-1/2" (89mm) dia. flanged foot has two 11/32" (9mm) dia. floor fastening holes on 2-1/2" (63mm) centers.


HIGH IMPACT ABS PLASTIC EQUIPMENT LEGS



FOR ICE MAKERS, REACH-INS, COMMERCIAL REFRIGERATORS, COUNTERS & COMMERCIAL CABINETS

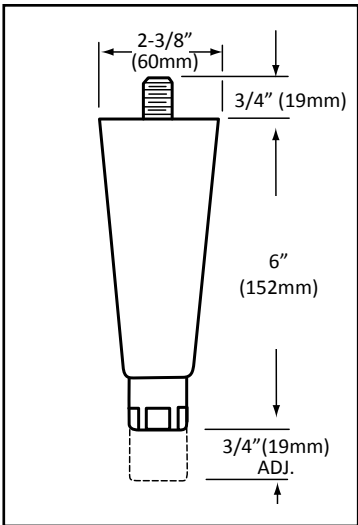

- 2000 lbs (900 kg) PER LEG STATIC LOAD RATING
 - BLACK MATTE FINISH
- TOUGH, DURABLE, HIGH IMPACT RESISTANT ABS PLASTIC BODY
- AVAILABLE WITH NON-REMOVABLE METAL TOE WITH NON-MARRING ABS PLASTIC BASE OR BLACK ABS NON-MARRING TOE
 - FULLY ADJUSTABLE TOE
- WRENCH FLATS ON TOE FOR EASY ADJUSTMENT
- 6" MINIMUM HEIGHT WITH ADJUSTABLE TOE
- CORROSION RESISTANT ZINC PLATING ON ALL STUDS

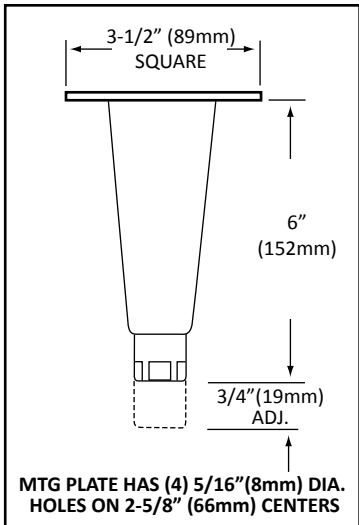

ABS PLASTIC EQUIPMENT LEGS

MODEL NO.	MOUNTING TYPE	LEG COLOR	FOOT TYPE
AP63-2003-C	1/2 - 13 Flush Stud With 3-1/2" Square Mounting Plate	Black	Black
AP61-4003-C	1/2 - 13 Protruding Stud	Black	Nickel Plated Zamak
AP62-4003-C	5/8 - 11 Protruding Stud	Black	Nickel Plated Zamak
AP63-4003-C	1/2 - 13 Flush Stud With 3-1/2" Square Mounting Plate	Black	Nickel Plated Zamak
AP64-4003-C*	1/2 - 13 Flush Stud With 2-1/2 x 3-5/8" Rectangular Non-Removable Mounting Plate	Black	Nickel Plated Zamak

* NON-STOCK ITEM - SEE PAGE E140 FOR MOUNTING PLATE DETAILS

SPECIFICATIONS

- FINISH:** BLACK MATTE FINISH
- TOE ADJUSTMENT:** LEGS ARE 6" (152mm) IN HEIGHT AND PROVIDE 3/4" (19mm) ADJUSTMENT
- STATIC LOAD RATING:** 2,000 lbs (900kg) PER LEG

ECONOLINE EQUIPMENT LEGS
DIE CAST ZAMAK

- THREADED STEEL STUD OR REMOVABLE MOUNTING PLATE PROVIDED FOR EASY MOUNTING OF LEGS TO EQUIPMENT
 - FOOT INSERTS ARE HEX SHAPED TO PERMIT QUICK HEIGHT ADJUSTMENT
- ALL LEGS MAY BE FURNISHED TO MEET SPECIFIC REQUIREMENTS WITH SPECIAL STUDS AND/OR MOUNTING PLATES
- LEGS MAY BE FURNISHED PACKAGED IN SETS OF FOUR WITH CUSTOMER'S PART NUMBER AS AN OPTION FOR KD SHIPPING




E



Available in finishes of...


- NICKEL, BLACK EPOXY, GRAY EPOXY
- DURABLE, CHIP-RESISTANT FINISH
- REMOVABLE MOUNTING PLATE or PROTRUDING STUD
- WRENCH FLATS ON TOE FOR EASY ADJUSTMENT

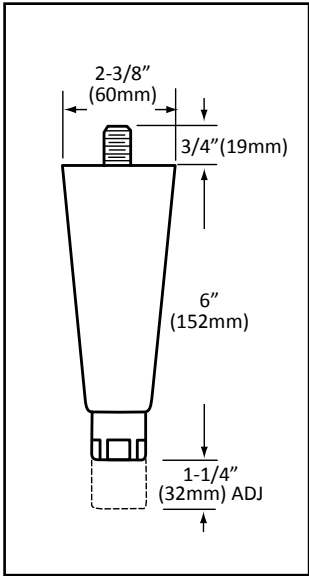

ECONOLINE DIE CAST EQUIPMENT LEGS

MODEL NO.	MOUNTING TYPE	LEG FINISH	FOOT TYPE
AE61-2003-C*		Black Epoxy	Hex
AE61-2104-C	Furnished With 1/2-13	Gray Epoxy	Hex
AE61-4002-C	Protruding Stud	Nickel	Hex
AE61-5002-C		Nickel	S/S Hex
AE62-4002-C	Furnished With 5/8-11	Nickel	Hex
AE62-2104-C	Protruding Stud	Gray Epoxy	Hex
AE62-5002-C		Nickel	S/S Hex
AE63-2003-C		Black Epoxy	Hex
AE63-4002-C	Furnished With 1/2-13 Flush Stud W/	Nickel	Hex
AE63-2104-C*	3-1/2" Square Removable Mounting Plate**	Gray Epoxy	Hex
AE63-5002-C		Nickel	S/S Hex

* NON-STOCK ITEM - SEE PAGE E140 FOR MOUNTING PLATE DETAILS

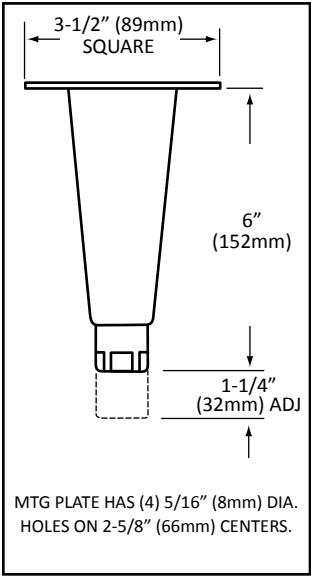


SPECIFICATIONS

- MATERIAL:** DIE CAST ZAMAK CONSTRUCTION
- TOE ADJUSTMENT:** LEGS ARE 6" (152mm) IN HEIGHT AND PROVIDE 1-1/4" (32mm) ADJUSTMENT
- STATIC LOAD RATING:** 2000 lbs (900 kg) PER LEG

HEAVY-DUTY STAINLESS STEEL EQUIPMENT LEGS

- THREADED STEEL STUD OR REMOVABLE MOUNTING PLATE PROVIDED FOR EASY MOUNTING OF LEGS TO EQUIPMENT
- ALL LEGS MAY BE FURNISHED TO MEET SPECIFIC REQUIREMENTS WITH SPECIAL STUDS AND /OR MOUNTING PLATES
- LEGS MAY BE FURNISHED PACKAGED IN SETS OF FOUR WITH CUSTOMER'S PART NUMBER FOR KD SHIPPING

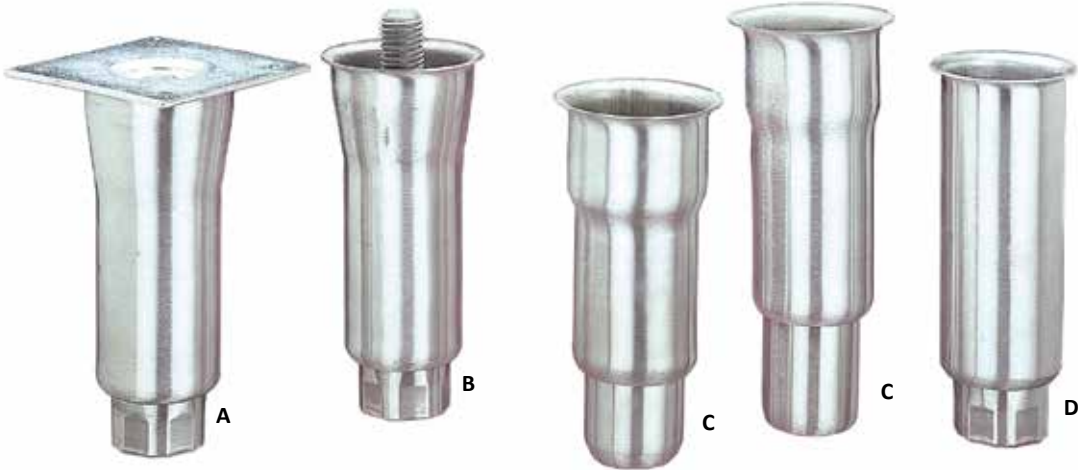

HEAVY-DUTY STAINLESS STEEL
2" (51mm) O.D.
EQUIPMENT LEGS

- TAPERED BODY with LARGE FLARED TOP
- REMOVABLE MOUNTING PLATE
- FLUSH or PROTRUDING MOUNTING STUD





HEAVY-DUTY STAINLESS STEEL
2" (51mm) O.D.
EQUIPMENT LEGS
for WELDED APPLICATIONS

- STEPPED SHAPE or STRAIGHT SHAPE with LARGE 2-3/8" (60mm) DIA. FLARED TOP

REF.	MODEL NO.	DESCRIPTION	FOOT	HEIGHT	ADJ.
A	A77-5048-C	Furn. With Removable Mounting Plate	Hex	6" (152mm)	1-3/4" (44mm)
NOT SHOWN	A78-5048-C	Furn. With 3/4"-10 Flush Stud	Hex	6" (152mm)	1-3/4" (44mm)
B	A79-5048-C	Furn. With 3/4"-10 Protruding Stud	Hex	6" (152mm)	1-3/4" (44mm)

REF.	MODEL NO.	DESCRIPTION	FOOT	HEIGHT	ADJ.
C	A72-0811	Stepped	Round	6" (152mm)	1-3/4" (44mm)
D	A52-9907-C	Straight	Hex	6" (152mm)	1-3/4" (44mm)

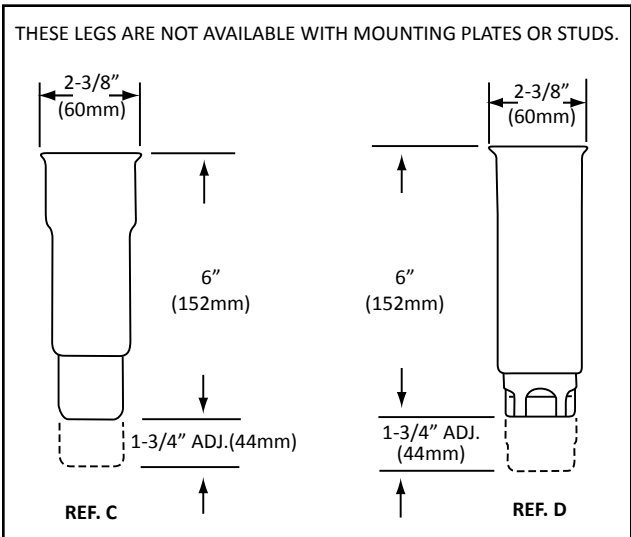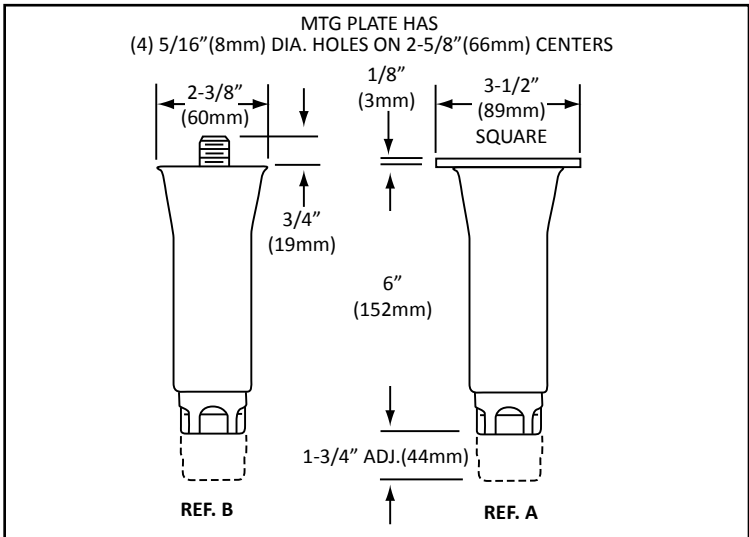

SPECIFICATIONS

MATERIAL: 2" (51mm) O.D. STAINLESS STEEL TUBING

FINISH: #4 FINISH

TOE ADJUSTMENT: LEGS ARE 6" (152mm) IN HEIGHT AND PROVIDE 1-3/4" (44mm) ADJUSTMENT

STATIC LOAD RATING: 2000 lbs (900 kg) PER LEG

HEAVY-DUTY STAINLESS STEEL EQUIPMENT LEGS

- THREADED STEEL STUD OR REMOVABLE MOUNTING PLATE PROVIDED FOR EASY MOUNTING OF LEGS TO EQUIPMENT
 - FOOT INSERTS ARE HEX SHAPED TO PERMIT QUICK HEIGHT ADJUSTMENT
- ALL LEGS MAY BE FURNISHED TO MEET SPECIFIC REQUIREMENTS WITH SPECIAL STUDS AND/OR MOUNTING PLATE
 - LEGS MAY BE FURNISHED PACKAGED IN SETS OF FOUR WITH CUSTOMER’S PART NUMBER FOR KD SHIPPING



HEAVY- DUTY STAINLESS STEEL
2" (51mm) O.D.
EQUIPMENT LEGS





HEAVY- DUTY STAINLESS STEEL
1-5/8" (41mm) O.D.
EQUIPMENT LEGS

REF.	MODEL NO.	DESCRIPTION	HEIGHT
A	A84-5048-C	W/ Removable Mounting Plate	6" (152mm)
B	A86-5048-C	W/ 3/4-10 Protruding Stud	6" (152mm)
C	A85-9706-C	W/ 5/8-11 Protruding Stud And Non-Marking Black Nylon Flanged Toe	6" (152mm)

REF.	MODEL NO.	DESCRIPTION	HEIGHT
D	A48-5032-C	W/ Removable Mounting Plate	4" (102mm)
	A48-5048-C	W/ Removable Mounting Plate	6" (152mm)
E	A50-9704-C	W/ 1/2-13 Protruding Stud & Non-Marking Black Nylon Flanged Toe	4" (102mm)
	A50-5032-C	W/ 1/2-13 Protruding Stud	4" (102mm)
F	A50-5048-C	W/ 1/2-13 Protruding Stud	6" (152mm)

MOUNTING PLATES HAVE (4) 5/16"(8mm) DIA. HOLES ON 2-5/8"(66mm) CENTERS.

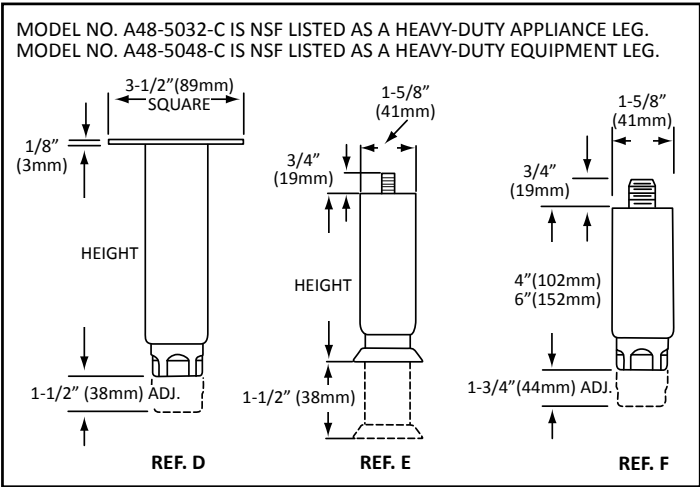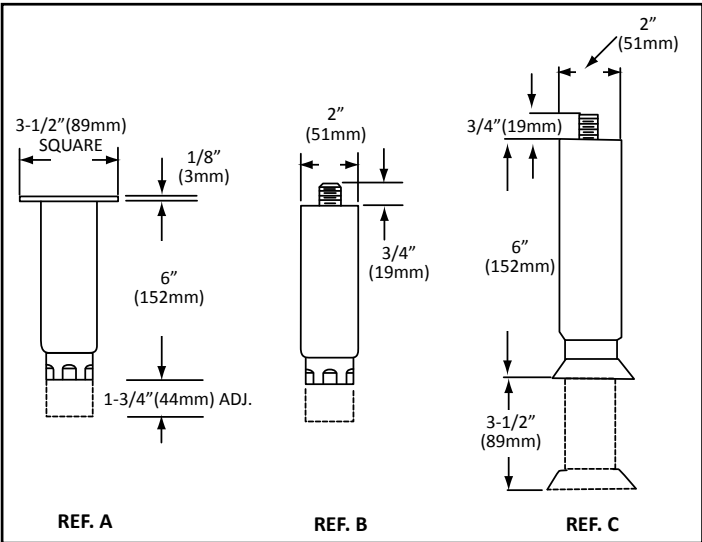

SPECIFICATIONS


MATERIAL: 1-5/8" (41mm) AND 2" (51mm) O.D. STAINLESS STEEL TUBING

FINISH: #4 FINISH

STATIC LOAD RATING: 2000 lbs (900 kg) PER LEG

HEAVY-DUTY STAINLESS STEEL EQUIPMENT LEGS

- 1-5/8" (41mm) AND 2" (51mm) DIAMETER MODELS AVAILABLE IN 6" (152mm) HEIGHT
 - SUPPLIED WITH 3-1/2" (89mm) SQUARE REMOVABLE MOUNTING PLATE
- BLACK THERMOPLASTIC GLIDE REDUCES SCRATCHING OF COUNTERTOPS AND PROVIDES A CONTEMPORARY LOOK
 - SATIN FINISH TO MATCH EQUIPMENT • 2000 lb (900 kg) STATIC LOAD RATING

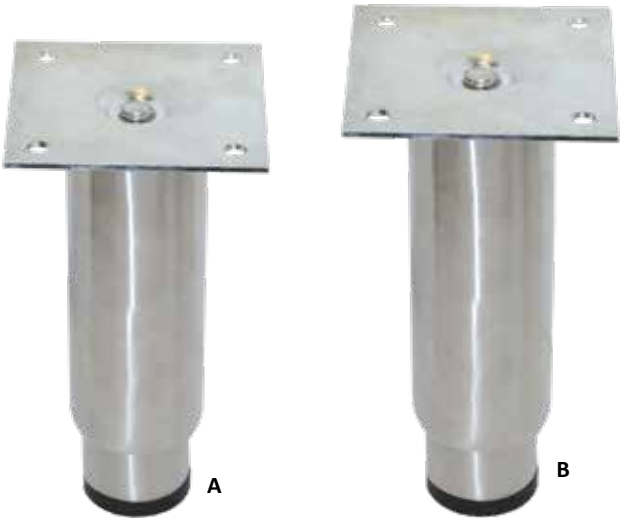



HEAVY- DUTY STAINLESS STEEL
1-5/8" (41mm) AND 2" (51mm) O.D. EQUIPMENT LEGS



E

REF.	MODEL NO.	DESCRIPTION	HEIGHT	O.D.
A	AB48-5048-C	W/ Removable 3-1/2" Square Mounting Plate	6" (152mm)	1-5/8" (42mm)
B	AB84-5048-C	W/ Removable 3-1/2" Square Mounting Plate	6" (152mm)	2" (51mm)

SEE PAGE E140 FOR MOUNTING PLATE DETAILS

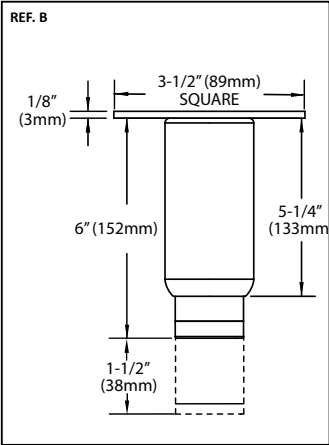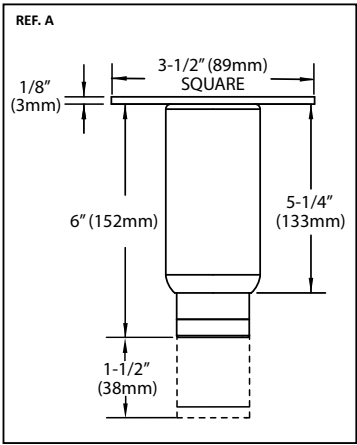

SPECIFICATIONS


- MATERIAL:** 1-5/8" (41mm) AND 2" (51mm) O.D. STAINLESS STEEL TUBING
- FINISH:** SATIN FINISH
- STATIC LOAD RATING:** 2000 lbs (900 kg) PER LEG

HEAVY-DUTY STAINLESS STEEL EQUIPMENT LEGS

- THREADED STEEL STUD, WELDED OR REMOVABLE MOUNTING PLATE PROVIDED FOR EASY MOUNTING OF LEGS TO EQUIPMENT
- ALL LEGS MAY BE FURNISHED TO MEET SPECIFIC REQUIREMENTS WITH SPECIAL STUDS AND/OR MOUNTING PLATES
- LEGS MAY BE FURNISHED PACKAGED IN SETS OF FOUR WITH CUSTOMER’S PART NUMBER FOR KD SHIPPING




E

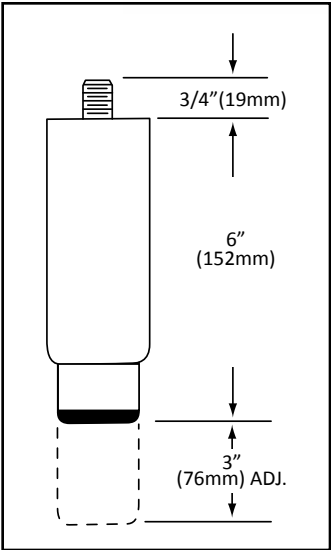

HEAVY-DUTY STAINLESS STEEL
2" (51mm) O.D.
EQUIPMENT LEGS
WITH FULL 3" (76mm) ADJUSTMENT

- NON-MARKING BLACK NYLON TOE
available with...
- REMOVABLE MOUNTING PLATE
- WELDED MOUNTING PLATE
- PROTRUDING STUD

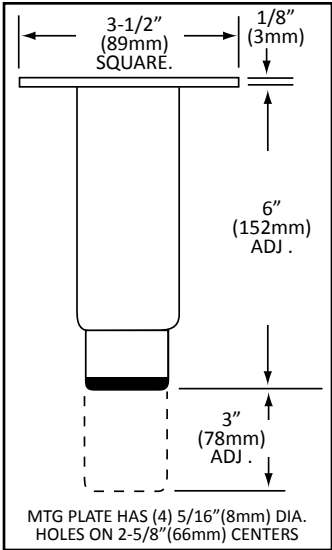

MODEL NO.	DESCRIPTION	HEIGHT
A92-8048-C	Furnished With Welded Mounting Plate	6" (152mm)
A93-8048-C	Furnished With Removable Mounting Plate	6" (152mm)
A95-8048-C	Furnished With 3/4-10 Protruding Stud	6" (152mm)

SPECIFICATIONS


- MATERIAL:** 2" (51mm) O.D. STAINLESS STEEL TUBING
- FINISH:** #4 SATIN FINISH
- TOE ADJUSTMENT:** LEGS ARE 6" (152mm) IN HEIGHT AND PROVIDE 3" (76mm) ADJUSTMENT
- STATIC LOAD RATING:** 2000 lbs (900 kg) PER LEG

CHROME PLATED EQUIPMENT LEG

MODEL NO. A99-9906-C



- ADJUSTABLE HEX FOOT IS STAINLESS STEEL CLAD
- MATCHES INDUSTRY STANDARD SPECIFICATION

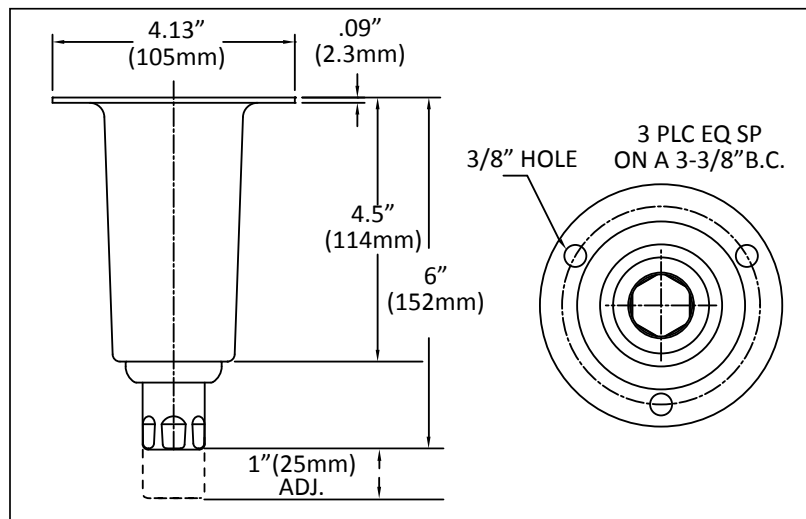

SPECIFICATIONS

MATERIAL: CHROME PLATED STEEL CONSTRUCTION

FINISH: POLISHED CHROME

TOE ADJUSTMENT: LEGS ARE 6" (152mm) IN HEIGHT AND PROVIDE 1" (25mm) ADJUSTMENT

STATIC LOAD RATING: 2000 lbs (900 kg) PER LEG

S/S One Piece Leg Assemblies With Full 3" Adjustment



STAINLESS STEEL LEG ASSEMBLIES



1-5/8" (41mm) O.D. STAINLESS STEEL LEG ASSEMBLIES FULL 3" ADJUSTMENT FEATURE FOR STANDARD APPLICATIONS

- ECONOMICAL... ELIMINATES CUTTING, DEBURRING, POLISHING AND WASTE
- FULL 3" (76 mm) ADJUSTMENT • INDUSTRY STANDARD SIZES SHIPPED FROM STOCK
- EASILY CUT TO CUSTOM LENGTHS IN FABRICATOR'S SHOP • PERMITS KD SHIPMENT
- STANDARD PACKAGING 25 PER CARTON
- ALL LEGS MAY BE FURNISHED PACKAGED IN SETS OF FOUR.
IDENTIFIED WITH CUSTOMER PART NUMBER AS AN OPTION FOR KD SHIPPING.

MODELS WITH PLAIN TOP ADJUSTABLE ROUND TOE

MODEL NO.	LEG DIA.	LENGTH	TOE TYPE
A46-6048-C	1-5/8" (41mm)	6" (152mm)	Round
A46-6080-C	1-5/8" (41mm)	10" (254mm)	Round
A46-6160-C	1-5/8" (41mm)	20" (508mm)	Round
A46-6272-C	1-5/8" (41mm)	34" (864mm)	Round
A46-6288-C	1-5/8" (41mm)	36" (914mm)	Round

MODELS WITH PLAIN TOP AND 3-1/2" (89mm) DIA. FLANGED TOE WITH 2 MOUNTING HOLES*

MODEL NO.	LEG DIA.	LENGTH	TOE TYPE
A46-4048-C	1-5/8" (41mm)	6" (152mm)	3-1/2" (89mm) Dia. S/S Flange
A46-4080-C	1-5/8" (41mm)	10" (254mm)	3-1/2" (89mm) Dia. S/S Flange
A46-4160-C	1-5/8" (41mm)	20" (508mm)	3-1/2" (89mm) Dia. S/S Flange
A46-4272-C	1-5/8" (41mm)	34" (864mm)	3-1/2" (89mm) Dia. S/S Flange
A46-4288-C	1-5/8" (41mm)	36" (914mm)	3-1/2" (89mm) Dia. S/S Flange

*NOTE: FLANGED FOOT MODELS HAVE 3-1/2" (89mm) O.D., 12 GA (2.6mm) STAINLESS STEEL FLANGE WITH A #4 SATIN FINISH, AND (2) 11/32" (9mm) DIA. MTG. HOLES SPACED 2-1/2" (64mm) O.C.

SPECIFICATIONS

- MATERIAL:** 1-5/8" (41mm) DIA., 16 ga (1.5mm) STAINLESS STEEL TUBING
FINISH: #4 SATIN FINISH
TOE ADJUSTMENT: 3" (76mm) MINIMUM
STATIC LOAD RATING: 2000 lbs (900 kg) PER LEG



STAINLESS STEEL
1-5/8" (41mm) & 2" (51mm) O.D.

LEG ASSEMBLIES FOR CUSTOM APPLICATIONS

- ALL LENGTHS FROM 4" (102mm) to 36" (914mm)
- CHOOSE FROM ARRAY OF OPTIONAL TOPS AND ADJUSTABLE TOES
- PERMITS KD SHIPMENT

SPECIFICATIONS

MATERIAL: 16 ga (1.5 mm) STAINLESS STEEL TUBING

FINISH: #4 SATIN FINISH

TOE ADJUSTMENT: 1-1/2" (40mm) MINIMUM

MOUNTING PLATES: 11 ga (3mm) PLATED STEEL, 3-1/2" (89mm) SQUARE WITH (4) 5/16" (8mm) DIA. HOLES SPACED ON 2-5/8" (66mm) CENTERS

STATIC LOAD RATING: 2,000 lbs PER LEG

NON-STOCK ITEMS... CALL FOR LEAD TIME
STANDARD PACKAGING...25 PER CARTON


ALL LEGS MAY BE FURNISHED PACKAGED IN SETS OF FOUR, IDENTIFIED WITH CUSTOMER PART NUMBER, ETC.

LEG ASSEMBLIES FOR CUSTOM APPLICATION

ORDERING INFORMATION FOR 1-5/8" (41mm) & 2" (51mm) O.D. LEG ASSEMBLIES					
FOR 1-5/8" (41 mm) O.D. LEG ASSEMBLIES USE PREFIX...A46 THRU A50 (SHOWN SHADED PURPLE ON CHART). FOR 2" (51 mm) O.D. LEG ASSEMBLIES USE PREFIX...A52 THRU A56.					
NSF COMPONENT	CUSTOM LEG TOPS AVAILABLE				
	PLAIN	WELDED PLATE	REMOVABLE PLATE	FLUSH 1/2-13 STUD	PROTRUDING 1/2-13 STUD
OPTIONAL TOES AVAILABLE					
FLANGED NO HOLES	A46-3____ A52-3____	A47-3____ A53-3____	A48-3____ A54-3____	A49-3____ A55-3____	A50-3____ A56-3____
	A46-4____ A52-4____	A47-4____ A53-4____	A48-4____ A54-4____	A49-4____ A55-4____	A50-4____ A56-4____
FLANGED WITH HOLES	A46-5____ A52-5____	A47-5____ A53-5____	A48-5____ A54-5____	A49-5____ A55-5____	A50-5____ A56-5____
	A46-6____ A52-6____	A47-6____ A53-6____	A48-6____ A54-6____	A49-6____ A55-6____	A50-6____ A56-6____
S/S/ HEX	A46-5____ A52-5____	A47-5____ A53-5____	A48-5____ A54-5____	A49-5____ A55-5____	A50-5____ A56-5____
S/S ROUND	A46-6____ A52-6____	A47-6____ A53-6____	A48-6____ A54-6____	A49-6____ A55-6____	A50-6____ A56-6____
ROUND FOOT INSERTS NOT AVAILABLE FOR 2" (51mm) DIA. LEG ASSEMBLIES					

TO ORDER: SIMPLY SPECIFY LEG TOP AND ADJUSTABLE TOE DESIRED TOGETHER WITH THE LENGTH IN INCHES REQUIRED.

EXAMPLE: 1-5/8" (41mm) O.D. WITH PLAIN TOP...SPECIFY A46 NYLON TIP...SPECIFY -2 24" (610mm) LENGTH...SPECIFY 24" (610mm).
THE PART NUMBERS IN THE CHART PROVIDE BLANKS TO ACCOMMODATE ANY LENGTH OF LEG BETWEEN 4" (102mm) AND 36" (914mm) IN 1/8" (3mm) INCREMENTS. COMPONENT HARDWARE WILL USE THESE BLANKS TO CONVERT YOUR INDIVIDUAL DESIGN AND LENGTH REQUIREMENT INTO ITS OWN PART NUMBER.

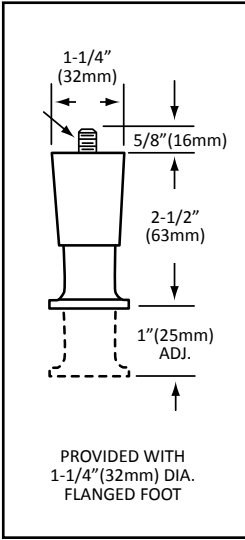

**2-1/2" (63mm) HIGH
ECONOMY SERIES
APPLIANCE LEGS**

- DIE CAST ZAMAK with NICKEL PLATED POLISHED FINISH
- FLANGE FOOT
- 2000 lbs (900 kg) STATIC LOAD CAPACITY PER LEG

**MODEL NO.
AE60-1453**




OPTIONAL NON-SKID FOOT PADS AVAILABLE
SPECIFY - MODEL NO. AE60-X010 FOR GREY SILICONE

**4" (102mm) HIGH
ECONOMY SERIES
APPLIANCE LEGS**

- DIE CAST ZAMAK with NICKEL PLATED MATTE FINISH
- FLANGE FOOT
- 2000 lbs (900 kg) STATIC LOAD CAPACITY PER LEG

**MODEL NO.
AE60-1653**

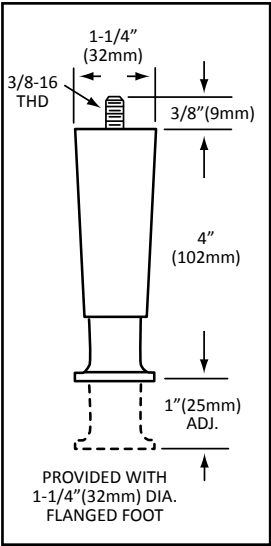


E



**4" (102mm) HIGH
EQUIPMENT LEG**

- NICKEL PLATED ZAMAK • 1-1/4" (32mm) ADJUSTMENT
- 1/2-13 x 1/2" MOUNTING STUD
- HEX TOE FOR EASY FIELD ADJUSTMENT
- SATIN FINISH
- STATIC LOAD CAPACITY 2000 lbs

MODEL NO.	FINISH	FOOT TYPE
AE41-4002-C	Satin Nickel	Hex

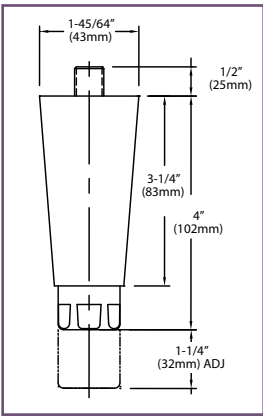

**HEAVY DUTY
S/S APPLIANCE LEG**

- 4" (102mm) HIGH • 1/2" (51mm) DIA. FLANGE WITH PLASTIC GLIDE
- CONTEMPORARY DESIGN • IDEAL FOR COFFEE MACHINES AND BEVERAGE DISPENSERS
- SATIN FINISH

MODEL NO. A99-9940-C






APPLIANCE LEGS

4" (102mm) HIGH APPLIANCE LEGS

- THERMOPLASTIC
BLACK, GRAY or CHROME PLATED

STATIC LOAD CAPACITY 200 lbs

REF.	MODEL NO.	FINISH	FOOT TYPE
A	A60-0631	Black	Hex
B	A60-0641	Gray	Dia
C	A60-0623	Chrome	Flange
D	A60-0633	Black	Flange

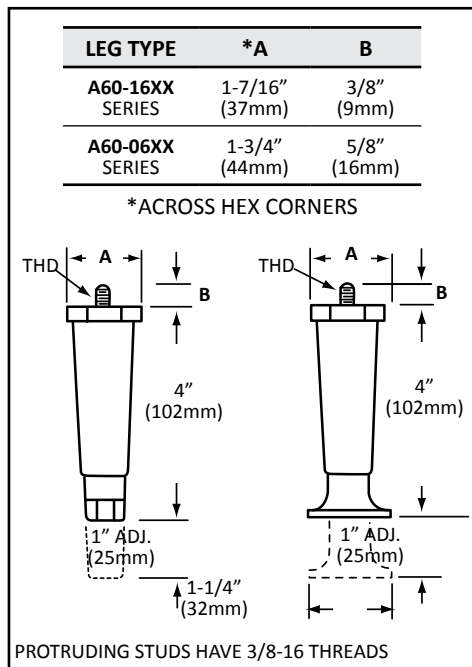

4" (102mm) HIGH APPLIANCE LEGS

- DIE CAST METAL with SATIN NICKEL FINISH

STATIC LOAD CAPACITY 250 lbs


REF.	MODEL NO.	FINISH	FOOT TYPE	STEM SIZE
E	A60-1651	Satin Nickel	Hex	3/8-16 x 5/8"L
F	A60-1653	Satin Nickel	Flange	3/8-16 x 5/8"L
F	A60-1653-SP1	Satin Nickel	Flange	1/4-20 x 3/8"L
F	A60-1653-SP2	Satin Nickel	Flange	5/16-18 x 1"L
F	A60-1653-SP3	Satin Nickel	Flange	5/16-18 x 1/2"L
F	A60-1653-SP4	Satin Nickel	Flange	5/16-18 x 5/8"L

2-1/2" (63mm) HIGH APPLIANCE LEGS


- THERMOPLASTIC BLACK or GRAY

STATIC LOAD CAPACITY 200 lbs

REF.	MODEL NO.	FINISH	FOOT TYPE
G	A60-0431	Black	Hex
H	A60-0441	Gray	Hex

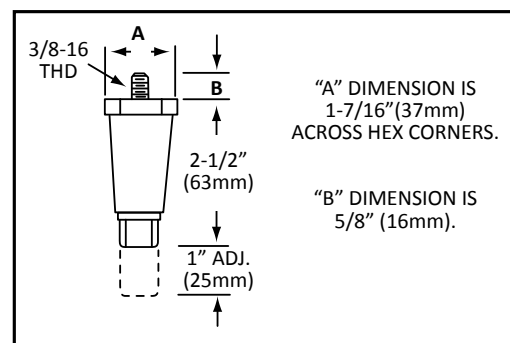

OPTIONAL NON-SKID PADS AVAILABLE: FOR A60 SERIES HEX TOE - SPECIFY MODEL NO. A60-X003
FOR A60 SERIES FLANGED TOE - SPECIFY MODEL NO. A60-X001

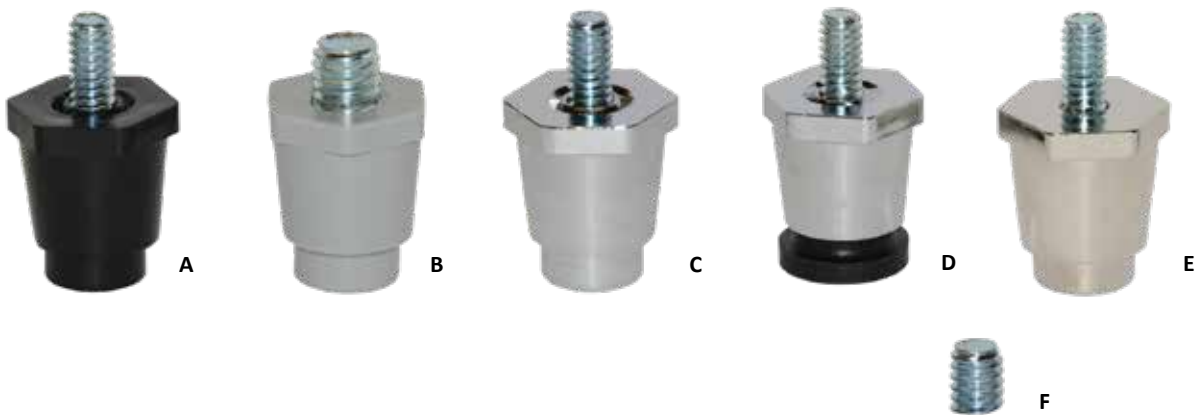

APPLIANCE LEGS




E

1" (25mm) HIGH
THERMOPLASTIC APPLIANCE LEGS
STATIC LOAD CAPACITY 100 lbs

REF.	MODEL NO.	FINISH	FOOT TYPE
A	A60-2205	Black	Round
B	A60-2210*	Gray	Round
C	A60-2305	Chrome	Round
D	A60-2405	Chrome	Black Rubber Flange

*FURNISHED WITH 3/8 - 16

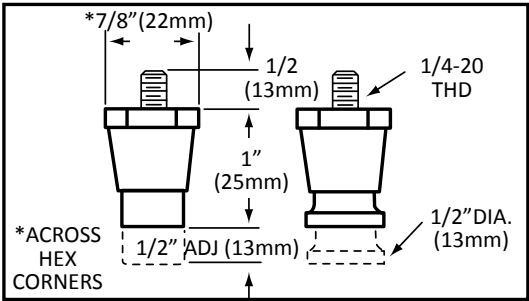

REF. E


1" (25mm) HIGH
ZAMAK APPLIANCE LEG
• HEAT RESISTANT

STATIC LOAD CAPACITY 100 lbs

MODEL NO.	FINISH	FOOT TYPE
A60-2105	Chrome	Round

REF. F


THREAD CONVERTER
EASILY SCREWS ON EXISTING
APPLIANCE LEG TO CONVERT
1/4-20 PROTRUDING STUD THREAD
TO A 3/8-16 THREAD
MODEL NO. A60-1438





4" (102mm) HIGH
HEAVY DUTY APPLIANCE LEGS

- DESIGNED FOR LARGE COUNTERTOP APPLIANCES
- DIE CAST ZAMAK ADJUSTABLE FLANGE FOOT • OPTIONAL NON-SKID FOOT PADS AVAILABLE
- ROUGH, RUGGED THERMOPLASTIC BODY WITH STEEL STUD
- WRENCH FLATS FOR EASY INSTALLATION AND ADJUSTMENT • CHOICE OF BLACK OR NICKEL PLATED MATTE FINISHES
- 2000 lbs (900 kg) STATIC LOAD CAPACITY PER LEG

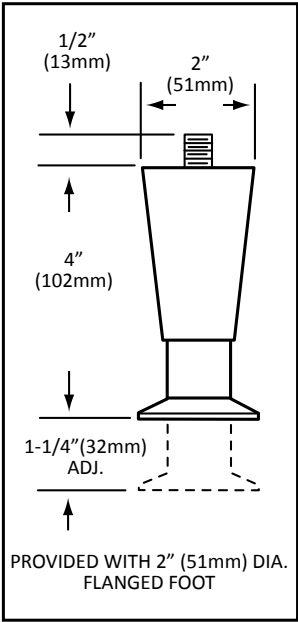

MODEL NO.	MOUNTING STUD	DESCRIPTION
A70-1000	1/2-13 Protruding	Matte Black Thermoplastic Body With Matte Nickel Plated Zamak Flanged Foot
A70-1010	1/2-13 Flush	
A70-1020	3/8-16 Protruding	
A70-1010-M	M12 Flush	Matte Black Thermoplastic Body With Matte Nickel Plated Zamak Flanged Foot with Black Nylon Glide
A70-1020-GL	3/8-16 Protruding	
A70-2000	1/2-13 Protruding	
A70-2010	1/2-13 Flush	Matte Nickel Plated Thermoplastic Body With Matte Nickel Plated Zamak Flanged Foot
A70-2020	3/8-16 Protruding	
A70-2010-M	M12 Flush	
A71-1020	3/8-16 Protruding	Hi-Temp Thermoplastic Rated To 300°f Constant, 350°f Intermittent


NOTE: OPTIONAL NON-SKID NEOPRENE FOOT PADS AVAILABLE
SPECIFY MODEL NO. A70-X011 WHEN ORDERING





QUICK CORNER™ BRACKETS FOR ADJUSTABLE UNDERSHELVES FOR 1-1/2" (38mm) O.D. LEGS and 1-5/8" (41mm) O.D. LEGS

QUICK CORNER BRACKETS are pre-finished die cast aluminum components. They are easily fastened to pre-notched sheet metal undershelves to provide strong, secure, rigid undershelf support assemblies. Adjusting screws are provided for setting the undershelf to any desired height. Welding, grinding and polishing is eliminated and knock-down shipping is facilitated. Corner and center brackets are designed for either 1-1/2" (38mm) or 1-5/8" (41mm), O.D. tubing. Notching diagrams are provided with installation instructions.

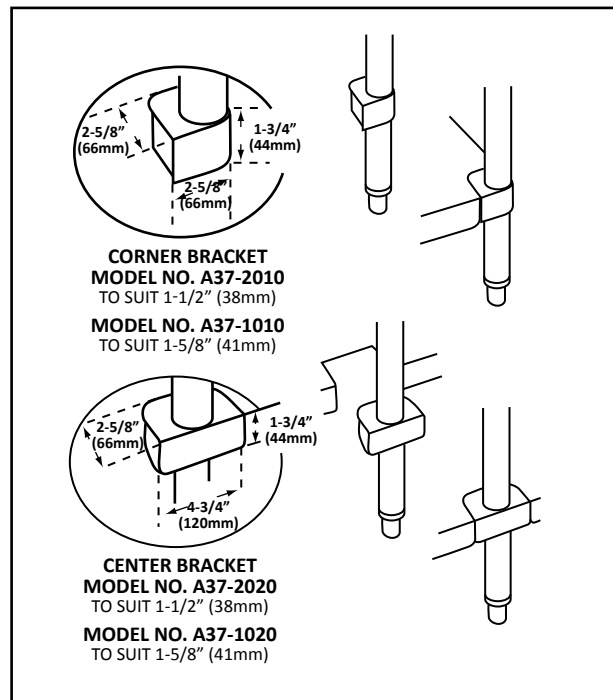

NSF STANDARDS GOVERNING THE USE OF SET SCREWS IN NON-FOOD ZONES REQUIRES THE PLUGGING OF THE HEX SOCKET HOLE AFTER FINAL ASSEMBLY AND TIGHTENING. THIS MAY BE ACCOMPLISHED BY APPLYING A HARDENING TYPE SILICONE SEALANT OR THE USE OF A HOLE PLUG.

REMOVABLE MOUNTING PLATES

- 11 ga (3mm) ZINC PLATED STEEL


SQUARE MOUNTING PLATES

3-1/2" x 3-1/2"
(89mm x 89mm)

MODEL NO. A44-X301-C
(1/2-13 TH'D)

MODEL NO. A44-X309-C
(5/8-11 TH'D)


MODEL NO. A44-X341-C
(3/4-10 TH'D)

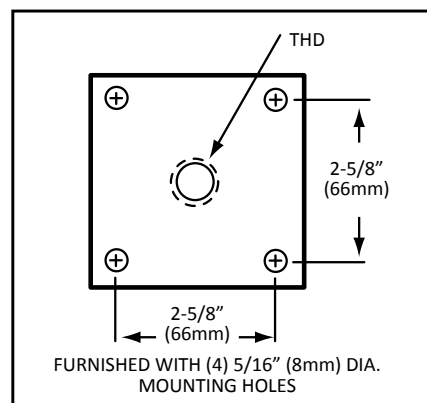

RECTANGULAR MOUNTING PLATES

2-1/2" x 3-5/8"
(63mm x 92mm)

MODEL NO. A44-X327-C

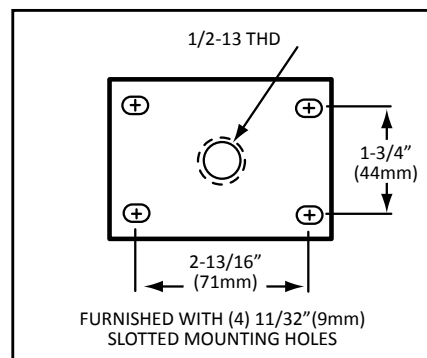



CROSS BRACE FITTINGS

FOR 1-1/2" (38mm) O.D. LEGS
and 1-5/8" (41mm) O.D. LEGS

Designed to mate 1-1/2" (38mm) and 1-5/8" (41mm) O.D. vertical legs with 1-1/4" (32mm) O.D. horizontal cross rails. These die cast aluminum or stainless steel (-SS) cross brace fittings eliminate notching, welding and polishing. Permits knock down shipping to reduce freight costs. Furnished with locking set screws for secure finished assembly.

END CROSS BRACE FITTING


MODEL NO. A35-2020

TO SUIT 1-1/2" (38mm)
VERTICAL LEGS

MODEL NO. A35-1020

MODEL NO. A35-1020-SS

TO SUIT 1-5/8" (41mm)
VERTICAL LEGS

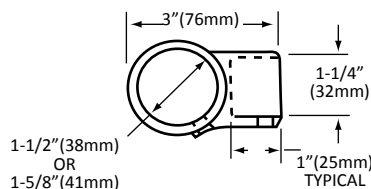

CORNER CROSS BRACE FITTING


MODEL NO. A35-2010

TO SUIT 1-1/2" (38mm)
VERTICAL LEGS

MODEL NO. A35-1010

MODEL NO. A35-1010-SS

TO SUIT 1-5/8" (41mm)
VERTICAL LEGS

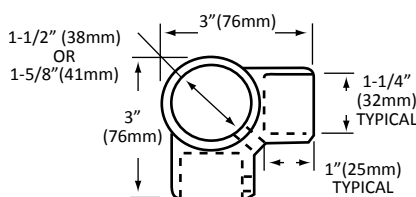


CENTER CROSS BRACE FITTING

MODEL NO. A35-2030

TO SUIT 1-1/2" (38mm)
VERTICAL LEGS

MODEL NO. A35-1030


TO SUIT 1-5/8" (41mm)
VERTICAL LEGS

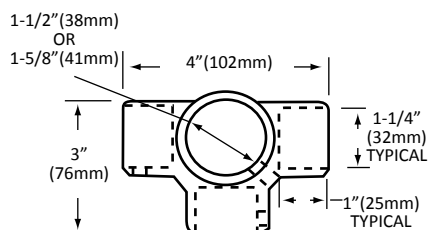

CENTER CROSS BRACE FITTING

MODEL NO. A35-1025-SS

TO SUIT 1-5/8" (41mm)
VERTICAL LEGS

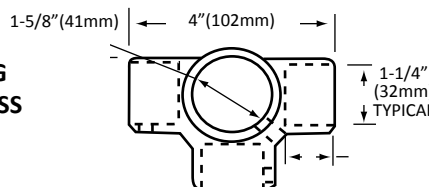

NSF STANDARDS GOVERNING THE USE OF SET SCREWS IN NON-FOOD ZONES REQUIRES THE PLUGGING OF THE HEX SOCKET HOLE AFTER FINAL ASSEMBLY AND TIGHTENING. THIS MAY BE ACCOMPLISHED BY APPLYING A HARDENING TYPE SILICONE SEALANT OR THE USE OF A HOLE PLUG. STANDARD NSF TYPE PUSH-IN PLASTIC HOLE PLUGS ARE AVAILABLE. SPECIFY A10-0020 WHEN ORDERING.

ADJUSTABLE FOOT LEVELERS

• NON-MARKING




MODEL NO.
A60-2724

500lbs load capacity
per glide




MODEL NO.
A60-4444

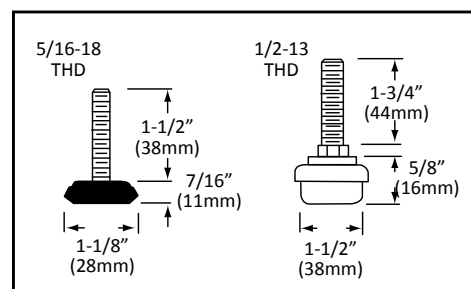

KICK PLATE SPRING CLAMP

MODEL NO. A76-4460

• FITS ON 1-1/4" PIPE, 1-5/8" (41mm) and
2" (51mm) O.D. TUBING • ZINC PLATED STEEL



INSTITUTIONAL CASTERS



Bumper Components

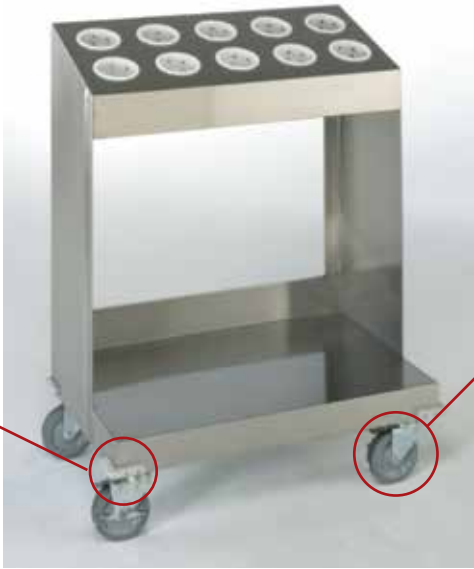


Plate Casters • Stem Casters
Expanding Fastener Casters
Rigid Casters • Brake Models
Universal Mounting Plate Models

F

CASTER TERMINOLOGY & SELECTION	F137	STANDARD DUTY PLATE CASTERS	F148
AVAILABLE WHEELS	F138	STANDARD DUTY STEM CASTERS	F149
CASTER SPECIALTIES & ACCESSORIES	F139	MEDIUM DUTY PLATE CASTERS	F150
REGAIL RIDE™ CASTER PACKS	F140-F141	MEDIUM DUTY STEM CASTERS	F151-F152
REGAIL RIDE™ MEDIUM DUTY SWIVEL PLATE CASTERS	F142	STAINLESS STEEL CASTERS	F153
REGAIL RIDE™ RIGID, SWIVEL PLATED AND THREADED CASTERS	F143	THREADED STEM AND PLATE CASTERS	F154
UNIVERSAL MOUNTING PLATE & 3-1/2" CASTERS	F144	ADJUSTABLE CASTER LEG ASSEMBLIES	F155
REGAIL RIDE™ MEDIUM DUTY THREADED STEM CASTERS	F145	MOBILE EQUIPMENT ACCESSORIES	F156-F157
REGAIL RIDE™ MEDIUM DUTY SWIVEL EXPANDING STEM CASTERS	F146-F147	MOUNTING PLATE HOLE PATTERN CONFIGURATOR	F158-F160
		CASTER CONFIGURATOR	F161

CASTER TERMINOLOGY

LOAD (OVERALL) HEIGHT

The vertical distance between the floor and mounting point of the equipment.

OFFSET or LEAD

The horizontal distance between vertical center lines thru the king pin and wheel center.

SWIVEL RADIUS

The horizontal distance from the vertical center line of the king pin to the outside edge of the wheel tread. This dimension specifies the minimum distance required for the caster to swivel 360 degrees when mounted.

STEM CASTER versus PLATE CASTER

Stem casters are either threaded for mounting to a tapped mounting plate or designed with a rubber expanding applicator for mounting the caster to tubing. The construction of the applicator is designed to provide maximum compression against the inside of the tubing thus ensuring a securely assembled caster.

Plate casters are provided with a plate pre-drilled with bolt mounting holes.

RIGID CASTERS

Plate models available from stock. Other styles available on application.

BRAKE and NON-BRAKE CASTERS

Standard brake is on the side of the wheel. "Top Lock" brakes are activated by a foot pedal on the top of the wheel and lock only the wheel. "Total Lock" brakes also activated by a foot pedal on the top of the wheel but lock the wheel and prevent the wheel from swiveling.

WHEEL BEARINGS


Wheel bearings may be either sintered or ball bearing types.

SINTERED

A powdered metal, oil impregnated straight bearing that is self-lubricating, long lasting and impervious to heat and cold.

BALL BEARING

A flanged, permanently lubricated bearing, pressed in on each side of the wheel hub.

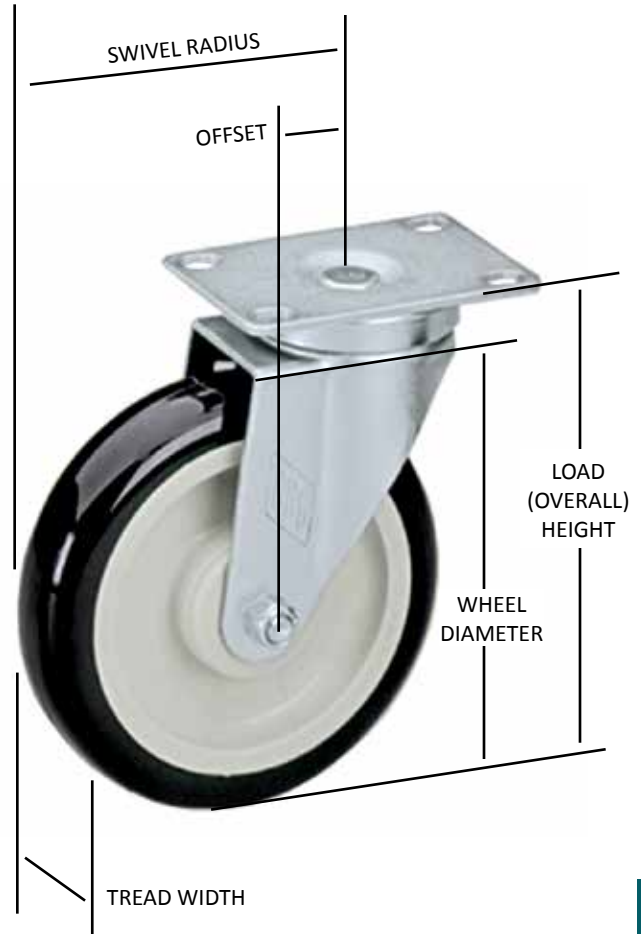

NATIONAL SANITATION FOUNDATION

ALL CASTERS SHOWN IN THIS CATALOG BEARING THE NSF SEAL MEET THE REQUIRED CONSTRUCTION STANDARDS AND ARE LISTED UNDER FOOD SERVICE EQUIPMENT CRITERIA C2

CASTER SELECTION

LOAD WEIGHT

The heavier the load, the larger the wheel required for the caster. The weight of the load also influences the mobility of the wheel. Weight requirements per caster may be specified as:

Light Duty: 0-80 lbs (0-35 kg) **Standard Duty: 100-200 lbs (45-90 kg)**
Medium Duty: 200-300 lbs (90-135 kg) **Heavy Duty: 300-500 lbs (135-225 kg)**
Extra Heavy Duty: 500 lbs+ (225 kg+)

FLOOR CONDITIONS

The correct diameter of caster wheel is one that is large enough to pass over floor cracks and other similar obstacles. In choosing the correct caster, consideration must be given to the type of floor such as ceramic, tile, vinyl, brick or cement. Surface conditions are affected by grease, detergent, and heat. Autoclave requirements also bear on the choice of caster.

WHEELS AVAILABLE FROM STOCK


Institutional caster wheels are offered in a large variety of types, treads, materials and sizes. The type and size of wheels chosen depends on several considerations.

- 1. The total overall weight of the load
- 2. The floor surface and conditions
- 3. Unusual environmental conditions such as moisture, extreme heat or cold
- 4. Exposure to chemicals, salt, oil, blood, fats, etc
- 5. Shock loading and other physical impacts
- 6. Noise



POLYOLEFIN WHEELS

Very economical, solid polyolefin wheels are also lightweight, hard and easy rolling. Made from durable thermoplastic, these wheels generally require no bearings and are ideal for use in corrosive conditions which can cause continual, costly, bearing replacement. Polyolefin material resists most oils, grease, solvents, acids and other chemicals. Temperature range is -20°F to 180°F (-29°C to 82°C).



POLYURETHANE WHEELS

Polyurethane wheels are manufactured with a precision molded polyurethane tire mechanically locked to a polyolefin core. They are chemical and corrosion resistant. Virtually indestructible, polyurethane wheels are at the same time economical and smart in appearance. Temperature range is -30°F to 180°F (-34°C to 82°C).



SOLID RUBBER WHEELS

All solid rubber wheels are molded of top quality rubber compounds and are non-marking. Maximum rolling efficiency and longer trouble free service are features. Temperature range is -30°F to 160°F (-34°C to 71°C).

WHEEL APPLICATION GUIDE

	CAPACITY (LBS/WHEEL)	TEMPERATURE RANGE (F)	SHORE HARDNESS
SOLID SOFT RUBBER	150-500	-30 TO + 180	95+/- 5
SOLID HARD RUBBER	150-500	-30 TO + 180	95+/- 5
POLY-LOC GRAY OR BLUE	150-500	-30 TO + 180	95+/- 5
POLYOLEFIN	100-500	-20 TO + 190	65 +/- 5
PHENOLIC	100-500	-45 TO + 250	65 +/- 5
PHENOLIC HI-TEMP	100-500	-45 TO + 450	65 +/- 5

WHEELS AVAILABLE ON SPECIAL APPLICATION



HIGH MODULUS WHEELS

HIGH MODULUS E-Z RIDER WHEELS OFFER EXTREME RESILIENCY AND MOBILITY. THESE SHOCK AND NOISE REDUCING WHEELS ARE IDEAL FOR SMOOTH, QUIET RIDE ON ROUGH OR UNEVEN FLOORS. THEY ARE ALSO NON-MARKING AND DURABLE TO WITHSTAND FREQUENT WASHING CYCLES. E-Z RIDERS ARE ESPECIALLY SUITED FOR HOSPITAL APPLICATIONS. TEMPERATURE RANGE IS -20°F TO 160°F (-29°C TO 71°C).



PHENOLIC WHEELS

PHENOLIC WHEELS ARE COMPRESSION MOLDED PHENOLIC RESIN, FILLED WITH MACERATED CANVAS. THEY ARE HARD TREAD WHEELS WITH HIGH LOAD CAPACITY AND ARE HEAT RESISTANT AND UNAFFECTED BY MOST OILS AND OTHER CHEMICALS. THEY ROLL EASILY AND MORE QUIETLY THAN STEEL OR CAST IRON, PROVIDING GREATER FLOOR PROTECTION. PHENOLIC WHEELS ARE IDEAL FOR MATERIAL HANDLING APPLICATIONS. TEMPERATURE RANGE IS -45°F TO 250°F (-43°C TO 121°C).



SOLID RUBBER WHEELS

ALL SOLID RUBBER WHEELS ARE MOLDED OF TOP QUALITY RUBBER COMPOUNDS AND ARE NON-MARKING. MAXIMUM ROLLING EFFICIENCY AND LONGER TROUBLE FREE SERVICE ARE FEATURES. TEMPERATURE RANGE IS -30°F TO 160°F (-34°C TO 71°C).



HIGH TEMPERATURE PHENOLIC WHEELS

IN ADDITION TO ALL OF THE FEATURES OF THE PHENOLIC WHEELS, HIGH TEMPERATURE PHENOLIC WHEELS OFFER A SPECIAL HIGH TEMPERATURE OPERATING RANGE OF -45°F TO 450°F (-43°C TO 230°C). THIS UNIQUE FEATURE IS ESPECIALLY IMPORTANT IN APPLICATIONS SUCH AS ROLL-IN BAKING OVENS.

CASTER SPECIALTIES AND ACCESSORIES

THE FOLLOWING CASTER SPECIALTIES AND ACCESSORIES ILLUSTRATED ARE REPRESENTATIVE OF THE RANGE OF SPECIALTY CASTER DESIGNS AVAILABLE. TECHNICAL ASSISTANCE IS AVAILABLE FOR SPECIAL REQUIREMENTS.



THREADED STEM CASTERS

COMPLEMENTING THE STOCK CASTERS FEATURED IN THIS CATALOG IS A WIDE RANGE OF THREADED STEM CASTERS AVAILABLE TO ACCOMMODATE SPECIAL REQUIREMENTS. AMONG THE THREADED STEMS MOST COMMONLY USED AND AVAILABLE ARE:

1/2-13 x 3/4" (19 mm) 1/2-13 x 1" (25 mm) 5/8-11 x 1-3/4" (44 mm)
5/8-18 x 1-3/4" (44 mm) 3/4-10 x 1-3/4" (44 mm)



STEMS FOR SPECIAL APPLICATIONS

COMPONENT HARDWARE GROUP ALSO OFFERS A VARIETY OF SPECIALTY STEM CASTERS INCLUDING THOSE WITH STEMS DESIGNED WITH DRILLED HOLES AND SPRING RINGS. ALSO OFFERED ARE SQUARE, HEXAGONAL OR OCTAGONAL SHAPED STEMS.



ZERK GREASE FITTINGS AND SEALS

ZERK GREASE FITTINGS AND SEALS ARE RECOMMENDED WHEN IT IS IMPORTANT TO MAINTAIN GOOD CASTER LUBRICATION FOR EASIER CASTER SWIVELING AND LONGER BEARING LIFE. ZERK GREASE FITTINGS PROVIDE A CONVENIENT METHOD OF LUBRICATION. THE SEALS EFFECTIVELY RETAIN THE LUBRICANT WHILE PREVENTING DIRT OR MOISTURE FROM ENTERING THE LUBRICATED AREAS. SEALS ARE EFFECTIVE TOO, WHERE EQUIPMENT IS EXPOSED TO FREQUENT WASHINGS OR STERILIZATION CYCLES. SEALS USED AT THE SWIVEL OR AXLE BEARING, OFFER HIGH RESISTANCE TO GREASE, OILS, CHEMICALS AND DETERGENTS.



MOUNTING PLATES

IN ADDITION TO THE STOCK MOUNTING PLATES SHOWN IN THIS CATALOG, ADDITIONAL SIZES ARE OFFERED TO MATCH A WIDE VARIETY OF BOLT HOLE PATTERNS CURRENTLY USED BY MOST CASTER MANUFACTURERS.



TOP LOCK CASTER

- SOLD SEPARATELY OR AS PART OF OUR FINISHED CASTER
 - STAINLESS STEEL CONSTRUCTION
 - LARGE ON/OFF PEDAL FOR EASY OPERATION
- FORM-FITTING TEETH LOCK THE LOWER RACE FOR FULL STRENGTH ENGAGEMENT.
 - SIMPLE AND EFFECTIVE WITH QUICK ENGAGEMENT AND RELEASE

TOP LOCK CAN BE RETROFITTED TO MOST POPULAR CASTERS USING KITS.

TOP LOCK BRAKE KIT - MODEL NO. CTB-1500

AVAILABLE FOR ALL TYPES OF REGAL RIDE™ 5" CASTERS

BRAKE MECHANISM:

"TOP LOCK" BRAKE -

PRESS THE BRAKE PEDAL AND LOCK THE WHEEL.

Regal Ride Caster Packs



MODEL NO.	DUTY	MOUNTING STYLE	CASTERS	WHEEL DIA.	WHEEL TYPE	PACK
CSTPK-1PUP-4B	Medium	3-1/2" X 3-1/2" Universal Plate, Low Profile	N/A	1"	Black Polyolefin	With Brake, 4 Pack
CSTPK-2PUP-4B	Medium	3-1/2" X 3-1/2" Universal Plate, Low Profile	N/A	2"	Black Polyolefin	With Brake, 4 Pack
CSTPK-2PUTS-B	Medium	1/2"-13 x 1 Threaded Stem	N/A	2"	Blue Polyolefin	With Brake, 4 Pack
CSTPK-3BTS	Medium	1/2" - 13 x 1-1/2" Threaded Stem	(2) CMT1-3BBN (2) CMT1-3BPN	3"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-3BTS-7B	Medium	1/2" - 13 x 3/4" Threaded Stem	(4) CMT4-3BBN	3"	Black Polyolefin	With Brake, 4 Pack
CSTPK-3BTS-B	Medium	1/2" - 13 x 1-1/2" Threaded Stem	(2) CMT1-3BBN (2) CMT1-3BPN	3"	Black Polyolefin	With Brake, 4 Pack
CSTPK-3PAL	Medium	3-1/2" x 3-1/2" Square Plate with Adjustable Stem	(4) C48-03185-C	3"	Black Polyolefin	4 Brake
CSTPK-3PAL-1	Medium	3-1/2" x 3-1/2" Square Plate with Adjustable Stem	(2) C47-0306-C (2) C47-0316-C	3"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-3PES	Medium	1-5/8" Expanding Stem	(2) CMS4-3BBN (2) CMS4-3BPN	3"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-3PRS	Medium	Spring Ring Stem For Shelving Posts	(2) C99-1030 (2) C99-1031	3"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-3PSP	Medium	2-3/8" x 3-5/8" Swivel Plate	(2) CMP1-3BBN (2) CMP1-3BPN	3"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-3PUES-3	Medium	1-1/2" Expanding Stem	(2) CMS3-3PBB (2) CMS3-3PPB	3"	Blue Polyurethane	2 Brake/2 Non Brake
CSTPK-3PUES-3B	Medium	1-1/2" Expanding Stem	(4) CMS3-3PBB	3"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-3PUES-4	Medium	1-5/8" Expanding Stem	(2) CMS4-3PPB (2) CMS4-3PBB	3"	Blue Polyurethane	2 Brake/2 Non Brake
CSTPK-3PUES-4B	Medium	1-5/8" Expanding Stem	(4) CMS4-3PBB	3"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-3PUUP-B	Medium	4" X 4" Universal Plate	N/A	3"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-3PUUP-4B	Medium	3-1/2" X 3-1/2" Universal Plate	N/A	3"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-4PBB	Medium	4" x 4-1/2" Swivel Plate	(2) CMP6-35PPB (2) CMP6-35PBB	4"	Blue Polyurethane	2 Brake/2 Non Brake
CSTPK-4PSP	Medium	2-3/8" X 3-5/8" Swivel Plate	(2) CMP1-4BPN (2) CMP1-4BBN	4"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-4PUTS-1B	Medium	1/2"- 13 X 1-1/2" Threaded Stem	(4) CMT4-4PBB	4"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-4RES	Medium	1-5/8" Expanding Stem	(2) CMS4-4RPB (2) CMS4-4RBB	4"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-5BTS	Medium	1/2" - 13 1-1/2" Threaded Stem	(2) CMT1-5BBN (2) CMT1-5BPN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5BUP	Medium	4" x 4" Universal Plate	(2) CMPU-5PBB (2) CMPU-5PPB	5"	Blue Polyurethane	2 Brake/2 Non Brake
CSTPK-5PES	Medium	1-5/8" Expanding Stem	(2) CMS4-5BBN (2) CMS4-5BPN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PES-1	Medium	1" Expanding Stem	(2) CMS1-5BBN (2) CMS1-5BPN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PES-2	Medium	1-1/4" Expanding Stem	(2) CMS2-5BBN (2) CMS2-5BPN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PES-3	Medium	1-1/2" Expanding Stem	(2) CMS3-5BBN (2) CMS3-5BPN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PES-4B-6	Medium	1-5/8" Expanding Stem	(6) CMS4-5PBB	5"	Black Polyolefin	With Brake, 6 Pack

F



MODEL NO.	DUTY	MOUNTING STYLE	CASTERS	WHEEL DIA.	WHEEL TYPE	PACK
CSTPK-5PFC-B	Medium	Female Collar	N/A	5"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-5PRS	Medium	Spring Ring Stem For Shelving Posts	(2) C99-1050 (2) C99-1051	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PRS-B	Medium	Spring Ring Stem For Shelving Posts	(4) C99-1051	5"	Black Polyolefin	With Brake, 4 Pack
CSTPK-5PRS-SP1	Medium	Spring Ring Stem For Shelving Posts with bumpers	(2) C99-1050 (2) C99-1051	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PSP	Medium	2-3/8" x 3-5/8" Swivel Plate	(2) CMP1-5BBN (2) CMP1-5BPN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PTS	Medium	Threaded Stem	(2) CMT3-5BPN (2) CMT3-5BBN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PUES-3B	Medium	1-1/2" Expanding Stem	(4) CMS3-5PBB	5"	Grey Polyurethane	With Brake, 4 Pack
CSTPK-5PUES-4B	Medium	1-5/8" Expanding Stem	(4) CMS4-5PBB	5"	Grey Polyurethane	With Brake, 4 Pack
CSTPK-5PUES-4B-6	Medium	1-5/8" Expanding Stem	(6) CMS4-5PBB	5"	Grey Polyurethane	With Brake, 6 Pack
CSTPK-5PUP	Medium	4" x 4" Universal Plate	(2) CMPU-5BPN (2) CMPU-5BBN	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PUP-4	Medium	3-1/2" x 3-1/2" Universal Plate	N/A	5"	Black Polyolefin	2 Brake/2 Non Brake
CSTPK-5PURS	Medium	1" Spring Ring Stem	(2) C99-3050 (2) C99-3051	5"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-5PURS-B	Medium	1" Spring Ring Stem	(4) C99-3051	5"	Grey Polyurethane	With Brake, 4 Pack
CSTPK-5PUSP	Medium	2-3/8" x 3-5/8" Swivel Plate	(2) CMP1-5RPB (2) CMP1-5RBB	5"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-5PUSP-B	Medium	2-3/8" x 3-5/8" Swivel Plate	(4) CMP1-5PBB	5"	Grey Polyurethane	With Brake, 4 Pack
CSTPK-5PUTS-1B	Medium	1/2" - 13 x 1-1/2" Threaded Stem	(4) CMT1-5PBB	5"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-5PUTS-2B	Medium	5/8" - 11 x 1-1/2" Threaded Stem	(4) CMT5-5PBB	5"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-5PUTS-3B	Medium	3/4" - 10 x 1" Threaded Stem	N/A	5"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-5PUTS-4	Medium	1/2" - 13 x 1" Threaded Stem	(2) CMT4-5PPB (2) CMT4-5PBB	5"	Blue Polyurethane	2 Brake/2 Non Brake
CSTPK-5PUUP	Medium	3-1/2" x 3-1/2" Universal Plate	(2) CMP4U-5PPB (2) CMP4U-5PBB	5"	Blue Polyurethane	2 Brake/2 Non Brake
CSTPK-5PUUP-4B	Medium	3-1/2" x 3-1/2" Universal Plate	(4) CMP4-5PBB	5"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-5PUUP-B	Medium	4" x 4" Universal Plate	(4) CMPU-5PBB	5"	Blue Polyurethane	With Brake, 4 Pack
CSTPK-5RES	Medium	1-5/8" Expanding Stem	(2) CMS4-5RBB (2) CMS4-5RPB	5"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-5RES-3	Medium	1-1/2" Expanding Stem	(2) CMS3-5RBB (2) CMS3-5RPB	5"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-5RSP	Medium	2-3/8" X 3-5/8" Swivel Plate	(2) CMP1-5RPB (2) CMP1-5RBB	5"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-5RSP-T1	Medium	2-3/8" X 3-5/8" Swivel Plate	(2) CMP1-5RPB-B (2) CMP1-5RTB-B	5"	Grey Polyurethane	2 TopLock/2 Non
CSTPK-5RTS-1	Medium	1/2" - 13 1-1/2" Threaded Stem	(2) CMT1-5RBB (2) CMT1-5RPB	5"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-5RUP	Medium	4" x 4" Universal Plate	(2) CMPU-5RBB (2) CMPU-5RPB	5"	Grey Polyurethane	2 Brake/2 Non Brake
CSTPK-6PBB	Medium	4" x 4-1/2" Swivel Plate	(2) CMP6-5PPB (2) CMP6-5PBB	6"	Blue Polyurethane	2 Brake/2 Non Brake

Regal Ride™ Medium Duty Swivel Plate Casters



MEDIUM DUTY SWIVEL PLATE CASTERS

- FULL 1-1/4" (32mm) TREAD WIDTH
- LOAD CAPACITY 250 lbs (110 kg) PER WHEEL
- CHOICE OF POLYOLEFIN OR POLYURETHANE WHEELS
- BRAKE AND NON-BRAKE MODELS
- PROVIDED WITH HEAVY 9 GAUGE (4mm) MOUNTING PLATE



MOUNTING PLATE SIZE:
2-3/8" x 3-5/8" (60mm x 92mm) WITH HOLE OPENINGS SPACED ON
1-3/4" x 3" (44mm x 76mm) CENTERS TO ACCEPT 1/4" OR 5/16" (6mm or 8mm) DIA. BOLTS
FOR PLATE HOLE PATTERN CONFIGURATION, REFER TO PG. B20-21.

MEDIUM DUTY SWIVEL PLATE CASTERS										
CASTER CONFIGURATION DATA			BLACK POLYOLEFIN WHEELS LOAD CAPACITY: 250 lbs (110 kg)		BLACK RUBBER WHEELS LOAD CAPACITY: 200 lbs (90 kg) *250 lbs (110 kg)		GRAY POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)		DARK BLUE POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMP1-3BPN	CMP1-3BBN	CMP1-3KPN	CMP1-3KBN	—	—	CMP1-3PPB	CMP1-3PBB
4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMP1-4BPN	CMP1-4BBN	CMP1-4KPN	CMP1-4KBN	CMP1-4RPB	CMP1-4RBB	CMP1-4PPB	CMP1-4PBB
			CMP1-5BPN	CMP1-5BBN	CMP1-5KPN*	CMP1-5KBN*	CMP1-5RPB	CMP1-5RBB	CMP1-5PPB	CMP1-5PBB
5" (127mm)	6" (152mm)	4" (102mm)	—	—	—	—	CMP1-5RPB-B		—	—
			—	—	—	—	—	CMP1-5RBB-TB**	—	—

**Top Brake



MEDIUM DUTY RIGID PLATE CASTERS

- LOAD CAPACITY OF 250 lbs PER WHEEL
- FULL 1-1/4" (32mm) TREAD WIDTH • NON-BRAKE MODELS ONLY
- CHOICE OF POLYOLEFIN, POLYURETHANE OR RUBBER WHEELS



MOUNTING PLATE SIZE:*

2-3/8" x 3-5/8" (60mm x 92mm) WITH HOLE OPENINGS SPACED ON
1-3/4" x 3" (44mm x 76mm) CENTERS TO ACCEPT 1/4" OR 5/16" (6mm or 8mm) DIA. BOLTS

MEDIUM DUTY RIGID PLATE CASTERS

CASTER CONFIGURATION DATA			BLACK POLYOLEFIN WHEELS LOAD CAPACITY: 250 lbs (110 kg)	BLACK RUBBER WHEELS LOAD CAPACITY: 200 lbs (90 kg) 250 lbs (110 kg)	GRAY POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)	DARK BLUE POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	MODEL NO.	MODEL NO.	MODEL NO.	MODEL NO.
3" (76mm)	4" (102mm)	—	CMR1-3BPN	CMR1-3KPN	—	CMR1-3PPB
4" (102mm)	5" (127mm)	—	CMR1-4BPN	CMR1-4KPN	CMR1-4RPB	CMR1-4PPB
5" (127mm)	6" (152mm)	—	CMR1-5BPN	CMR1-5KPN	CMR1-5RPB	CMR1-5PPB



STANDARD DUTY SWIVEL PLATE CASTERS*

- 3" x 1-3/8" WIDE (76mm x 35mm) BLACK POLYOLEFIN WHEELS
- BRAKE AND NON-BRAKE MODELS
- LOAD CAPACITY OF 100 lbs (45 kg) PER WHEEL SELECTED

CASTER CONFIGURATION DATA			SWIVEL PLATE 2-3/4" X 3-3/4" (70mm x 95mm) HOLE OPENINGS SPACED ON 1-3/4" X 3" (44mm X 76mm) CENTERS TO ACCEPT 1/4" (6mm) DIA. BOLTS	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
3" (76mm)	3-3/4" (95mm)	2-3/4" (70mm)	CLP2-3BPN	CLP2-3BBN

*FOR PLATE HOLE PATTERN CONFIGURATION, REFER TO PG. F164-F166.



UNIVERSAL MOUNTING PLATE CASTERS

- REDUCES REQUIRED CASTER INVENTORY WHILE PROVIDING MOUNTING FLEXIBILITY
- BOLT HOLE PATTERNS ACCOMMODATE EASY INTERCHANGEABILITY BETWEEN EQUIPMENT LEGS AND CASTERS
- 9-GAUGE ZINC PLATED STEEL MOUNTING PLATE
- 5/16" DIAMETER SLOTTED MOUNTING HOLES FOR EASY ADJUSTABILITY
 - LOCKING AND NON-LOCKING MODELS
- LOAD CAPACITY 250 lbs.(110 kg) PER WHEEL
 - FULL 1-1/4" TREAD WIDTH



COMPONENT

4" x 4" UNIVERSAL MOUNTING PLATE*

CASTER CONFIGURATION DATA			BLACK POLYOLEFIN WHEELS LOAD CAPACITY: 250 lbs (110 kg)		BLACK RUBBER WHEELS LOAD CAPACITY: 250 lbs (110 kg)		GRAY POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)		DARK BLUE POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
5" (127mm)	6" (152mm)	4" (101mm)	CMPU-5BPN	CMPU-5BBN	CMPU-5KPN	CMPU-5KBN	CMPU-5RPB	CMPU-5RBB	CMPU-5PPB	CMPU-5PBB

3-1/2" x 3-1/2" UNIVERSAL MOUNTING PLATE*

5" (127mm)	6" (152mm)	4" (101mm)	CMP4-5BPB	CMP4-5BBB	—	—	—	—	CMP4U-5PPB	CMP4U-5PBB
------------	------------	------------	-----------	-----------	---	---	---	---	------------	------------

MEDIUM DUTY 3-1/2" PLATE & EXPANDING STEM CASTERS

- AVAILABLE FOR MOUNTING PLATE AND EXPANDING FASTENER APPLICATIONS
- LOCKING AND NON-LOCKING MODELS
- LOAD CAPACITY 200 lbs (90 kg) PER WHEEL
- FULL 1-1/4" TREAD WIDTH



MEDIUM DUTY 3-1/2" PLATE & EXPANDING STEM CASTERS

CASTER CONFIGURATION DATA				BLACK RUBBER WHEELS LOAD CAPACITY: 200 lbs (90 kg)	
APPLICATION	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
Plate Caster*	3-1/2" (89mm)	4-7/16" (113mm)	3-1/4" (83mm)	CMP1-35KPN	CMP1-35KBN



COMPONENT

*FOR PLATE HOLE PATTERN CONFIGURATION, REFER TO PG. F164-F166.



MEDIUM DUTY THREADED STEM CASTERS



- FULL 1-1/4" (32mm) TREAD WIDTH • LOAD CAPACITY 250 lbs (110 kg) PER WHEEL
- CHOICE OF POLYOLEFIN, POLYURETHANE OR RUBBER WHEELS • BRAKE AND NON-BRAKE MODELS
- NON-MARRING GREASE RESISTANT POLYURETHANE TIRES
FURNISHED WITH QUIET, EASY ROLLING WHEEL BEARINGS

STEM SIZE 1/2-13 X 1-1/2" LONG STEM

CASTER CONFIGURATION DATA			BLACK POLYOLEFIN WHEELS LOAD CAPACITY: 250 lbs (110 kg)		BLACK RUBBER WHEELS LOAD CAPACITY: 200 lbs (90 kg) *250 lbs (110 kg)		GRAY POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)		DARK BLUE POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs (110 kg)	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMT1-3BPN	CMT1-3BBN	CMT1-3KPN	CMT1-3KBN	—	—	CMT1-3PPB	CMT1-3PBB
4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMT1-4BPN	CMT1-4BBN	CMT1-4KPN	CMT1-4KBN	CMT1-4RPB	CMT1-4RBB	CMT1-4PPB	CMT1-4PBB
5" (127mm)	6" (152mm)	4" (102mm)	CMT1-5BPN	CMT1-5BBN	*CMT1-5KPN	*CMT1-5KBN	CMT1-5RPB	CMT1-5RBB	CMT1-5PPB	CMT1-5PBB

STEM SIZE 5/8-11 X 1-1/2" LONG STEM

3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMT2-3BPN	CMT2-3BBN	—	—	—	—	CMT2-3PPB	CMT2-3PBB
5" (127mm)	6" (152mm)	4" (102mm)	CMT2-5BPN	CMT2-5BBN	—	—	CMT2-5RPB	CMT2-5RBB	CMT2-5PPB	CMT2-5PBB

STEM SIZE 3/4-10 x 1" LONG STEM

5" (127mm)	6" (152mm)	4" (102mm)	CMT3-5BPN	CMT3-5BBN	—	—	—	—	—	—
---------------	---------------	---------------	-----------	-----------	---	---	---	---	---	---

STEM SIZE 1/2-13 X 1" LONG STEM

3" (76mm)	4" (102mm)	2-7/8" (73mm)	—	CMT4-3BBN	—	—	—	—	—	—
5" (127mm)	6" (152mm)	4" (102mm)	—	—	—	—	—	—	CMT4-5PPB	CMT4-5PBB

STEM SIZE 5/8-11 X 1" LONG STEM

5" (127mm)	6" (152mm)	4" (102mm)	CMT5-5BPN	CMT5-5BBN	—	—	CMT5-5RPB	CMT5-5RBB	CMT5-5PPB	CMT5-5PBB
---------------	---------------	---------------	-----------	-----------	---	---	-----------	-----------	-----------	-----------

SPRING RING STEM

3" (76mm)	4" (102mm)	2-7/8" (73mm)	C99-1030	C99-1031	—	—	—	—	—	—
5" (127mm)	6" (152mm)	4" (102mm)	C99-1050	C99-1051	—	—	—	—	—	—

Regal Ride™ Medium Duty Swivel Expanding Stem Casters



MEDIUM DUTY SWIVEL EXPANDING STEM CASTERS

- FULL 1-1/4" (32mm) TREAD WIDTH • LOAD CAPACITY 250 lbs (110 kg) PER WHEEL
- CHOICE OF POLYOLEFIN, POLYURETHANE OR RUBBER WHEELS • BRAKE AND NON-BRAKE MODELS
- ADAPTS TO EITHER ROUND OR SQUARE TUBING



APPLICATION IS BASED ON O.D. OF EITHER ROUND OR SQUARE COMMERCIAL TUBING.
CASTERS EXPAND TO FIT 16, 18 OR 20 GAUGE (1.5mm, 1.2mm or 1mm) WALL THICKNESS.

MEDIUM DUTY EXPANDING STEM CASTERS

CASTER CONFIGURATION DATA				BLACK POLYOLEFIN WHEELS LOAD CAPACITY: 250 lbs. (110 kg.)		BLACK RUBBER WHEELS LOAD CAPACITY: 200 lbs. (90 kg.) **250 lbs. (110 kg.)	
APPLICATION	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
1" (25mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMS1-3BPN	CMS1-3BBN	—	—
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS1-4BPN	CMS1-4BBN	—	CMS1-4KBN
	5" (127mm)	6" (152mm)	4" (102mm)	CMS1-5BPN	CMS1-5BBN	CMS1-5KPN**	CMS1-5KBN**
1-1/4" (32mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMS2-3BPN	CMS2-3BBN	—	—
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS2-4BPN	CMS2-4BBN	CMS2-4KPN	CMS2-4KBN
	5" (127mm)	6" (152mm)	4" (102mm)	CMS2-5BPN	CMS2-5BBN	CMS2-5KPN**	CMS2-5KBN**
1-1/2" (38mm) Dia. Tubing Round Or Square Or 1-1/4" Pipe	3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMS3-3BPN	CMS3-3BBN	—	—
	4" (101mm)	5" (127mm)	3-3/8" (86mm)	CMS3-4BPN	CMS3-4BBN	CMS3-4KPN	CMS3-4KBN
	5" (127mm)	6" (152mm)	4" (102mm)	CMS3-5BPN	CMS3-5BBN	—	—
1-5/8" (40mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMS4-3BPN	CMS4-3BBN	CMS4-3KPN	CMS4-3KBN
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS4-4BPN CMS4-4BPNS*	CMS4-4BBN CMS4-4BBNS*	CMS4-4KPN	CMS4-4KBN
	5" (127mm)	6" (152mm)	4" (102mm)	CMS4-5BPN	CMS4-5BBN CMS4-5BBN-TB***	CMS4-5KPN**	CMS4-5KBN**
2" (51mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	CMS5-3BPN	CMS5-3BBN	—	—
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS5-4BPN	CMS5-4BBN	—	—
	5" (127mm)	6" (152mm)	4" (102mm)	CMS5-5BPN	CMS5-5BBN	—	—

*Stainless steel yoke and brake *** Top Brake

Regal Ride™ Medium Duty Swivel Expanding Stem Casters



MEDIUM DUTY SWIVEL EXPANDING STEM CASTERS

- FULL 1-1/4" (32mm) TREAD WIDTH • LOAD CAPACITY 250 lbs (110 kg) PER WHEEL
- CHOICE OF POLYOLEFIN, POLYURETHANE OR RUBBER WHEELS • BRAKE AND NON-BRAKE MODELS
- ADAPTS TO EITHER ROUND OR SQUARE TUBING



APPLICATION IS BASED ON O.D. OF EITHER ROUND OR SQUARE COMMERCIAL TUBING.
CASTERS EXPAND TO FIT 16, 18 OR 20 GAUGE (1.5mm, 1.2mm or 1mm) WALL THICKNESS.

MEDIUM DUTY EXPANDING STEM CASTERS							
CASTER CONFIGURATION DATA				GRAY POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs. (110 kg.)		DARK BLUE POLYURETHANE WHEELS FURNISHED WITH BALL BEARINGS LOAD CAPACITY: 250 lbs. (110 kg.)	
APPLICATION	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
1" (25mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	—	—	CMS1-3PPB	CMS1-3PBB
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS1-4RPB	CMS1-4RBB	CMS1-4PPB	CMS1-4PBB
	5" (127mm)	6" (152mm)	4" (102mm)	CMS1-5RPB	CMS1-5RBB	CMS1-5PPB	CMS1-5PBB CMS1-5PPB-TB**
1-1/4" (32mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	—	—	CMS2-3PPB	CMS2-3PBB
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS2-4RPB	CMS2-4RBB	CMS2-4PPB	CMS2-4PBB
	5" (127mm)	6" (152mm)	4" (102mm)	CMS2-5RPB	CMS2-5RBB CMS2-5RBB-TB**	CMS2-5PPB	CMS2-5PBB
1-1/2" (38mm) Dia. Tubing Round Or Square Or 1-1/4" Pipe	3" (76mm)	4" (102mm)	2-7/8" (73mm)	—	—	CMS3-3PPB	CMS3-3PBB
	4" (101mm)	5" (127mm)	3-3/8" (86mm)	CMS3-4RPB	CMS3-4RBB	CMS3-4PPB	CMS3-4PBB
	5" (127mm)	6" (152mm)	4" (102mm)	CMS3-5RPB	CMS3-5RBB CMS3-5RBB-TB**	CMS3-5PPB	CMS3-5PBB
1-5/8" (40mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	—	—	CMS4-3PPB	CMS4-3PBB
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS4-4RPB	CMS4-4RBB	CMS4-4PPB	CMS4-4PBB
	5" (127mm)	6" (152mm)	4" (102mm)	CMS4-5RPB	CMS4-5RBB CMS4-5RBB-TB**	CMS4-5PPB CMS4-5PPB-SS*	CMS4-5PBB CMS4-5PBB-SS* CMS4-5PBB-TB**
2" (51mm) Dia. Tubing Round Or Square	3" (76mm)	4" (102mm)	2-7/8" (73mm)	—	—	CMS5-3PPB	CMS5-3PBB
	4" (102mm)	5" (127mm)	3-3/8" (86mm)	CMS5-4RPB	CMS5-4RBB	CMS5-4PPB	CMS5-4PBB
	5" (127mm)	6" (152mm)	4" (102mm)	CMS5-5RPB	CMS5-5RBB CMS5-5RBB-TB**	CMS5-5PPB	CMS5-5PBB

*Stainless steel yoke and brake ** Top Brake



C11 SERIES STANDARD DUTY SWIVEL PLATE CASTERS

- LOAD CAPACITIES OF 125lbs, 150lbs AND 160 lbs (55 kg, 70 kg AND 75 kg) PER WHEEL SELECTED
- RUBBER OR POLYURETHANE TIRES WITH 1" (25mm) TREAD WIDTH
- BRAKE AND NON-BRAKE MODELS



COMPONENT

MOUNTING PLATE SIZE:*

1-3/4" x 3" (45mm x 76mm) WITH HOLE OPENINGS SPACED ON
1" x 2-1/4" (25mm x 57mm) CENTERS TO ACCEPT 1/4" (6mm) DIA. BOLTS

C11 SERIES STANDARD DUTY SWIVEL PLATE CASTERS

CASTER CONFIGURATION DATA			BLACK SOLID RUBBER TIRES LOAD CAPACITY: 125 lbs (55 kg)		GRAY RUBBER TIRES with POLY-LOC DISCS LOAD CAPACITY: 150 lbs (70 kg)		DARK BLUE POLYURETHANE TIRES WITH POLY-LOC DISCS LOAD CAPACITY: 160 lbs (75 kg)	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
3" (76mm)	3-11/16" (95mm)	2-3/4" (70mm)	C11-1030	C11-1031	C11-2030	C11-2031	—	—
4" (102mm)	4-11/16" (120mm)	3-5/16" (85mm)	C11-1040	C11-1041	C11-2040	C11-2041	—	C11-3041
5" (127mm)	5-11/16" (145mm)	4" (102mm)	C11-1050	C11-1051	C11-2050	C11-2051	—	—

C11 SERIES LIGHT DUTY SWIVEL PLATE CASTER

NON-BRAKE MODEL NO.	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	LOAD CAPACITY	TREAD WIDTH	WHEEL MATERIAL	MOUNTING PLATE SIZE:	MOUNTING HOLE SIZE	MOUNTING HOLE SPACING
C11-1020	2" (51mm)	2-1/2" (64mm)	1-7/8" (47mm)	80 lbs (35 kg)	13/16" (20mm)	GRAY RUBBER	1-3/16" x 2" (30mm x 51mm)	3/16" (5mm) Dia.	3/16" x 1-9/16" (5mm x 50mm) Dia.

*FOR PLATE HOLE PATTERN CONFIGURATION, REFER TO PG. F164-F166.



C13 SERIES STANDARD DUTY SWIVEL STEM CASTERS

- FOR 1", 1-1/4", 1-1/2", 1-5/8" & 2" (25mm, 32mm, 38mm, 40mm and 51mm) DIA.
ROUND or SQUARE TUBING and 1-1/4" PIPE
- LOAD CAPACITIES OF 125, 150 and 160 lbs (55, 70 and 75 kg) PER WHEEL SELECTED
 - RUBBER or POLYURETHANE TIRES with 1" (25mm) TREAD WIDTH
 - BRAKE and NON-BRAKE MODELS



COMPONENT

C13 SERIES STANDARD DUTY SWIVEL STEM CASTERS									
CASTER CONFIGURATION DATA				BLACK SOLID RUBBER TIRES LOAD CAPACITY: 125 lbs (55 kg)		GRAY RUBBER TIRES with POLY-LOC DISCS LOAD CAPACITY: 150 lbs (70 kg)		DARK BLUE POLYURETHANE TIRES WITH POLY-LOC DISCS LOAD CAPACITY: 160 lbs (75 kg)	
APPLICATION	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
1" (25mm) Dia. Tubing Round Or Square	4"	4-11/16"	3-5/16"	C13-1140	C13-1141	C13-2140	C13-2141	C13-3140	C13-3141
	5"	5-11/16"	4"	C13-1150	C13-1151	C13-2150	C13-2151	C13-3150	C13-3151
1-1/4" (30mm) Dia. Tubing Round Or Square	4"	4-11/16"	3-5/16"	C13-1240	C13-1241	C13-2240	C13-2241	C13-3240	C13-3241
	5"	5-11/16"	4"	C13-1250	C13-1251	C13-2250	C13-2251	C13-3250	C13-3251
1-1/2" (38mm) Dia. Tubing Round Or Square Or 1-1/4" Pipe	3"	3-11/16"	2-3/4"	C13-1330	C13-1331	—	—	—	—
	4"	4-11/16"	3-5/16"	C13-1340	—	C13-2340	C13-2341	C13-3340	C13-3341
	5"	5-11/16"	4"	C13-1350	C13-1351	C13-2350	C13-2351	C13-3350	—
1-5/8" (40mm) Dia. Tubing Round Or Square	3"	3-11/16"	2-3/4"	C13-5430	C13-5431	—	—	—	—
	4"	4-11/16"	3-5/16"	C13-1440	—	C13-2440	C13-2441	C13-3440	C13-3441
	5"	5-11/16"	4"	C13-1450	C13-1451	C13-2450	C13-2451	C13-3450	C13-3451
2" (51mm) Dia. Tubing Round Or Square	4"	4-11/16"	3-5/16"	C13-1540	C13-1541	C13-2540	C13-2541	C13-3540	C13-3541
	5"	5-11/16"	4"	C13-1550	C13-1551	C13-2550	C13-2551	C13-3550	C13-3551



C21 SERIES MEDIUM DUTY SWIVEL AND RIGID PLATE CASTERS

- LOAD CAPACITIES OF 155, 200, 250 AND 300 lbs (70, 90, 115 and 135 kg) PER WHEEL SELECTED
- RUBBER OR POLYURETHANE TIRES WITH 1-1/4" (32mm) TREAD WIDTH
- BRAKE AND NON-BRAKE MODELS

MOUNTING PLATE SIZE:*
2-3/8" x 3-5/8" (60mm x 92mm) WITH HOLE OPENINGS SPACED ON
1-3/4" x 3" (45mm x 75mm) CENTERS TO ACCEPT 1/4" or 5/16" (6mm or 8mm) DIA. BOLTS



COMPONENT

C21 SERIES MEDIUM DUTY SWIVEL PLATE CASTERS								
CASTER CONFIGURATION DATA			BLACK SOLID RUBBER TIRES LOAD CAPACITY: 155 lbs (70 kg) *200 lbs (90 kg)		GRAY RUBBER TIRES with POLY-LOC DISCS LOAD CAPACITY: 155 lbs (70 kg) *200 lbs (90 kg)		DARK BLUE POLYURETHANE TIRES WITH POLY-LOC DISCS LOAD CAPACITY: 250 lbs (110 kg) *300 lbs (135 kg)	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
3-1/2" (89mm)	4-1/2" (115mm)	3-5/16" (85mm)	*C21-1035	*C21-1036	C21-2035	C21-2036	C21-3035	C21-3036
4" (102mm)	5" (127mm)	3-3/8" (86mm)	—	—	—	—	C21-3040	C21-3041
5" (127mm)	6-1/8" (155mm)	4" (102mm)	*C21-1050	*C21-1051	*C21-2050	*C21-2051	*C21-3050	*C21-3051
C21 SERIES MEDIUM DUTY RIGID PLATE CASTERS								
3-1/2" (89mm)	4-1/2" (115mm)	3-5/16" (85mm)	*C21-1035-R	—	C21-2035-R	—	—	—
5" (127mm)	6-1/8" (155mm)	4" (102mm)	*C21-1050-R	—	*C21-2050-R	—	—	—

*FOR PLATE HOLE PATTERN CONFIGURATION, REFER TO PG. F164-F166.



C23 SERIES MEDIUM DUTY SWIVEL STEM CASTERS

- FOR 1", 1-1/4", 1-1/2", 1-5/8" & 2" (25, 32, 38, 40 & 51mm) DIA. ROUND OR SQUARE TUBING AND 1-1/4" PIPE
 - LOAD CAPACITIES OF 155, 200, 250 AND 300 lbs (70, 90, 115 AND 135 kg) PER WHEEL SELECTED
- RUBBER OR POLYURETHANE TIRES WITH 1-1/4" (32mm) TREAD WIDTH • BRAKE and NON-BRAKE MODELS

C23 SERIES MEDIUM DUTY SWIVEL STEM CASTERS									
CASTER CONFIGURATION DATA				BLACK SOLID RUBBER TIRES LOAD CAPACITY: 155 lbs (70 kg) *200 lbs (90 kg)		GRAY RUBBER TIRES with POLY-LOC DISCS LOAD CAPACITY: 150 lbs (68 kg) *200 lbs (90 kg)		DARK BLUE POLYURETHANE TIRES WITH POLY-LOC DISCS LOAD CAPACITY: 250 lbs (110 kg) *300 lbs (135 kg)	
APPLICATION	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
1" (25mm) Dia. Tubing Round Or Square	3-1/2" (89mm)	4-1/2" (114mm)	3-1/4" (83mm)	*C23-1135	*C23-1136	C23-2135	C23-2136	C23-3135	C23-3136
	5" (127mm)	6-1/8" (160mm)	4" (102mm)	*C23-1150	*C23-1151	*C23-2150	*C23-2151	*C23-3150	*C23-3151
1-1/4" (32mm) Dia. Tubing Round Or Square	3-1/2" (89mm)	4-1/2" (114mm)	3-1/4" (83mm)	*C23-1235	*C23-1236	C23-2235	C23-2236	C23-3235	C23-3236
	5" (127mm)	6-1/8" (160mm)	4" (102mm)	*C23-1250	*C23-1251	*C23-2250	*C23-2251	*C23-3250	*C23-3251
1-1/2" (38mm) Dia. Tubing Round Or Square Or 1-1/4" Pipe	3-1/2" (89mm)	4-1/2" (114mm)	3-1/4" (83mm)	*C23-1335	*C23-1336	C23-2335	C23-2336	C23-3335	C23-3336
	5" (127mm)	6-1/8" (160mm)	4" (102mm)	*C23-1350	*C23-1351	*C23-2350	*C23-2351	*C23-3350	*C23-3351
1-5/8" (40mm) Dia. Tubing Round Or Square	3-1/2" (89mm)	4-1/2" (114mm)	3-1/4" (83mm)	*C23-1435	*C23-1436	C23-2435	C23-2436	C23-3435	C23-3436
	5" (127mm)	6-1/8" (160mm)	4" (102mm)	*C23-1450	*C23-1451	*C23-2450	*C23-2451	*C23-3450	*C23-3451
2" (51mm) Dia. Tubing Round Or Square	3-1/2" (89mm)	4-1/2" (114mm)	3-1/4" (83mm)	*C23-1535	*C23-1536	C23-2535	C23-2536	C23-3535	C23-3536
	5" (127mm)	6-1/8" (160mm)	4" (102mm)	C23-1550	C23-1551	C23-2550	C23-2551	*C23-3550	*C23-3551



C23 SERIES MEDIUM DUTY RIGID STEM CASTERS

- FOR 1", 1-1/4", 1-1/2", 1-5/8" & 2" (25, 32, 38, 40 & 51mm) DIA. ROUND OR SQUARE TUBING AND 1-1/4" PIPE
 - LOAD CAPACITIES OF 155, 200, 250 AND 300 lbs (70, 90, 115 AND 135 kg) PER WHEEL SELECTED
- RUBBER OR POLYURETHANE TIRES WITH 1-1/4" (32mm) TREAD WIDTH • BRAKE and NON-BRAKE MODELS

C23 SERIES MEDIUM DUTY RIGID STEM CASTERS					
CASTER CONFIGURATION DATA				BLACK SOLID RUBBER TIRES LOAD CAPACITY: 155 lbs (70 kg) *200 lbs (90 kg)	
APPLICATION	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
1" (25mm) Dia. Tubing Round Or Square	5" (127mm)	6-1/8" (160mm)	4" (102mm)	*C23-1150-R	—
1-1/4" (32mm) Dia. Tubing Round Or Square	5" (127mm)	6-1/8" (160mm)	4" (102mm)	—	—
1-1/2" (38mm) Dia. Tubing Round Or Square Or 1-1/4" Pipe	5" (127mm)	6-1/8" (160mm)	4" (102mm)	*C23-1350-R	—
1-5/8" (40mm) Dia. Tubing Round Or Square	5" (127mm)	6-1/8" (160mm)	4" (102mm)	*C23-1450-R	—



C21-SS SERIES MEDIUM DUTY STAINLESS STEEL SWIVEL PLATE CASTERS

- LOAD CAPACITY OF 200 lbs (90 kg) PER CASTER • POLY-LOC WHEELS WITH 1-1/4" (32mm) TREAD WIDTH
- COMPLETE WITH ZERK GREASE FITTINGS AND SEALS • BRAKE AND NON-BRAKE MODELS

MOUNTING PLATE SIZE:

2-3/8" x 3-5/8" (60mm x 92mm) WITH HOLE OPENINGS SPACED ON
1-3/4" x 3" (45mm x 76mm) CENTERS TO ACCEPT 1/4" or 5/16" (6mm or 8mm) DIA. BOLTS

STAINLESS STEEL MEDIUM DUTY SWIVEL PLATE CASTERS


CASTER CONFIGURATION DATA			GRAY POLYURETHANE POLY-LOC WHEELS LOAD CAPACITY: 200 lbs (90 kg)	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
5" (127mm)	6-1/8" (155mm)	4-5/16" (110mm)	C21-2050-SS	C21-2051-SS

C23-SS SERIES MEDIUM DUTY STAINLESS STEEL SWIVEL STEM CASTERS

- FOR 1", 1-1/4", 1-1/2", 1-5/8" & 2" (25mm, 32mm, 38mm, 40mm & 51mm) DIA. ROUND OR SQUARE TUBING AND 1-1/4" PIPE
- LOAD CAPACITY OF 200 lbs (90 kg) PER CASTER • POLY-LOC WHEELS WITH 1-1/4" (32mm) TREAD WIDTH
- COMPLETE WITH ZERK GREASE FITTINGS AND SEALS • BRAKE AND NON-BRAKE MODELS

STAINLESS STEEL MEDIUM DUTY SWIVEL STEM CASTERS

CASTER CONFIGURATION DATA				GRAY POLYURETHANE POLY-LOC WHEELS LOAD CAPACITY: 200 lbs (90 kg)		DARK BLUE POLYURETHANE POLY-LOC WHEELS LOAD CAPACITY: 200 lbs (90 kg)	
APPLICATION	WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.
1" (25mm Dia. Tubing Round Or Square)	5" (127mm)	6-1/8" (160mm)	4" (102mm)	C23-2150-SS	C23-2151-SS	—	—
1-1/4" (32mm) Dia. Tubing Round Or Square	5" (127mm)	6-1/8" (160mm)	4" (102mm)	C23-2250-SS	C23-2251-SS	—	—
1-1/2" (38mm) Dia. Tubing Round Or SquareE OR 1-1/4" Pipe	5" (127mm)	6-1/8" (160mm)	4" (102mm)	C23-2350-SS	C23-2351-SS	—	—
1-5/8" (40mm) Dia. Tubing Round Or Square	5" (127mm)	6-1/8" (160mm)	4" (102mm)	C23-2450-SS	C23-2451-SS	—	—
2" (51mm) Dia. Tubing Round Or Square	5" (127mm)	6-1/8" (160mm)	4" (102mm)	C23-2550-SS	C23-2551-SS	—	—
1" (25mm Dia. Tubing Round Or Square)	5" (127mm)	6-1/8" (160mm)	4" (102mm)	—	—	C23-3150-SS	C23-3151-SS

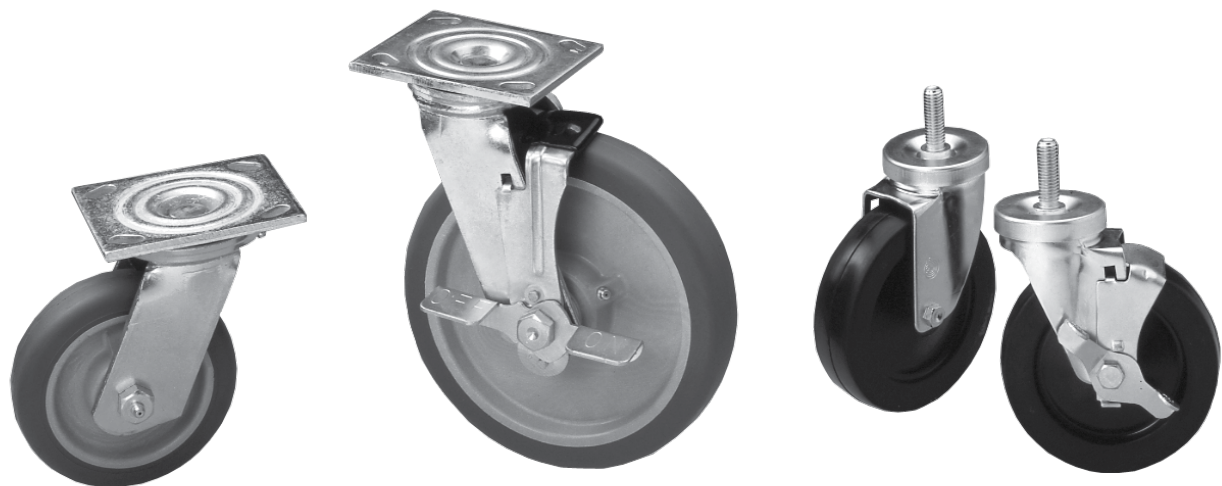

C31 SERIES HEAVY DUTY
SWIVEL PLATE CASTERS

- LOAD CAPACITIES
500 lbs (225 kg) PER CASTER
- GRAY POLYURETHANE POLY-LOC WHEELS
WITH 1-1/2" (38mm) TREAD WIDTH
- SUPPLIED WITH ZERK GREASE FITTINGS AND SEALS
- BRAKE AND NON-BRAKE MODELS

MOUNTING PLATE SIZE:

4" x 4-1/2" (102mm x 114mm)
WITH SLOTTED OPENINGS SPACED ON
2-3/4" x 3-1/4" (70mm x 64mm) CENTERS
TO ACCEPT 1/4" (6mm) DIA. BOLTS



C25 SERIES MEDIUM DUTY
THREADED SWIVEL
STEM CASTERS

- LOAD CAPACITIES
200 lbs (90 kg) PER CASTER
- SOLID RUBBER WHEELS
WITH 1-1/4" (32mm) TREAD WIDTH
- BRAKE AND NON-BRAKE MODELS

1/2-13 X 1-1/2" LONG STEM

CASTER CONFIGURATION DATA			BLACK SOLID RUBBER TIRES LOAD CAPACITY: 200 lbs (90 kg)	
3" (76mm)	3-11/16" (95mm)	2-3/4" (70mm)	C25-1000	C25-1001

NOTE: RIGID NON-BRAKE MODEL AVAILABLE AS A NON-STOCK ITEM.

C31 SERIES
HEAVY DUTY SWIVEL PLATE CASTERS

CASTER CONFIGURATION DATA			GRAY POLYURETHANE POLY-LOC WHEELS LOAD CAPACITY: 500 lbs (225 kg)	
WHEEL DIA.	LOAD HEIGHT	SWIVEL RADIUS	NON- BRAKE MODEL NO.	BRAKE MODEL NO.
5" (127mm)	6-1/2" (165mm)	4-5/16" (110mm)	C31-2050	C31-2051
6" (152mm)	7-1/2" (191mm)	5-1/16" (130mm)	C31-2060	C31-2061
8" (204mm)	9-1/2" (241mm)	6-1/2" (165mm)	C31-2080	C31-2081

NOTE: RIGID PLATE CASTERS AVAILABLE AS
NON-STOCK ITEMS FOR ALL NON-BRAKE MODELS.

- 1-5/8" (41mm) AND 2" (51mm) O.D. STAINLESS STEEL LEGS WITH WELDED MOUNTING PLATES OR PROTRUDING STUDS

- MEDIUM DUTY CASTERS WITH 3", 4" AND 5" (76, 102 AND 127mm) DIA. POLYOLEFIN* WHEELS

- BRAKE AND NON-BRAKE MODELS

- SUPPLIED WITH SLOTTED HEAD LOCKING SET SCREWS TO MEET N.S.F. REQUIREMENTS



SAFETY SERIES ADJUSTABLE CASTER LEG ASSEMBLIES



COMPONENT

SAFETY SERIES CASTER LEG ASSEMBLIES were designed specifically for fryers and other "hot content" equipment that rests on pitched floors and must be moved for cleaning and servicing. To avoid dangerous content spillage, these casters are engineered with a SPECIAL RETAINING FEATURE...the caster CANNOT BE DISASSEMBLED FROM THE LEG while adjusting equipment height or during the movement of equipment. Eliminates incidence of costly spills and serious accidents from caster assemblies inadvertently coming apart.

SAFETY SERIES 1-5/8" (41mm) O.D. CASTER LEG ASSEMBLIES

WHEEL DIA.	MOUNTING TYPE	MINIMUM O.A. HEIGHT	ADJ.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	LOAD RATING PER CASTER
3" (76mm)	3-1/2" (89mm) Square Plate*	6" (152mm)	1/2" (12mm)	C47-0306-C	C47-0316-C	200 lbs (90 kg)
4" (102mm)	3-1/2" (89mm) Square Plate*	7-1/2" (190mm)	1" (25mm)	C47-0406-C	C47-0416-C	275 lbs (125 kg)
5" (127mm)		8-1/2" (215mm)	1" (25mm)	C47-0506	C47-0516	300 lbs (135 kg)
4" (102mm)	1/2-13 Stud	7-1/2" (190mm)	1" (25mm)	C50-0406-C	C50-0416-C	275 lbs (125 kg)
5" (127mm)		8-1/2" (215mm)	1" (25mm)	C50-0506-C	C50-0516-C	300 lbs (135 kg)
3" (76mm)	3-1/2" (89mm) Square Plate**	8-1/2" (215mm)	2" (50mm)		C48-03185-C	300 lbs (135 kg)

**Universal mounting plate – FOR PLATE HOLE PATTERN CONFIGURATION, REFER TO PG. F164-F166.

SAFETY SERIES 2" (51mm) O.D. CASTER LEG ASSEMBLIES


WHEEL DIA.	MOUNTING TYPE	MINIMUM O.A. HEIGHT	ADJ.	NON-BRAKE MODEL NO.	BRAKE MODEL NO.	LOAD RATING PER CASTER
5" (127mm)	3-1/2" (89mm) Square Plate	8-1/2" (215mm)	1" (25mm)	C83-0506	C83-0516	300 lbs (135 kg)
5" (127mm)	3/4-10 Stud	8-1/2" (215mm)	1" (25mm)	C86-0506	C86-0516-C	300 lbs (135 kg)

*Solid Polyolefin Wheels are lightweight, easy rolling wheels made from one of the most durable thermoplastics. These wheels require no bearings and are ideal for those corrosive conditions which cause costly and continual bearing replacement. Polyolefin wheels offer resistance to most oils, chemicals, grease, solvents and acids.

SPECIFICATIONS

- LEGS: 16 ga (2mm), POLISHED TO A #4 SATIN FINISH AND FURNISHED WITH (2) LOCKING SLOTTED HEAD SET SCREWS (TO CONFORM TO NSF REQUIREMENTS).
- MOUNTING PLATES: 11 ga (3mm) PAINTED STEEL, 3-1/2" (89mm) SQUARE WITH FOUR 5/16" (8mm) DIA. HOLES ON 2-5/8" (66mm) CENTERS.
- CASTERS: MEDIUM DUTY WITH *POLYOLEFIN WHEELS WITH A TREAD WIDTH OF 1-1/4" (32mm) AND AN OPERATING TEMPERATURE RANGE OF -20°F TO 180°F (-29°C TO 82°C). HARDNESS OF 65+ 5 DUROMETER ON SHORE D SCALE.

CASTER LEG ASSEMBLIES ARE NON-STOCK ITEMS. OTHER MODELS AVAILABLE ON SPECIAL APPLICATION.

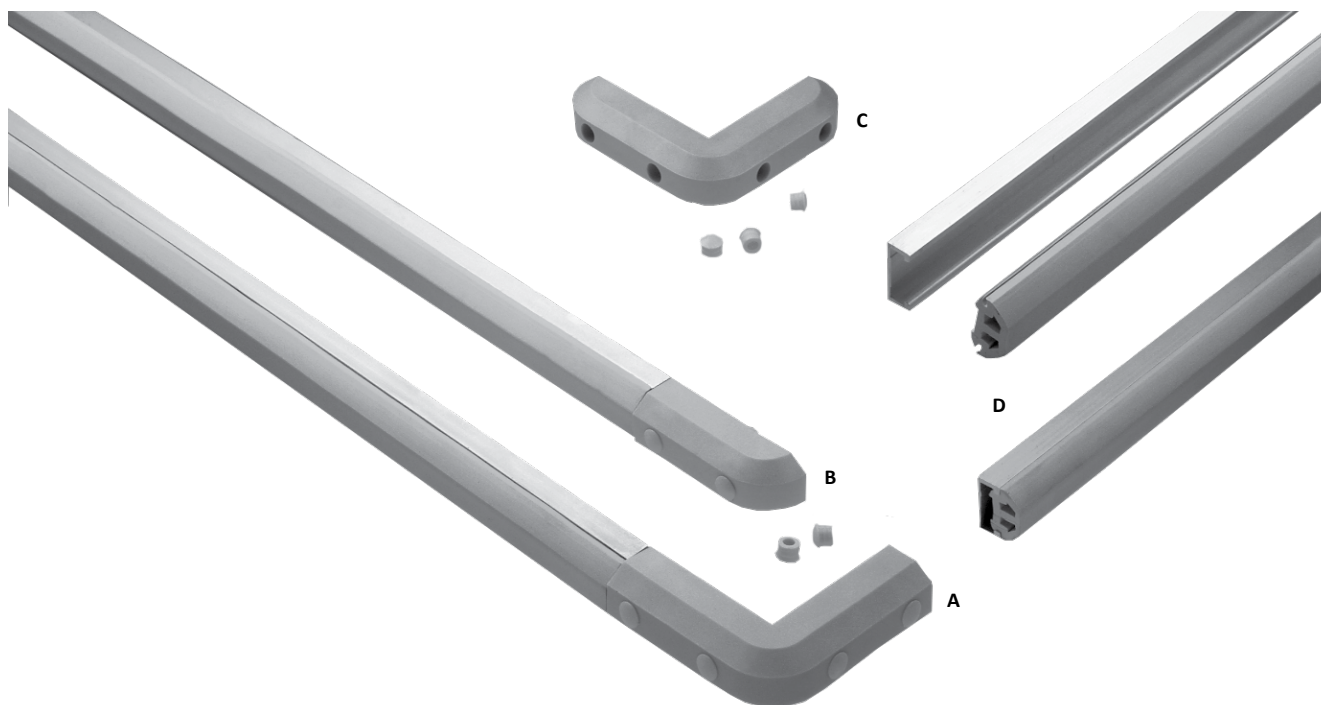


CONTEMPO STRIP BUMPER SYSTEM

- CONCEALED MOUNTING... MAY BE RIVETED OR FASTENED WITH SCREWS
- TWO PIECE CONSTRUCTION... EXTRUDED ANODIZED ALUMINUM BASE WITH A DURABLE CUSHION STRIP THAT EASILY SNAPS IN PLACE
- SPECIAL CORNERS AND ENDS INTERFACE WITH STRIP BUMPER TO PROVIDE A CONTINUOUS, UNIFORM, ONE PIECE APPEARANCE




CORNER INTERFACE MODEL NO. C65-5090

MATERIAL: GRAY PVC
FURNISHED WITH HOLE PLUGS

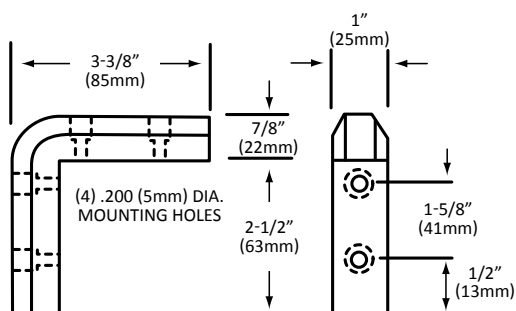

END CAP INTERFACE MODEL NO. C65-5000


MATERIAL: GRAY PVC
FURNISHED WITH HOLE PLUGS

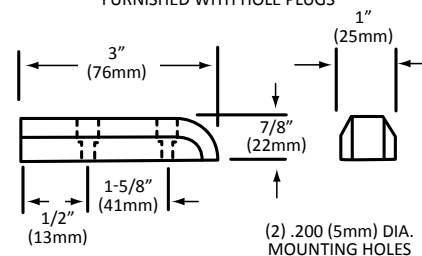

REF. C

CORNER BUMPER MODEL NO. C65-1010

MATERIAL: GRAY PVC
FURNISHED WITH HOLE PLUGS

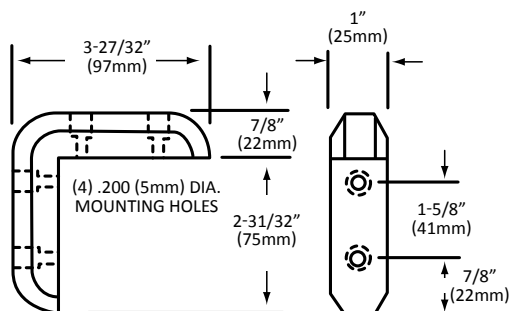


REF. D

STRAIGHT STRIP BUMPER MODEL NO. C65-2072


72" (1829mm) LG.

MODEL NO. C65-2120

120" (3048mm) LG.




MATERIAL: EXTRUDED ALUMINUM RAIL
WITH GRAY PVC SNAP-ON BUMPER STRIP

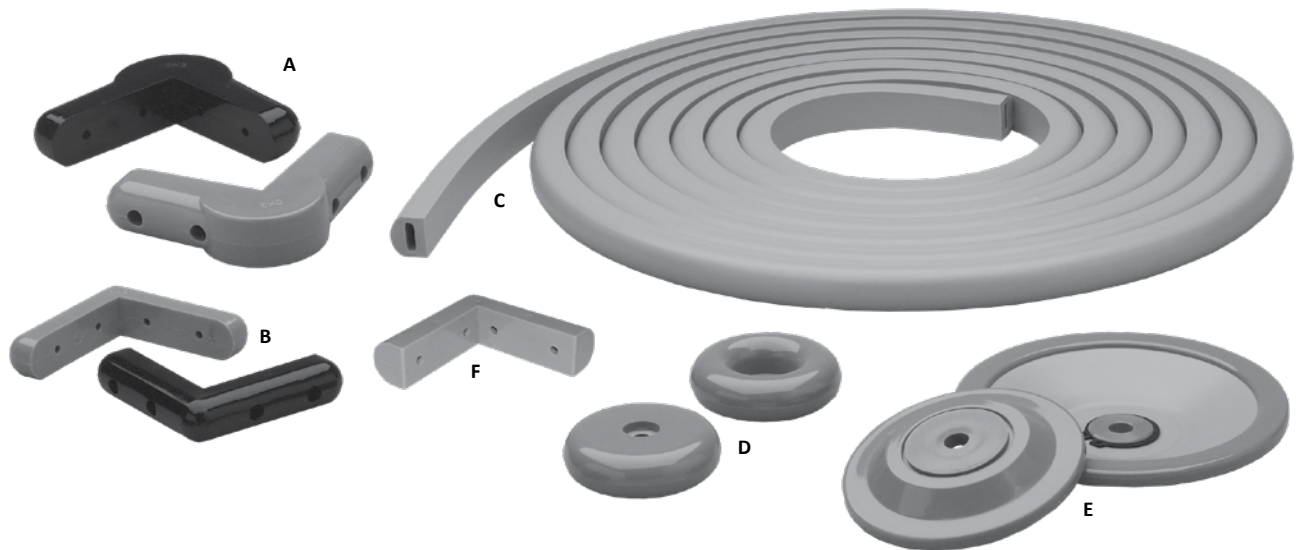

STANDARD BUMPER COMPONENTS

REF. A CORNER BUMPER WITH ROUNDED ENDS & CORNER

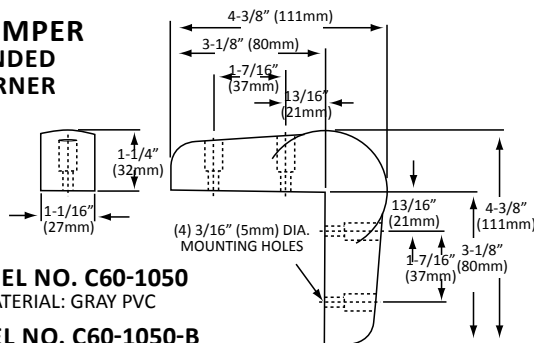


MODEL NO. C60-1050
MATERIAL: GRAY PVC

MODEL NO. C60-1050-B
MATERIAL: BLACK PVC

HOLE PLUGS
MODEL NO. C60-X100-B

REF. B CORNER BUMPER WITH ROUND ENDS

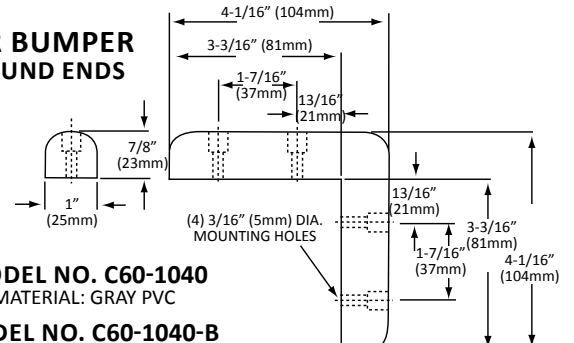

MODEL NO. C60-1040
MATERIAL: GRAY PVC


MODEL NO. C60-1040-B
MATERIAL: BLACK PVC

HOLE PLUGS
MODEL NO. C60-X100-B

REF. C

STRIP BUMPER MODEL NO. C60-5010 MATERIAL: GRAY RUBBER


FURNISHED IN
25 ft. (7.6m) COILS




REF. D

ROUND BUMPER MODEL NO. C60-1020 MATERIAL: GRAY RUBBER, STEEL REINFORCED.

IDEAL FOR USE ON
ENDS OF TUBULAR
HANDLES.

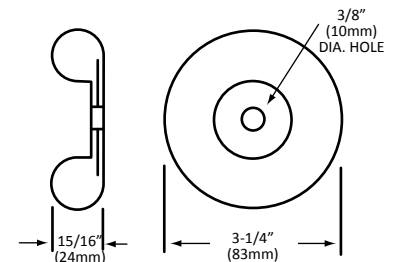

REF. E

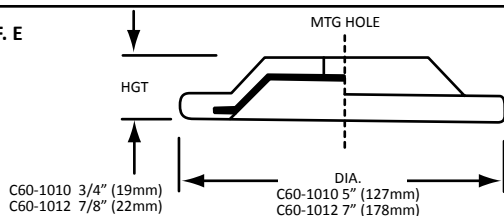

ROLLING BUMPER

MODEL NO. C60-1010 1/2" (13MM) MTG. HOLE


MODEL NO. C60-1012 1/2" (13MM) MTG. HOLE

MODEL NO. C60-1010-SR 0.846" (21MM) MTG. HOLE

FITS: STANDARD AND MEDIUM DUTY CASTERS
MATERIAL: GRAY RUBBER, STEEL REINFORCED

ROLLING BUMPER WHEELS MAY BE SUPPLIED FOR ANY
STOCK DIAMETER STEM WITH RUBBER EXPANDING APPLICATORS

REF. F

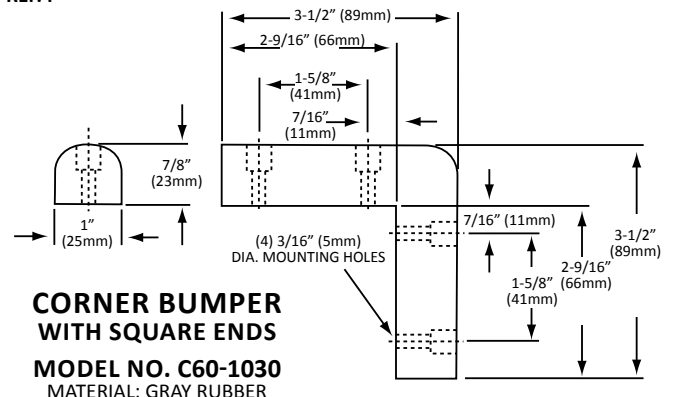


CORNER BUMPER WITH SQUARE ENDS


MODEL NO. C60-1030
MATERIAL: GRAY RUBBER

Mounting Plate Hole Pattern Configurator


CMP1 SERIES MOUNTING PLATE

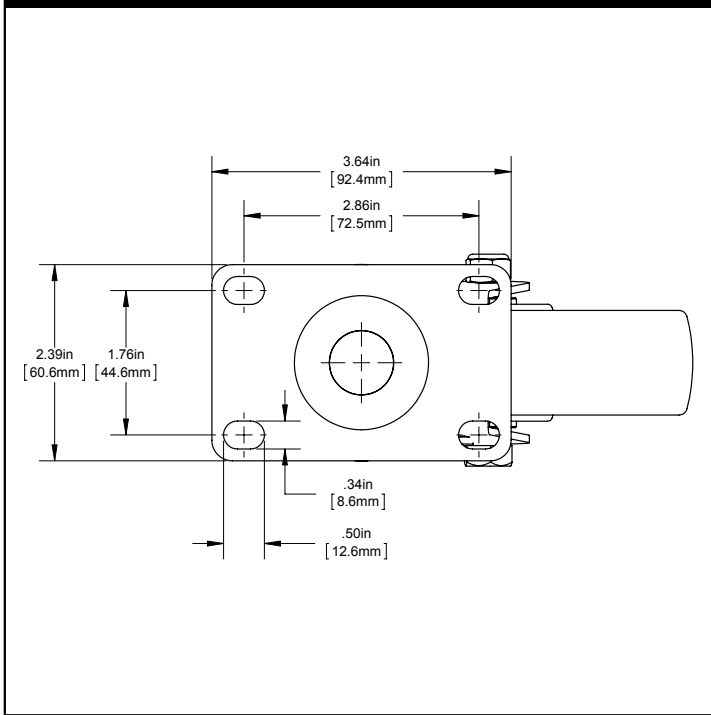


CLP2 SERIES MOUNTING PLATE

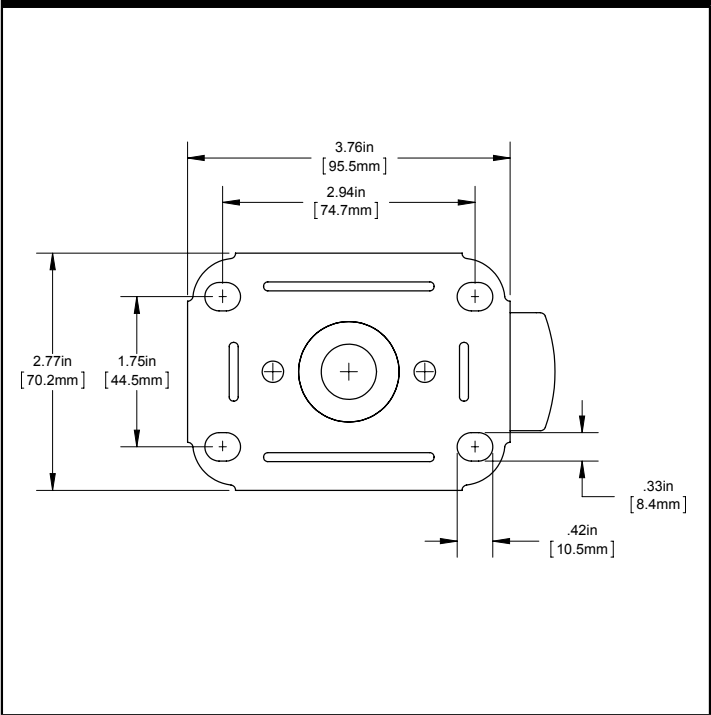

CMP4 SERIES MOUNTING PLATE

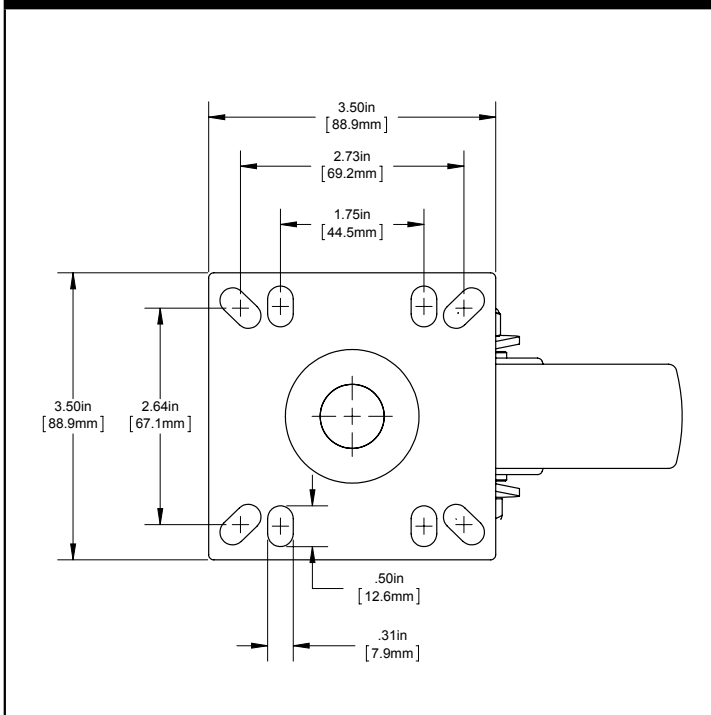


CMPU SERIES MOUNTING PLATE

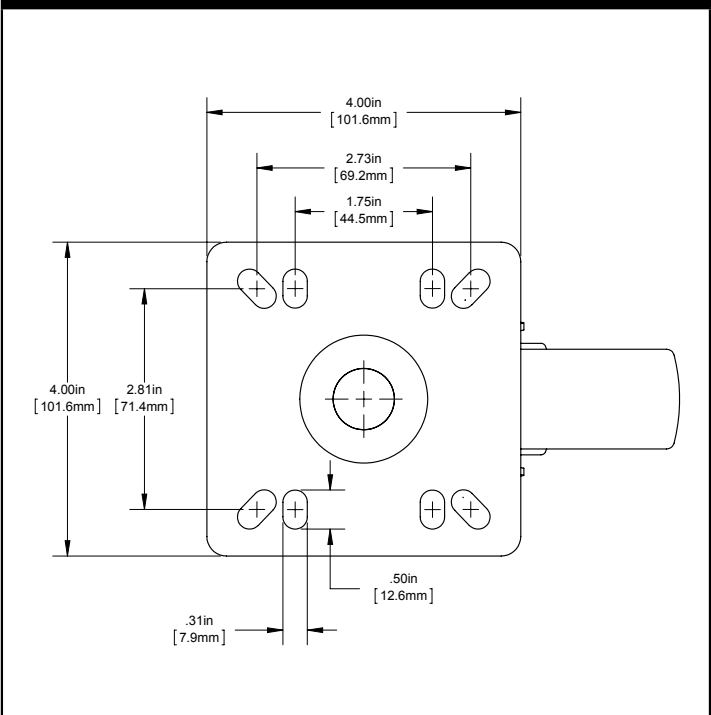


F


C11 LIGHT DUTY SERIES MOUNTING PLATE

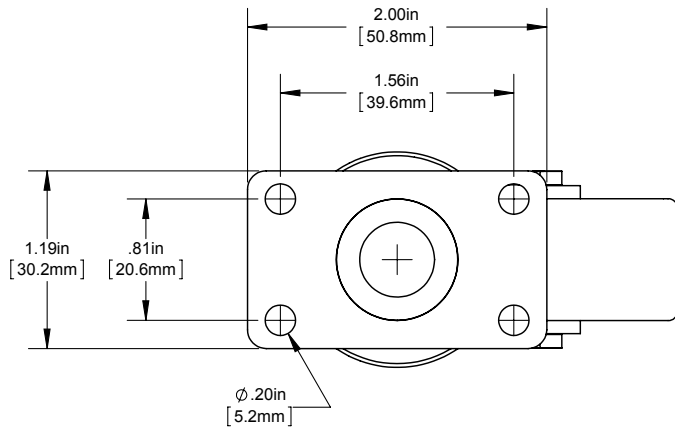


C11 SERIES MOUNTING PLATE

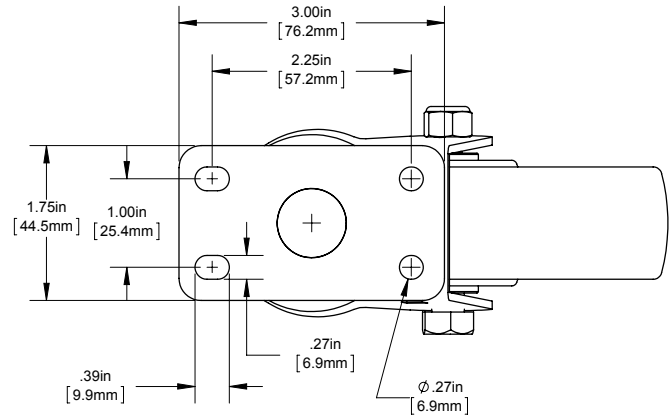


C21 SERIES MOUNTING PLATE

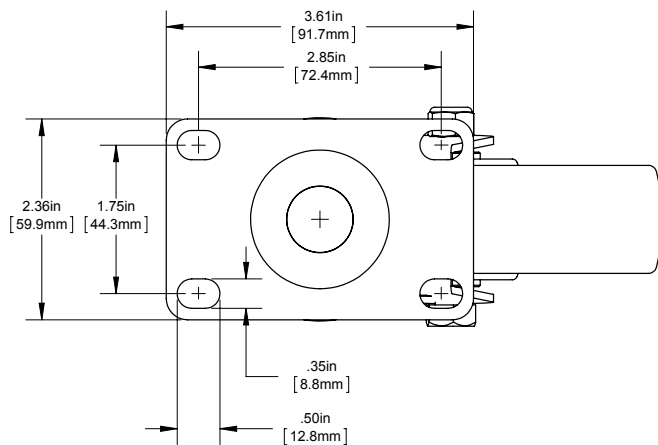


C47 SERIES MOUNTING PLATE

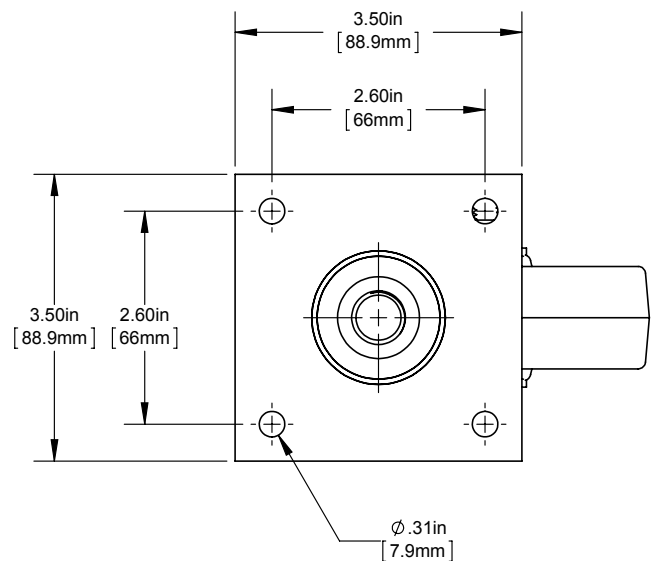

Mounting Plate Hole Pattern Configurator

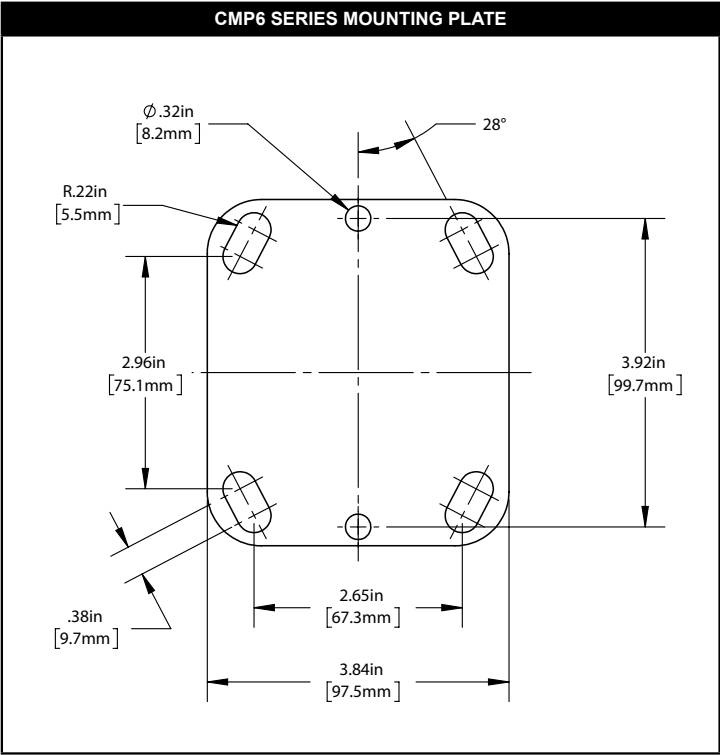

F

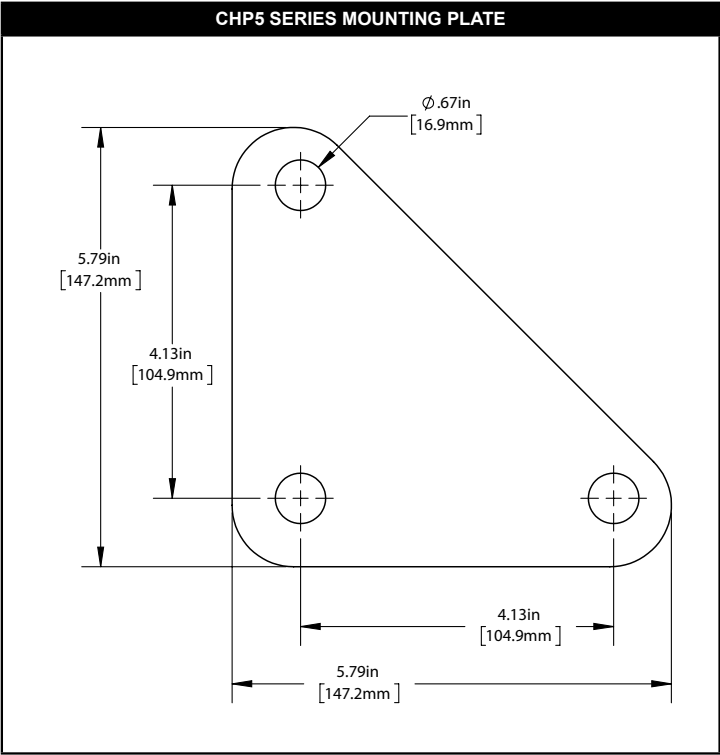

 REGAL RIDE
CASTER™

DUTY		C X X X - X X X - X X								LOCK
M Medium H Heavy L Light	TYPE									TL Total Lock (wheel & swivel) TB Top Lock (wheel only)
	P Plate S Expanding Stem T Threaded Stem R Rigid	MOUNTING STYLE								
		Plate 1 #1 Plate (2-3/8" x 3-5/8") 2 #2 Plate (2-3/4" x 3-3/4") 3 #3 Plate (3-1/2" x 3-1/2") 4 Universal (3-1/2" x 3-1/2") 5 Universal Triangle 6 Universal (4" x 4-1/2") U Universal (4" x 4") Expanding Stem 1 1" 2 1-1/4" 3 1-1/2" 4 1-5/8" 5 2" Threaded Stem 1 ½-13 x 1-1/2" long 2 5/8 – 11 x 1-1/2" long 3 3/4-10 x 1" 4 ½-13 x 1" long 5 5/8-11 x 1" long 6 3/8-16 x 1" long 7 ½-13 x 3/4" long Rigid 1 Plate 2 Stem								
			WHEEL DIA.							
			2 2" 3 3" 35 3-1/2" 4 4" 5 5"							
				WHEEL TYPE						
				K Black Rubber R Grey Polyurethane P Blue Polyurethane B Black Polyolefin						
					BRAKE					
					P Non-Brake B Side Brake					
						BEARING				
						N Without Bearing B With Bearing				



CABINET HARDWARE



G

DOOR HANDLES & PULL/PUSH PLATES	G163	MAGNETIC CATCHES	G176
GRAB BARS	G164	MECHANICAL CATCHES	G177
HANDLES	G165	DRAWER SLIDES	G178-G182
HANDLES & KNOBS	G166	DRAWER PANS	G183
PULLS	G167	STAINLESS STEEL DRAWER ASSEMBLY	G184
RECESSED PULLS	G168	CASH DRAWER ASSEMBLY	G185-G186
HEAVY DUTY STAINLESS STEEL SLIDE AND PADDLE LATCHES	G169	BUMPERS & GROMMETS	G187
PULLS & CATCHES	G170	BALL BEARING SYSTEMS	G188
CABINET LATCHES & CONTINUOUS HINGES	G171	FLAT BEARINGS	G189
LATCHES & HINGES, LIFT-OFF	G172	CONCAVE & RUBBER TIRE BEARINGS	G190
HINGES	G173	BALL BEARING ASSEMBLIES, PULLY & WHEEL	G191
LOCKS	G174-G175	SLIDING DOOR COMPONENTS	G192





SANIGUARD®

SANIGRASP™ DOOR HANDLE

- HEAVY DUTY CONSTRUCTION MOUNTING HARDWARE INCLUDED
- FULL 1" ANGLED TUBULAR PULL FOR OPENING EASE WITH THE FOREARM
 - HOLE PATTERNS TO MATCH MOST STANDARD DOOR PUSH-PULL PLATES MAKE RETRO-FIT EASY
- PROVIDED WITH SANIGUARD® ANTIMICROBIAL PRODUCT PROTECTION
 - ELIMINATES THE NEED TO USE YOUR HAND TO OPEN RESTROOM DOOR AFTER WASHING YOUR HANDS
 - ADA AND ABA COMPLIANT

MODEL NO. SG-101

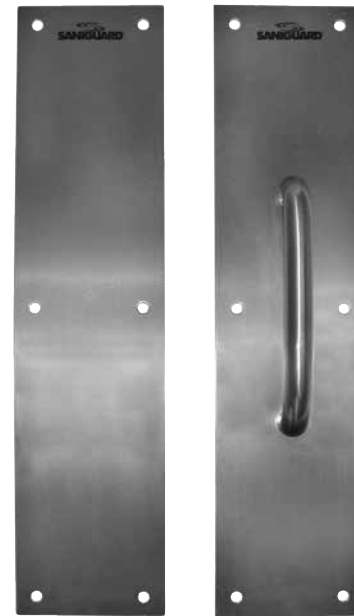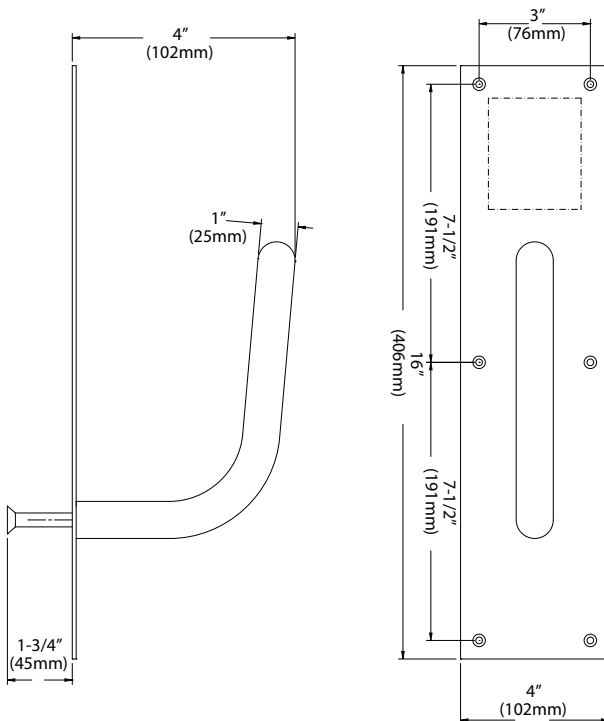


PULL/PUSH PLATES


- ALL STAINLESS STEEL CONSTRUCTION RETRO-FITS TO MOST COMMON PUSH/PULL PLATE HOLE-PATTERNS
- SANIGUARD® TREATMENT INHIBITS THE GROWTH OF BACTERIA, MOLDS AND FUNGI, WHICH CAN CAUSE ODORS, STAINING AND PRODUCT DETERIORATION AND ELIMINATES FINGERPRINTS
 - SANIGUARD® PRODUCT PROTECTION WILL LAST FOR THE USEFUL LIFE OF THE PRODUCT

MODEL NO. P75-1000-Q (B)

MODEL NO. P75-5000 (A)



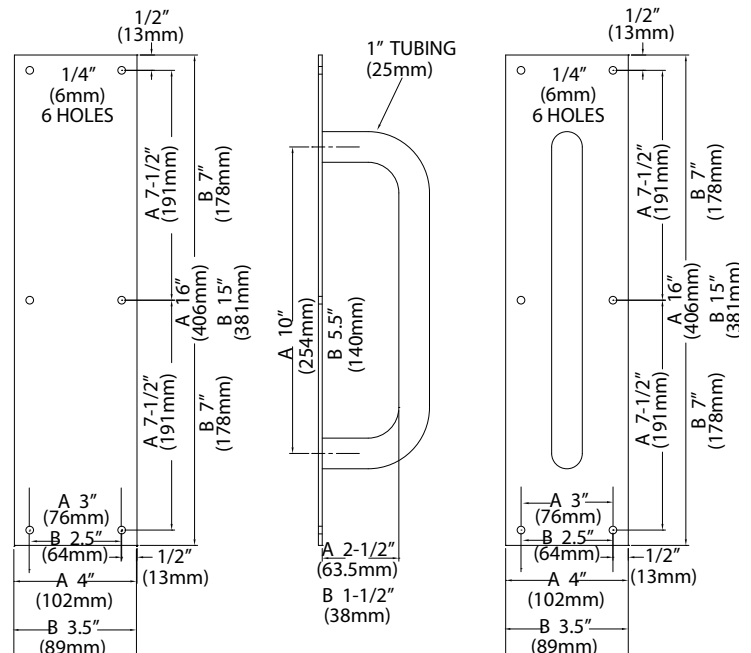


NOTE: SANIGUARD® PRODUCT PROTECTION IS DESIGNED TO KEEP THE PRODUCT FRESHER AND CLEANER BETWEEN NORMAL CLEANING ROUTINES. IT IS NOT A DISINFECTANT AND WILL NOT PROTECT USERS OR OTHERS AGAINST FOOD-BORNE ILLNESS OR DISEASE. ALWAYS USE GOOD HYGIENE AND CLEANING PRACTICES.

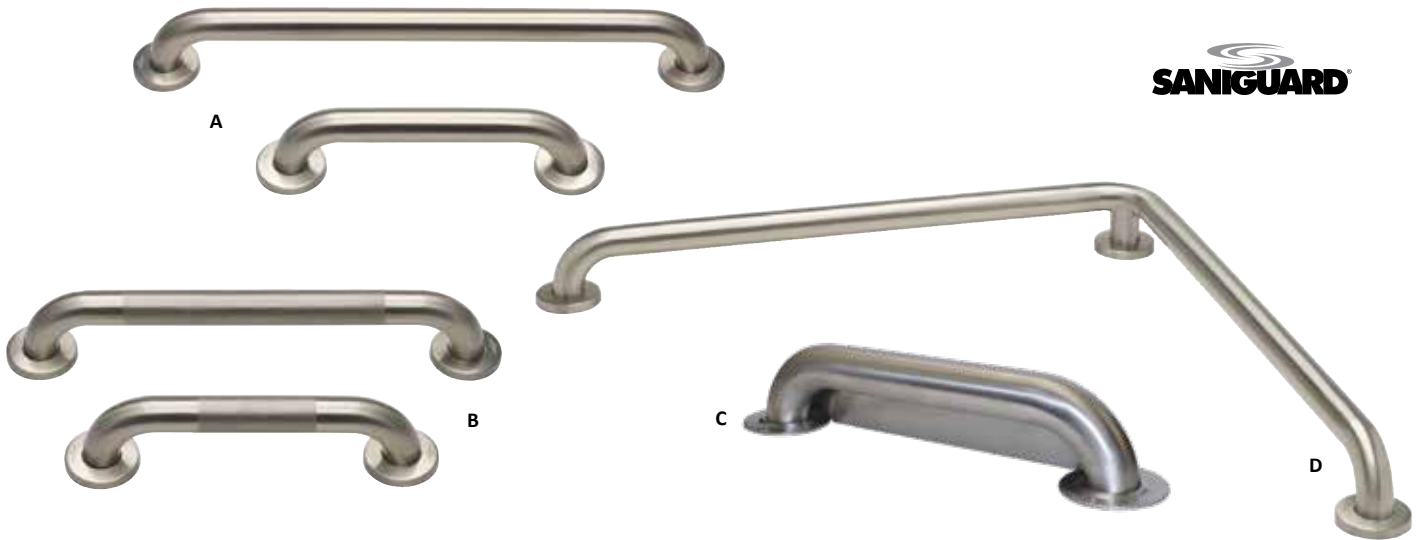

GRAB BARS AND HAND RAILS

REF. A SMOOTH FINISH GRAB BAR		REF. B KNURLED FINISH GRAB BAR		REF. C PRISON ANTI-LIGATURE GRAB BAR	
MODEL NO.	DIMENSION	MODEL NO.	DIMENSION	MODEL NO.	DIMENSION
GBS15-1112-Q	12" (305mm)	GBS15-4112-Q	12" (305mm)	GBS15-1112-QP	12" (305mm)
GBS15-1116-Q	16" (406mm)	GBS15-4116-Q	16" (406mm)	GBS15-1116-QP	16" (406mm)
GBS15-1118-Q	18" (457mm)	GBS15-4118-Q	18" (457mm)	GBS15-1118-QP	18" (457mm)
GBS15-1124-Q	24" (610mm)	GBS15-4124-Q	24" (610mm)	GBS15-1124-QP	24" (610mm)
GBS15-1130-Q	30" (762mm)	GBS15-4130-Q	30" (762mm)	GBS15-1130-QP	30" (762mm)
GBS15-1132-Q	32" (813mm)	GBS15-4132-Q	32" (813mm)	GBS15-1132-QP	32" (813mm)
GBS15-1136-Q	36" (914mm)	GBS15-4136-Q	36" (914mm)	GBS15-1136-QP	36" (914mm)
GBS15-1142-Q	42" (1067mm)	GBS15-4142-Q	42" (1067mm)	GBS15-1142-QP	42" (1067mm)
GBS15-1148-Q	48" (1219mm)			GBS15-1148-QP	48" (1219mm)

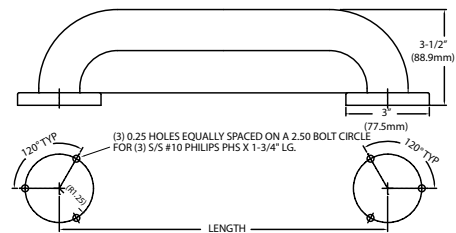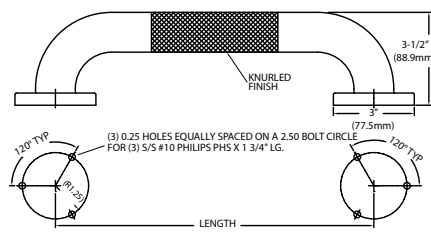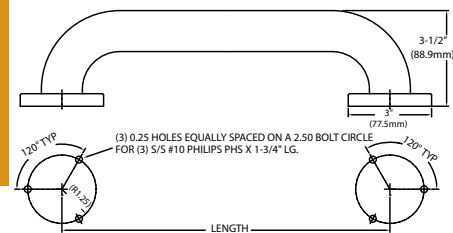


REF. D

SMOOTH L-SHAPED GRAB BAR

MODEL NO.	DIMENSION
GBS15-113030Q	30" x 30" (762mm x 762mm)
—	40" x 30" (1017mm x 762mm)

KNURLED L-SHAPED GRAB BAR

MODEL NO.	DIMENSION
GBS15-413030Q	30" x 30" (762mm x 762mm)
GBS15-414030Q	40" x 30" (1017mm x 762mm)

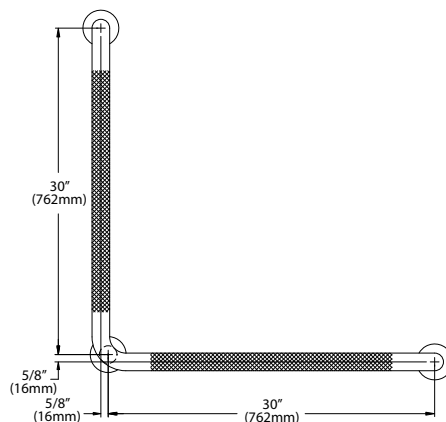

STAINLESS STEEL, 1-1/2" DIAMETER GRAB BARS. AVAILABLE IN SMOOTH OR KNURLED FINISH, COMPLETE WITH CONCEALED MOUNTING FLANGE AND PRESS-ON FLANGE COVER. ALL GRAB BARS ARE PERMANENTLY COATED WITH SANIGUARD® TREATMENT.

NOTE: SANIGUARD® PRODUCT PROTECTION IS DESIGNED TO KEEP THE PRODUCT FRESHER AND CLEANER BETWEEN NORMAL CLEANING ROUTINES. IT IS NOT A DISINFECTANT AND WILL NOT PROTECT USERS OR OTHERS AGAINST FOOD-BORNE ILLNESS OR DISEASE. ALWAYS USE GOOD HYGIENE AND CLEANING PRACTICES.




HANDLES

REF. A



REF. A

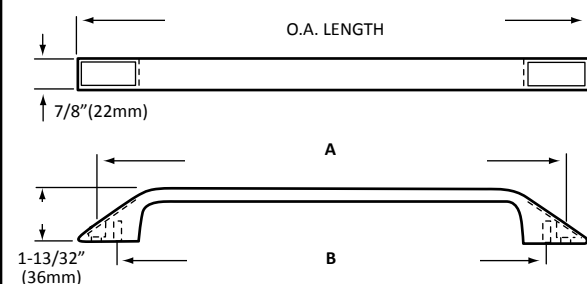


SCULPTURED HANDLES FEATURING...

- SOLID METAL CASTING • POLISHED CHROME FINISH
- FRONT OR REAR FASTENING • TWO LENGTHS AVAILABLE

MODEL NO.	O.A. LENGTH	"A" DIM.	"B" DIM.
P48-1010	14-5/8" (371mm)	13-7/16" (340mm)	12-7/16" (316mm)
P48-1012	12-13/16" (325mm)	11-5/8" (295mm)	10-5/8" (270mm)

NOTES: "A" DIMENSION REPRESENTS HOLE CENTERS FOR FRONT MOUNTING #10 SCREWS. "B" DIMENSION REPRESENTS THREADED HOLE CENTERS TO RECEIVE 1/4-20 SCREWS FOR REAR MOUNTING. DECORATIVE TRIM INSERTS ARE SUPPLIED TO CONCEAL FRONT MOUNTING SCREWS. EXTRA TRIM INSERTS ARE AVAILABLE AND MAY BE ORDERED AS **MODEL NO. P48-X002**.

REF. B

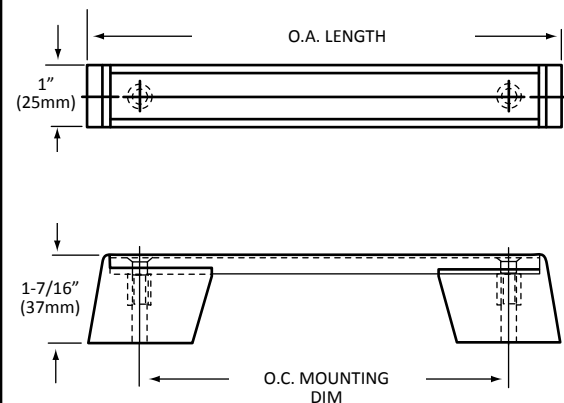


REF. B

DECORATIVE HANDLES FEATURING...

- DUAL MOUNTING...FRONT OR REAR • TWO STANDARD LENGTHS AVAILABLE
- HEAT RESISTANT • HEAVY DUTY CONSTRUCTION

MODEL NO.	O.A. LENGTH	O.C. MOUNTING DIM.
P49-1500-6	7-11/16" (195mm)	6" (152mm)
P49-1500	12-1/4" (311mm)	10-5/8" (270mm)

NOTES: PRE-ASSEMBLED HANDLES WILL ACCEPT SCREWS FOR FRONT MOUNTING. INTERNAL BRASS BUSHINGS ACCEPT STANDARD 1/4-20 MACHINE SCREWS FOR REAR FASTENING. A PRESSURE SENSITIVE BLACK VINYL INSERT CONCEALS SCREW HOLES. OTHER LENGTHS AVAILABLE UPON APPLICATION ON QUANTITY ORDERS.

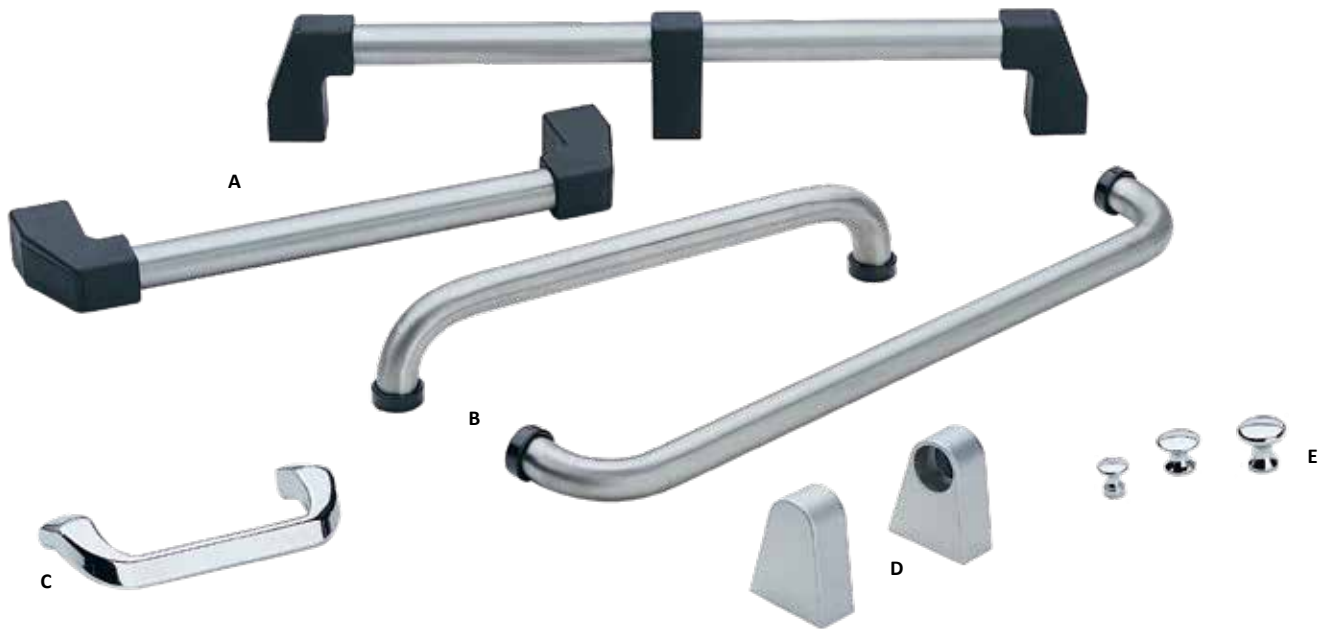

HANDLES & KNOBS

REF. A HANDLE BRACKETS HEAVY-DUTY NYLON


FIBERGLASS REINFORCED END BRACKETS (PR.)
AND CENTER SUPPORT BRACKET (EA.)

IDEAL FOR MOBILE CARTS.
CONCEALED MOUNTING FEATURE. FRONT OR REAR
MOUNT.

TEMPERATURE RANGE TO 300°F (149°C).

MODEL NO. P49-2100
END BRACKET (PAIR)

MODEL NO. P49-2200
CENTER SUPPORT
BRACKET (EACH)

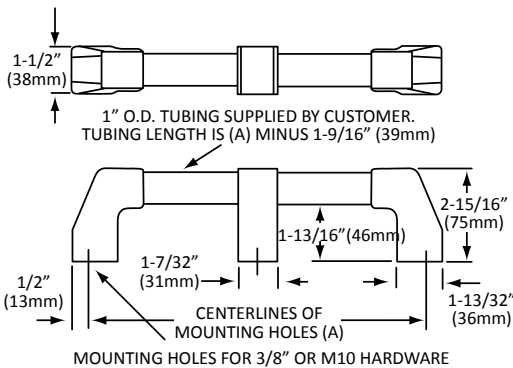

REF. B HEAVY-DUTY TUBULAR HANDLES STAINLESS STEEL, SATIN FINISH


MODEL NO. P47-1012

12-7/8" (327mm) O.A. 12" (305mm) O.C.

MODEL NO. P47-1018


18-7/8" (479mm) O.A. 18" (457mm) O.C.

MATERIAL: 7/8" (22mm)
O.D. STAINLESS STEEL FORMED TUBING

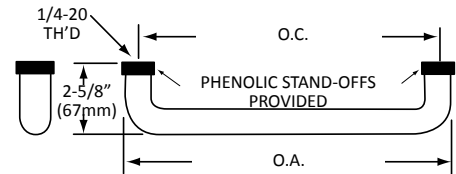

REF. C OFFSET HANDLE CHROME PLATED MODEL NO. P40-1010

MATERIAL: CHROME PLATED DIE CAST METAL

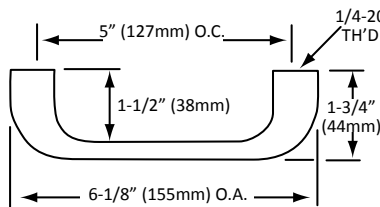


REF. D

HANDLE SUPPORTS ALUMINUM FOR 1" (25mm) O.D. TUBING

EACH SUPPORT IS TAPPED
TO RECEIVE (2) 1/4-20 SCREWS

MODEL NO. P49-1010 (ONE PAIR)

MATERIAL: DIE CAST ALUMINUM
WITH SATIN TEXTURED FINISH

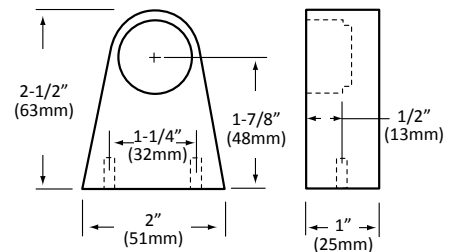


REF. E

CHROME PLATED BRASS KNOBS


ALL KNOBS TAPPED TO
RECEIVE #8-32 SCREWS.




P80-3000




P80-3020



P80-3030



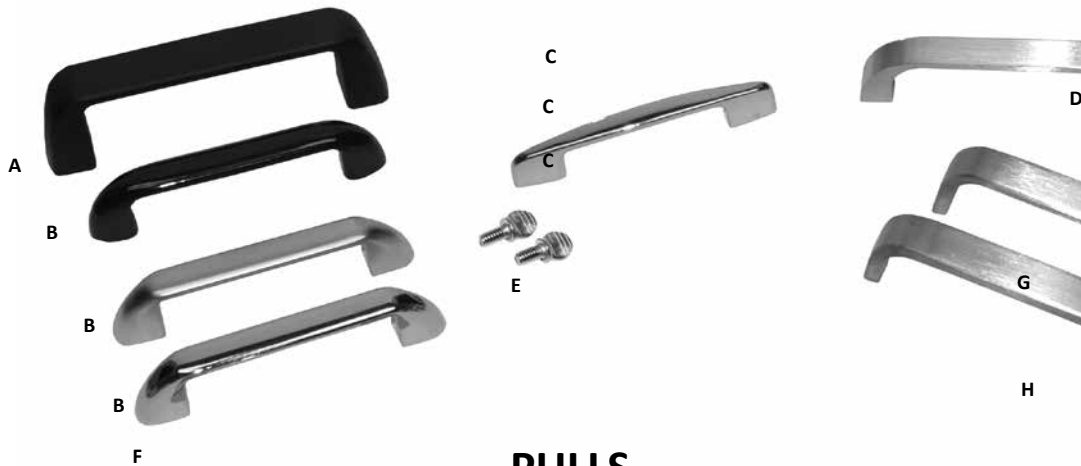


PULLS

REF. A HANDLE BLACK NYLON FIBERGLASS REINFORCED WITH SOLID BRASS TAPPED INSERTS

IDEAL FOR HEATED CABINETS.
RATED TO 300°F (149°C TEMPERATURE).
FULL 1-3/8" GRIP CLEARANCE


MODEL NO. P53-1012

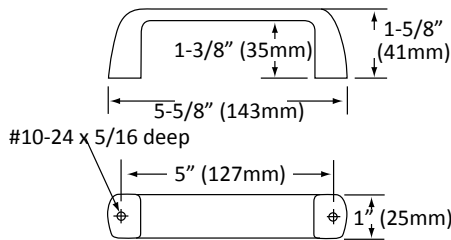

REF. B PULLS DIE CAST OR NYLON


MODEL NO.	MATERIAL	FINISH
P50-1010	Die Cast	Polished Chrome
P50-1011	Die Cast	Buffed Satin
P52-1010*	Nylon	Gloss Black

*FURNISHED WITH THREADED BRASS INSERTS

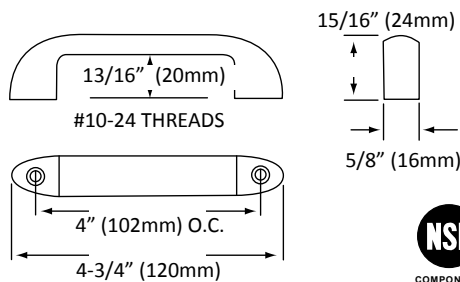


REF. C WIRE PULLS

MODEL NO.	FINISH	"A"
P45-3010	Matte Chrome	3" (76mm)
P45-3510	Matte Chrome	3-1/2" (89mm)
P45-4010	Matte Chrome	4" (102mm)

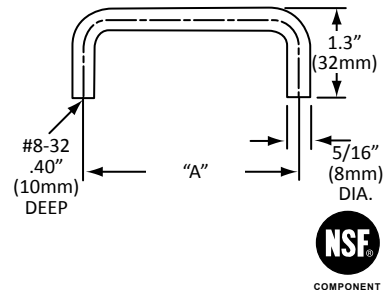


REF. D PULLS ALUMINUM ALLOY SATIN FINISH MODEL NO. P44-1010

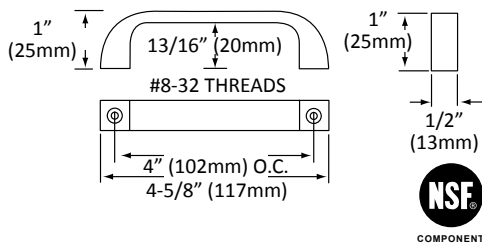


REF. E THUMBSCREW FASTENER STAINLESS STEEL MODEL NO. P51-1024

USED TO MEET NSF REQUIREMENTS
WHERE HANDLES & PULLS MUST BE FASTENED OR REMOVED WITHOUT THE USE OF TOOLS



REF. F PULLS DIE CAST...CHROME PLATED MODEL NO. P51-1010

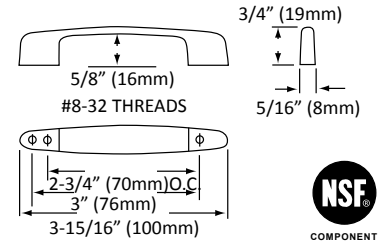



REF. G, H

BAR PULLS, STAINLESS STEEL...SATIN FINISH

MATERIAL: 1/4" (6mm) THICK SOLID STAINLESS STEEL


REF.	MODEL NO. P46-1010	MODEL NO. P46-1012
A	1" (25mm)	1" (25mm)
B	5" (127mm) O.C.	4" (102mm) O.C.
C	5-1/4" (133mm)	4-1/4" (108mm)
D	1-1/4" (32mm)	1-1/4" (32mm)
E	5/8" (16mm)	5/8" (16mm)

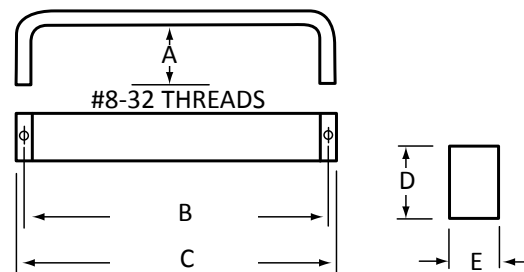

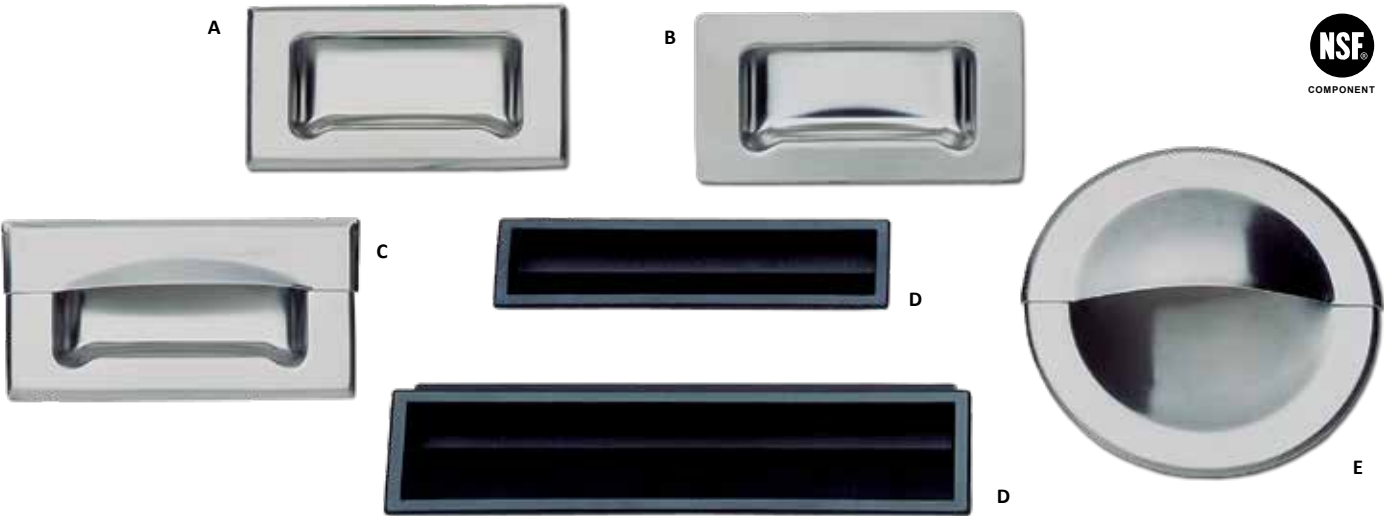


RECESSED PULLS


REF. A
DOOR PULL
STAINLESS STEEL
WITH FRAME BEVELED EDGE
MODEL NO. P62-1010
RETAINING LOCKNUTS PROVIDED

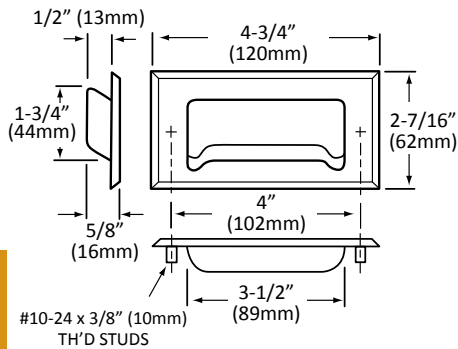

REF. B
DOOR PULL
STAINLESS STEEL
FLUSH TYPE FOR WELDING
MODEL NO. P62-1014

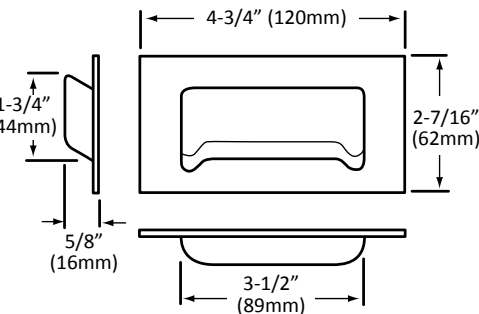


REF. C
DRAWER PULL
STAINLESS STEEL
FULL GRIP TYPE WITH
FRAME BEVELED EDGE
MODEL NO. P63-1012
RETAINING LOCKNUTS PROVIDED

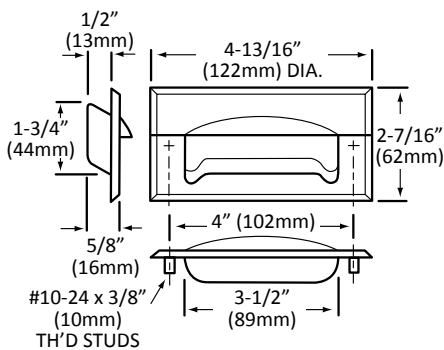

REF. D
RECESSED DOOR PULL
• BLACK ABS THERMOPLASTIC
• SHOCK RESISTANT • SNAP-IN STYLE
ONE PIECE CONSTRUCTION FOR FAST, EFFICIENT INSTALLATION

MODEL NO.	GA.	A	B	C	D	E	F
P73-1000	18	5" (127mm)	5-7/16" (138mm)	1" (25mm)	1-7/16" (37mm)	1-9/16" (40mm)	5/8" (16mm)
P73-2000	22	7" (178mm)	7-7/16" (189mm)	1-5/16" (33mm)	1-3/4" (44mm)	2-1/16" (52mm)	7/8" (22mm)

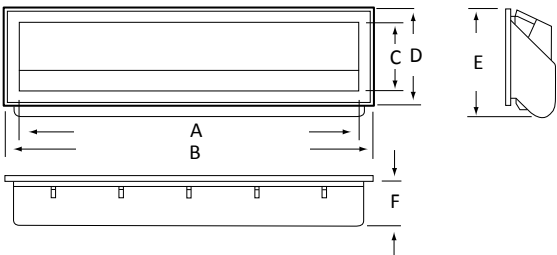

FEMALE STUD
CONVERTS MALE
STUD TO FEMALE


IDEAL FOR USE ON
WOOD CABINETS




#10-24 TH'D X 5/8"
(16mm) LG.

**MODEL NO.
P50-5000**

REF. E
ROUND PULL
STAINLESS STEEL
WITH BEVELED EDGE MOUNT
MODEL NO. P60-1010
RETAINING LOCKNUTS PROVIDED

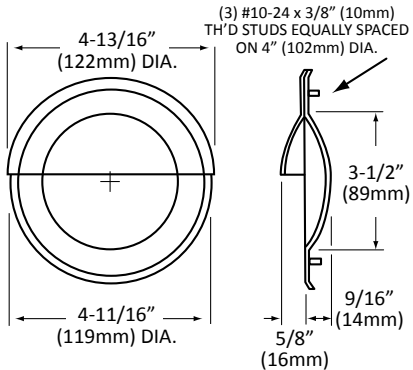

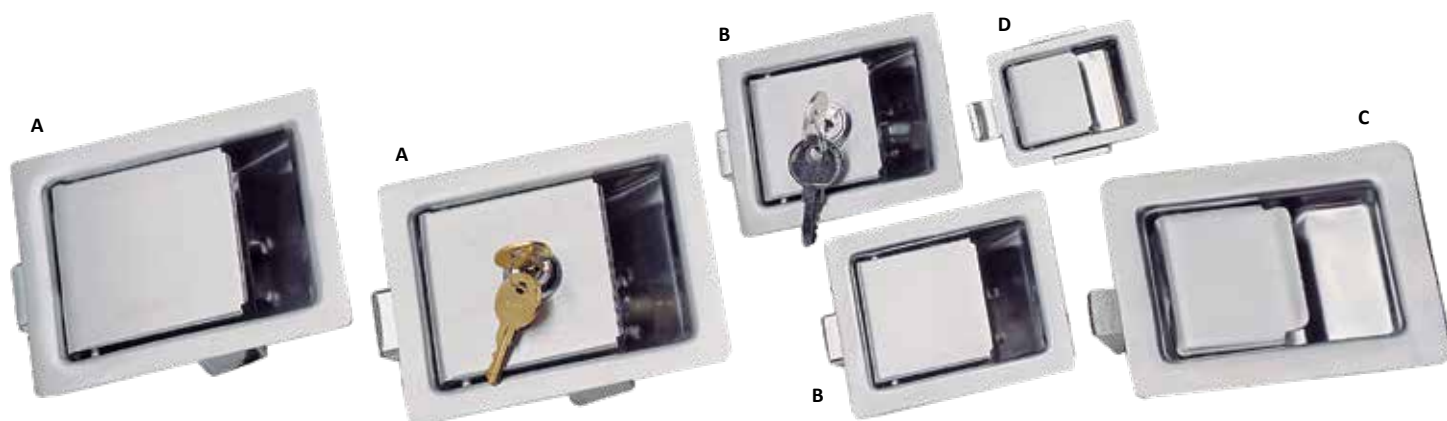

HEAVY- DUTY STAINLESS STEEL PADDLE LATCHES




- BRUSHED STAINLESS STEEL FINISH
- RUGGED ALL STAINLESS CONSTRUCTION
- ALLOWS FOR CLEAN, FLUSH MOUNTING
- CONVENIENT SIZE LATCHES OFFER A WIDE RANGE OF APPLICATION
- ECONOMICALLY PRICED
- UNIQUE REAR MOUNTING BRACKET PROVIDES FAST INSTALLATION
- IDEAL FOR MOBILE CARTS AND ACCESS DOORS WHERE CONVENTIONAL SURFACE MOUNTED HARDWARE IS INAPPROPRIATE

REF. A
MODEL NO. P90-5000-C
WITH LOCK


MODEL NO. P90-5000
W/O LOCK

REF. B
MODEL NO. P90-2000-C
WITH LOCK



MODEL NO. P90-2000
W/O LOCK

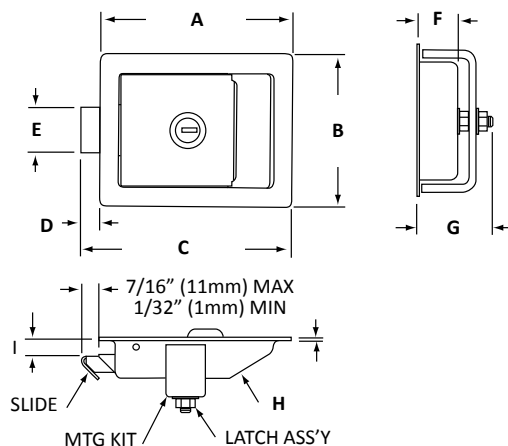


REF. C
MODEL NO. P91-5000

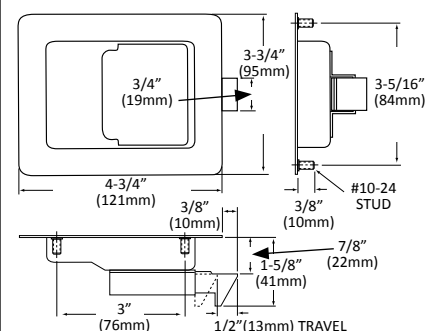

REF. D
MODEL NO. P90-1000

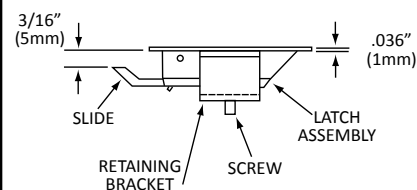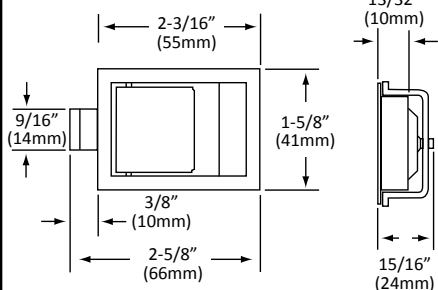

REF.	MODEL NO.	A	B	C	D	E	F	G	H	I
A	P90-5000	5"	4"	5-3/8"	1/2"	1-5/32"	1-1/32"	1-29/32"	.63"	7/16"
	P90-5000-C	(127mm)	(102mm)	(137mm)	(13mm)	(29mm)	(26mm)	(48mm)	(16mm)	(11mm)
B	P90-2000	3-5/16"	2-11/16"	3-5/8"	5/16"	3/4"	3/4"	1-13/32"	.048"	5/16"
	P90-2000-C	(84mm)	(68mm)	(92mm)	(8mm)	(19mm)	(19mm)	(36mm)	(2mm)	(8mm)

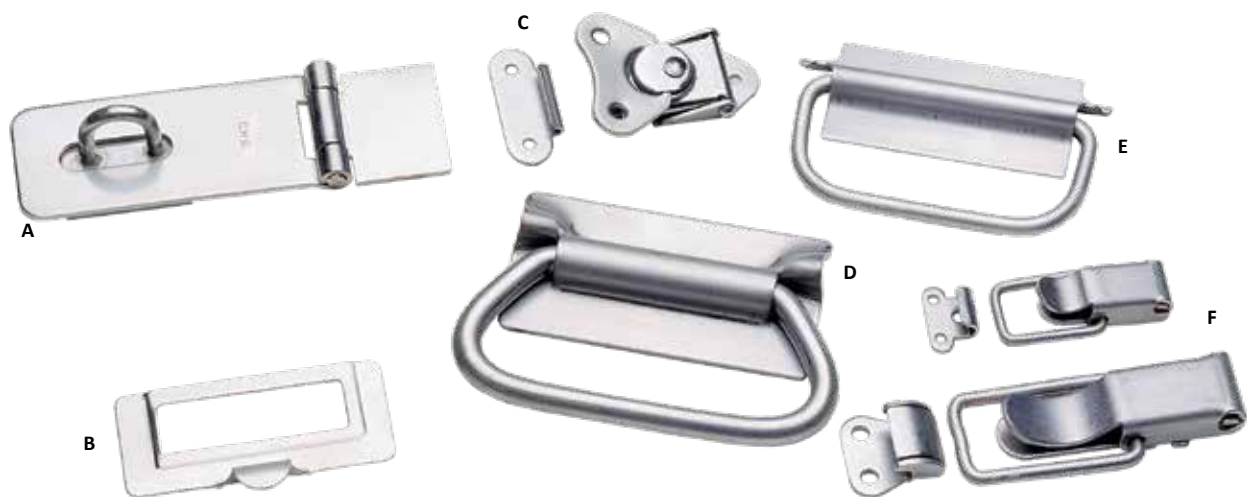

PULLS & CATCHES

REF. A

HASP & STAPLE, STAINLESS STEEL

MODEL NO. M80-2500
2-1/2" x 1" x .072
(63mm x 25mm x 2mm)

REF. B

CARDHOLDER & PULL, STAINLESS STEEL

MODEL NO. P88-1010
OVERALL SIZE:
2-15/16" x 1-5/16" (74mm x 33mm)
CARD SIZE:
2-1/8" x 1-1/8" (54mm x 28mm)

REF. C

LINK-LOCKING LATCH, STAINLESS STEEL

MODEL NO. M11-8201
HEIGHT: 2-1/4" (57mm)
WIDTH: 1-7/16" (36mm)
PROFILE: 1/2" (12mm)
PULL DOWN PRESSURE: 90 lbs (41kg)
LOAD CAPACITY: 300 lbs (136kg)

1-7/16" (36mm)
15/16" (23mm)
2-1/4" (57mm)
2-1/32" (51mm)

REF. D

HEAVY DUTY, STRAIGHT BACK DROP HANDLE, STAINLESS STEEL

3-3/8" (86mm)
1-3/4" (44mm)
1-1/4" (32mm)
4" (102mm)
9/16" (14mm)
2-3/4" (70mm)
5/16" (8mm)

MODEL NO. P68-1010

REF. E

STRAIGHT BACK DROP HANDLE, STAINLESS STEEL

3-1/2" (89mm)
2-1/4" (57mm)
1-1/4" (32mm)
3-3/8" (86mm)
3/8" (8mm)
1-3/8" (35mm)
1/4" (6mm)

MODEL NO. P70-1010

REF. F

DRAWER-TITE ACTION CATCHES STAINLESS STEEL

MODEL NO.	LENGTH	WIDTH	HOLES
M10-8332	2-1/4" (57mm)	1" (25mm)	.132 (3mm)
M10-8333	3-3/8" (86mm)	1-1/4" (32mm)	.195 (5mm)

M10-8333

9/16" (15mm)
13/64" (5mm)
3-1/2" (91mm)
1-1/4" (32mm)

M10-8332

17/32" (14mm)
9/64" (4mm)
2-1/4" (57mm)
15/16" (24mm)




CABINET LATCHES, HANDLES LATCHES & CONTINUOUS HINGES

REF. A

CABINET LATCHES


- PROVIDED WITH FLUSH, 1/8" (3mm) and 3/8" (10mm) KEEPERS
- CHROME PLATED DIE CAST ZAMAK

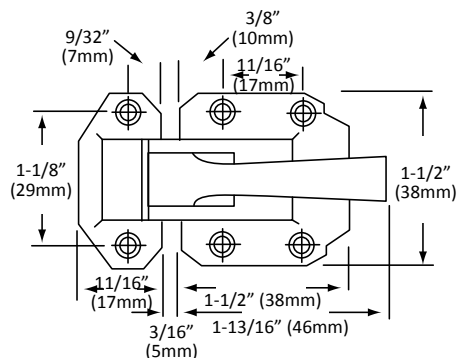

STANDARD DUTY

- MOUNTING HOLES Ø.150 THRU WITH Ø.279 X 82° CSK
- TOTAL 6 MOUNTING HOLES
- MOUNTING HOLES TO SUIT #6 FLAT HEAD SCREW

MODEL NO. M15-9210

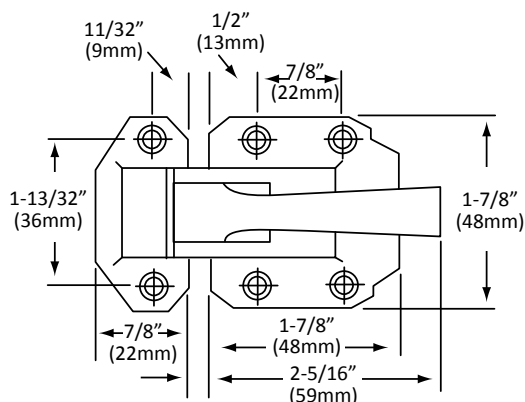

HEAVY DUTY

- MOUNTING HOLES Ø.177 THRU WITH Ø.332 X 82° CSK
- TOTAL 6 MOUNTING HOLES
- MOUNTING HOLES TO SUIT #8 FLAT HEAD SCREW


MODEL NO. M15-9211

REF. B

CONTINUOUS HINGE STAINLESS STEEL WITH STAINLESS STEEL PIN

MODEL NO.	WIDTH	LENGTH	GAUGE	PIN DIA.
M48-0112	3/4" (19mm)	72" (1829mm)	.035 (0.9mm)	.086 (2.2mm)
M48-0121	1-1/16" (27mm)	72" (1829mm)	.035 (0.9mm)	.086 (2.2mm)
M48-0122	1-1/16" (27mm)	72" (1829mm)	.040 (1.0mm)	.086 (2mm)
M48-0131	1-1/2" (38mm)	72" (1829mm)	.035 (0.9mm)	.090 (2.3mm)
M48-0132	1-1/2" (38mm)	72" (1829mm)	.040 (1.0mm)	.090 (2.3mm)
M48-0142	2" (51mm)	72" (1829mm)	.040 (1.0mm)	.120 (3mm)
M48-0143	2" (51mm)	72" (1829mm)	.050 (1.3mm)	.120 (3mm)
M48-0144	2" (51mm)	72" (1829mm)	.060 (1.5mm)	.120 (3mm)
M48-0134	1-1/2" (38mm)	72" (1829mm)	.060 (1.6mm)	.125 (3.2mm)


NOTE: HINGE FURNISHED WITHOUT HOLES. OTHER SIZES AVAILABLE UPON REQUEST.

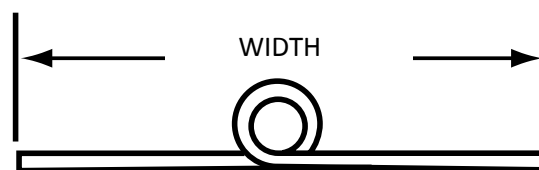

LIFT-OFF HINGES



LIFT-OFF FLAG HINGE, STAINLESS STEEL

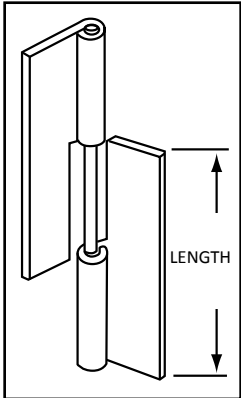

RIGHT HAND HINGE ILLUSTRATED

MODEL NO.	LENGTH	OPEN	GAUGE	PIN DIA.	HAND
R74-8000-RH	2" (51mm)	1-3/4" (44mm)	.075 (2mm)	3/16" (5mm)	R.H.
R74-8001-LH	2" (51mm)	1-3/4" (44mm)	.075 (2mm)	3/16" (5mm)	L.H.
R74-8100-RH	3" (76mm)	2" (51mm)	.075 (2mm)	3/16" (5mm)	R.H.
R74-8101-LH	3" (76mm)	2" (51mm)	.075 (2mm)	3/16" (5mm)	L.H.
R74-9000-RH	2" (51mm)	1-1/4" (32mm)	.060 (1.6mm)	1/8" (3mm)	R.H.
R74-9001-LH	2" (51mm)	1-1/4" (32mm)	.060 (1.6mm)	1/8" (3mm)	L.H.

NOTES: ALL HINGES ARE FURNISHED WITHOUT HOLES

G

LIFT-OFF FLAG HINGE

- SWEDGED KNUCKLE • NON-HANDED • STAINLESS STEEL and NYLON BEARING
- ELIMINATES MORTISING OF DOOR OR JAMB • MINIMUM DOOR CLEARANCE REQUIRED

STANDARD DUTY


MODEL NO. M75-1002

2-1/16" (52mm) LG. x
1-3/32" (28mm) x .075 (2mm)
3/16" (5mm) PIN DIA.

HEAVY DUTY

MODEL NO. M75-5003

3" (76mm) LG. x
1-3/8" (35mm) x .075 (2mm)
1/4" (6mm) PIN DIA.

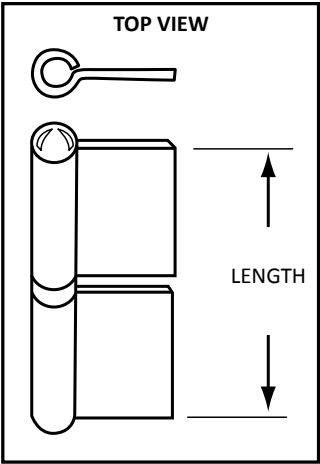




HINGES

REF. A

CONCEALED PIVOT HINGES STAINLESS STEEL


- OBLONG MOUNTING HOLES FOR EASY DOOR ADJUSTMENT
- SELF-LUBRICATING BRONZE PIVOT BUSHING
- REMOVABLE PIVOT PIN ALLOWS DOOR TO BE REMOVED WITHOUT DISASSEMBLING ENTIRE BRACKET
- SUPPLIED AS A SET...REVERSIBLE FOR LEFT OR RIGHT-HANDED DOORS

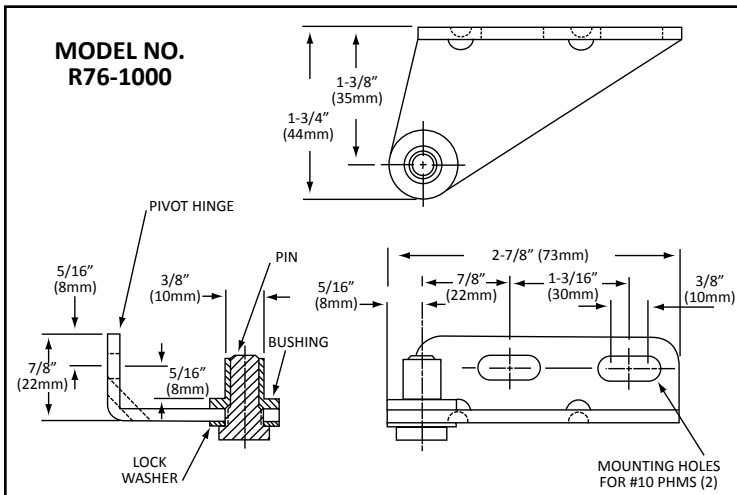

REF. B

RIGHT HAND LATCH HINGES STAINLESS STEEL

LEFT HAND MODELS AVAILABLE ON APPLICATION
TO ORDER, ADD SUFFIX -LH

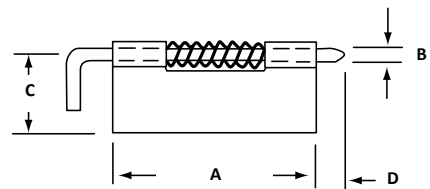

MODEL NO.	A	B	C	D	GAUGE
M12-9293	1-3/8" (35mm)	5/32" (4mm)	3/4" (19mm)	1/4" (6mm)	.040 (.1mm)
M12-9294	2" (51mm)	3/16" (5mm)	7/8" (22mm)	3/8" (10mm)	.050 (1mm)
M12-9295	2-3/4" (70mm)	1/4" (6mm)	1" (25mm)	1/2" (13mm)	.062 (2mm)

REF. C

BUTT HINGES STAINLESS STEEL


MODEL NO. M74-2078

2" (51mm) LG. x 2" (51mm) OPEN x 14 ga (2mm)
.187 (5mm) PIN DIA.

MODEL NO. M74-3078

3" (76mm) LG. x 3" (76mm) OPEN x 14 ga (2mm)
.187 (5mm) PIN DIA.


NOTE: HINGES ARE FURNISHED WITHOUT HOLES.




REF. D

PIVOT HINGES NICKEL PLATED STEEL

SMALL OFFSET MODEL NO. R75-6661

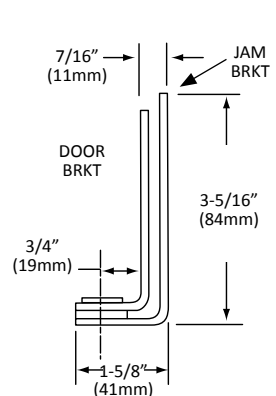

LARGE OFFSET MODEL NO. R75-6662

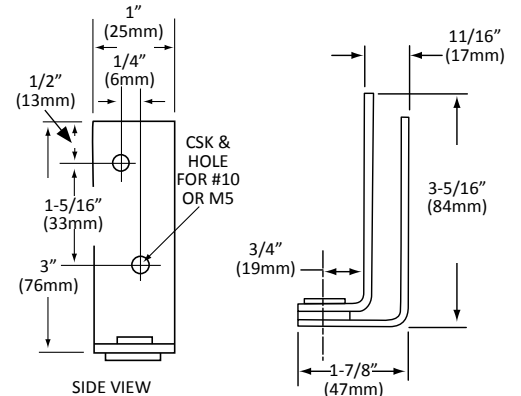




LOCKS

UTILITY LOCKS
STAINLESS STEEL FACED


- DISC TUMBLER
- FOUR BARREL LENGTHS AVAILABLE
- PERMITS MATERIAL THICKNESS TO 1-3/16" (30mm)
- KEY REMOVABLE IN LOCKED OR UNLOCKED POSITION
- FURNISHED WITH TWO KEYS

MODEL NO.	A	B	C	KEYING
P30-4750	9/32" (7mm)	5/8" (16mm)	7/8" (22mm)	Alike
P30-4751	9/32" (7mm)	5/8" (16mm)	7/8" (22mm)	Different
P30-4752	9/32" (7mm)	5/8" (16mm)	7/8" (22mm)	Different & Master Keyed
P30-4760	11/16" (17mm)	7/8" (22mm)	1-1/8" (28mm)	ALIKE
P30-4761	11/16" (17mm)	7/8" (22mm)	1-1/8" (28mm)	Different
P30-4762	11/16" (17mm)	7/8" (22mm)	1-1/8" (28mm)	Different & Master Keyed
P30-4770	15/16" (24mm)	1-1/8" (28mm)	1-3/8" (35mm)	Alike
P30-4771	15/16" (24mm)	1-1/8" (28mm)	1-3/8" (35mm)	Different
P30-4772	15/16" (24mm)	1-1/8" (28mm)	1-3/8" (35mm)	Different & Master Keyed
P30-4780	1-1/8" (28mm)	1-3/8" (35mm)	1-5/8" (41mm)	Alike

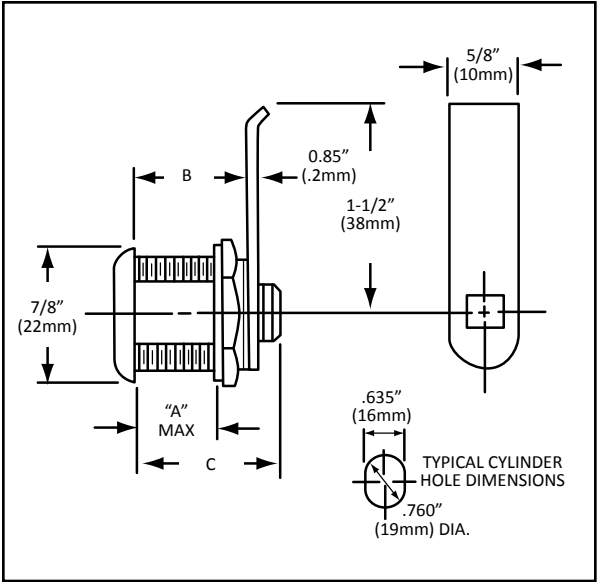

TO ORDER ADDITIONAL KEYS (KEYED-ALIKE-TYPE 802) USE **MODEL NO. P30-0802**
TO ORDER MASTER KEYS USE **MODEL NO. P30-1000**

NOTE: CAMS OPERATE IN 180° SEMI-CIRCLE. 90° OPERATING CAMS AVAILABLE UPON APPLICATION (ALSO AVAILABLE AS KEYED ALIKE IN SERIES). SPUR WASHERS FOR WOOD DRAWERS AVAILABLE ON SPECIAL ORDER.

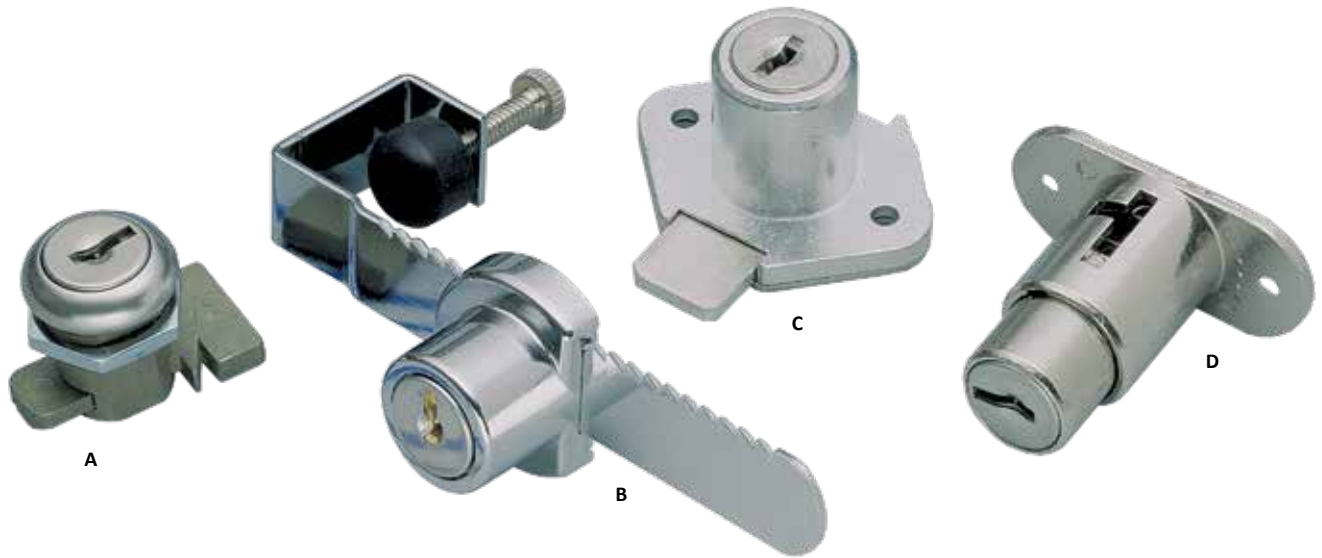


LOCKS

REF. A

T-BOLT LOCK STAINLESS STEEL FACED

- FIVE DISC TUMBLER
- FOR HOLLOW METAL DRAWERS AND FOAMED IN PLACE DOORS
- HEAVY-DUTY VERTICAL DEAD BOLT REMOVABLE FOR INSTALLATION
- FURNISHED WITH TWO BRASS KEYS

MODEL NO. P11-0480

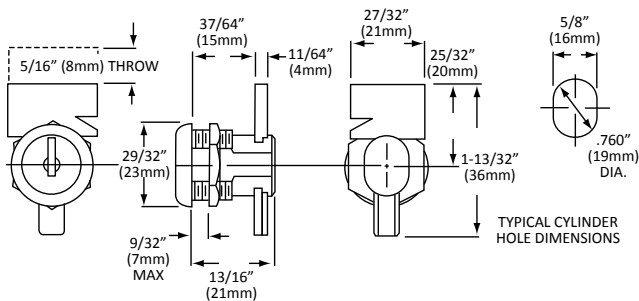


REF. B

SLIDING DOOR LOCK ADJUSTABLE

- POLISHED CHROME FINISH • TAMPERPROOF
- FOR GLASS DOORS UP TO 11/16" (17mm) THICK
- WOOD, WOOD FRAMED, OR METAL DOORS UP TO 1" (25mm) THICK
- RATCHET BAR IS TIGHTENED IN POSITION WITH THUMBSCREW

MODEL NO. P22-0006

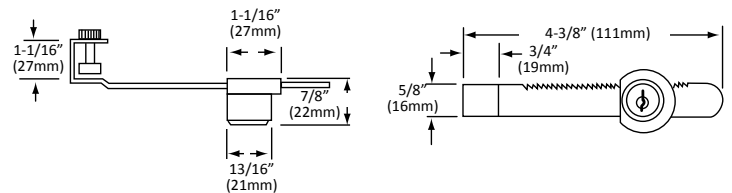


REF. C

DRAWER LOCK

- EASY TO INSTALL
- FIVE DISC TUMBLER
- NON FERROUS SATIN BRASS BARREL AND CASE
- FURNISHED WITH TWO BRASS KEYS

MODEL NO. P10-0370

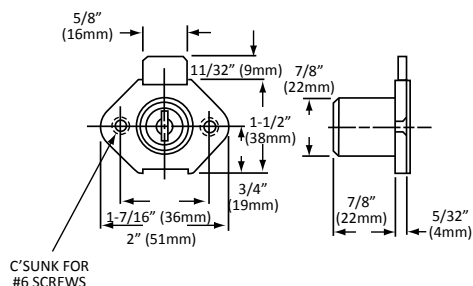



REF. D

PLUNGER LOCK

- NICKEL PLATED • FIVE DISC TUMBLER
- FOR BYPASSING DOORS APPROX. 3/4" (19mm) THICK AND OVER
- SUPPLIED WITH EASY TO INSTALL "PUSH-IN" BOLT RECEIVER
- LOCKING CYLINDER CANNOT BE REMOVED FROM HOUSING WITHOUT KEY

MODEL NO. P20-0490

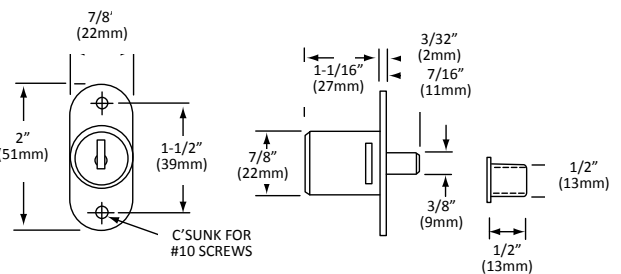


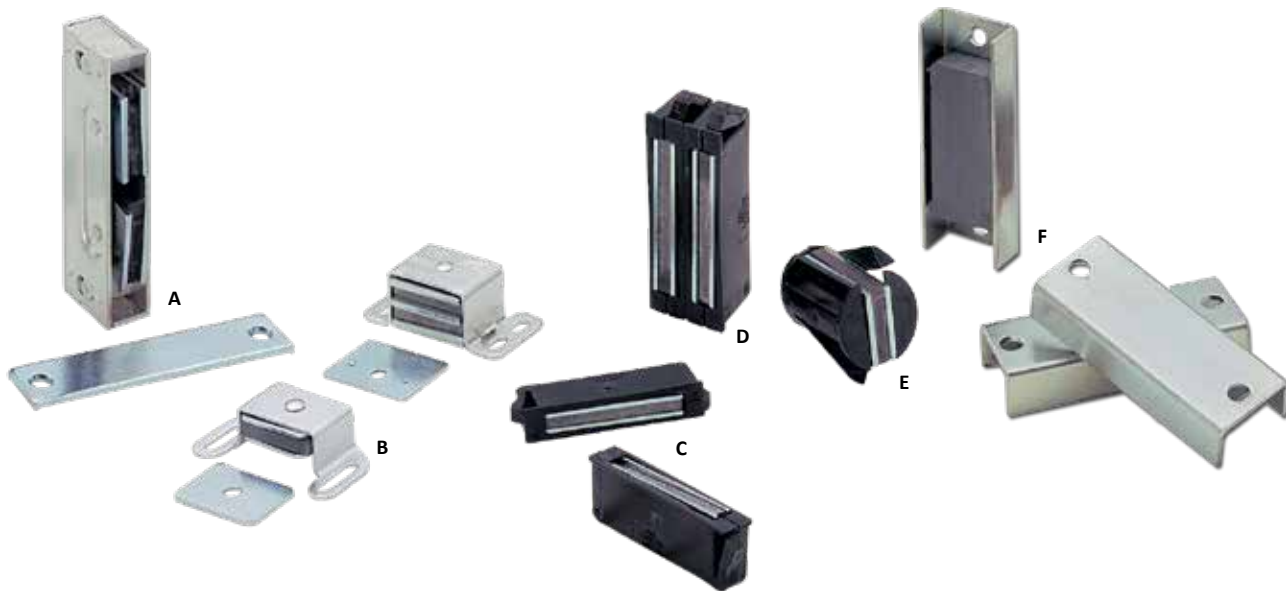

MAGNETIC CATCHES


REF. A
CABINET CATCH
MAGNETIC
HEAVY DUTY
DOUBLE MAGNET
MODEL NO. M32-2401

MATERIAL: ALUMINUM
WITH CONCEALED MAGNETS
30 lbs (13.6 kg) PULL

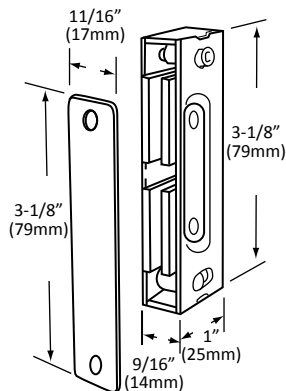


REF. B
CABINET CATCH
MAGNETIC
SINGLE MAGNET
MODEL NO. M30-2400
SIZE: 2" x 1-1/16" x 1/2"
(51mm x 27mm x 13mm)
12 lbs (5 kg) PULL

DOUBLE MAGNET
MODEL NO. M30-5920
SIZE: 2" x 1-1/16" x 3/4"
(51mm x 27mm x 19mm)
20 lbs (9 kg) PULL

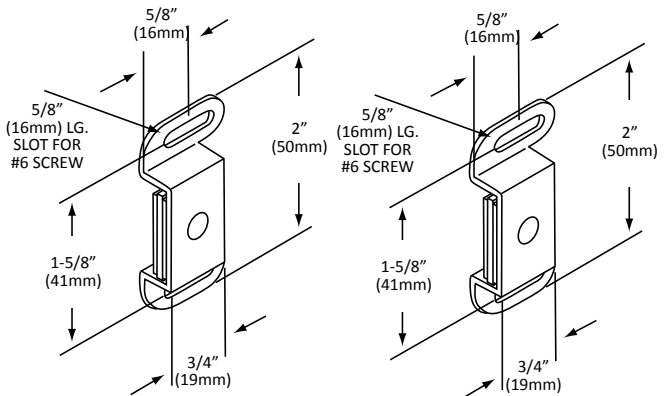


REF. C
CABINET CATCH
MAGNETIC, SNAP-IN TYPE

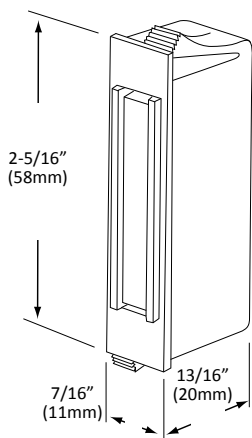

MODEL NO. M36-0201

MATERIAL: BLACK POLYPROPYLENE
WITH CONCEALED MAGNETS
12 lbs (5kg) PULL
CUT OUT DIMENSIONS
2.25" x 0.38"


REF. D
CABINET CATCH
MAGNETIC, SNAP-IN TYPE

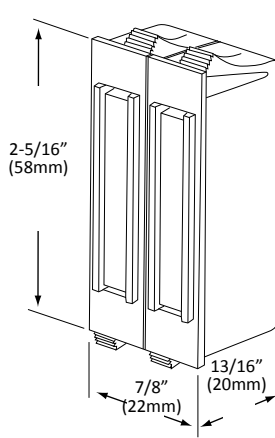

MODEL NO. M36-0801

MATERIAL: BLACK POLYPROPYLENE
WITH CONCEALED MAGNETS
30 lbs (13kg) PULL
CUT OUT DIMENSIONS
2.25" x 0.828"

REF. E
CABINET CATCH
MAGNETIC, SNAP-IN TYPE




NOTE: MTG.
SURFACE
REQUIRES A
7/8" (22mm)
DIA. HOLE

MODEL NO. M36-0611

MATERIAL: BLACK POLYPROPYLENE
WITH CONCEALED MAGNETS
13 lbs (6kg) PULL

REF. F
CABINET CATCH
MAGNETIC, CONCEALED TYPE

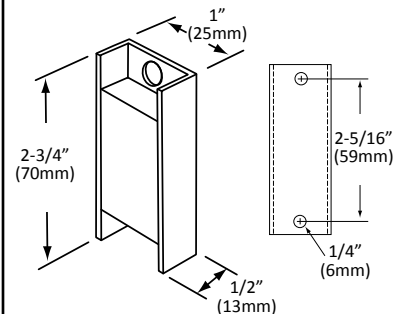

SINGLE CATCH MAGNET
MODEL NO. M35-1000

14 lbs (6kg) PULL
(STEEL BACKING PLATE REQUIRED)

FURNISHED AS SET OF TWO
WITH ATTRACTING POLARITY
FOR A STRONGER PULL
MODEL NO. M35-2000


MATERIAL: ZINC PLATED STEEL WITH
CONCEALED MAGNETS
• 18 lbs (8kg) PULL



MECHANICAL CATCHES

REF. A


DOOR CATCH HEAVY-DUTY ADJUSTABLE TENSION



MODEL NO. M27-2490
8 lbs (3.6kg) PULL
SIZE: 1" X 4" (25mm x 102mm)
MATERIAL: STEEL, NICKEL PLATED

REF. B


DOOR CATCH HEAVY DUTY, 4 WAY* WITH ADJUSTABLE SPRING LOADED BALL TENSION

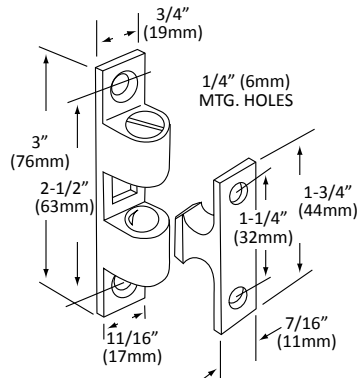

MODEL NO. M22-2430
MATERIAL: SOLID BRASS
WITH SATIN NICKEL FINISH
AND STAINLESS STEEL BALLS
*CATCH MAY BE USED FOR MORTISE
OR SURFACE MOUNT APPLICATION

REF. C


DOOR CATCH STANDARD DUTY WITH ADJUSTABLE SPRING LOADED BALL TENSION

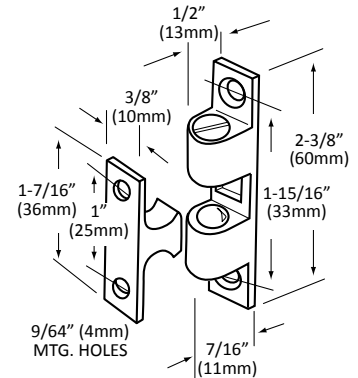

MODEL NO. M22-2420
MATERIAL: SOLID BRASS
WITH SATIN NICKEL FINISH
STAINLESS STEEL BALLS
AND SPRINGS

REF. D


BULLET CATCHES WITH FIXED TENSION



MODEL NO. M25-9469
SIZE: 3/8" X 7/16" (10mm x 11mm)
DIA. x LENGTH
MATERIAL: STEEL, NICKEL PLATED
FURNISHED WITH STRIKE

REF. E


SURFACE BOX CATCH WITH SPRING LOADED NYLON ROLLER

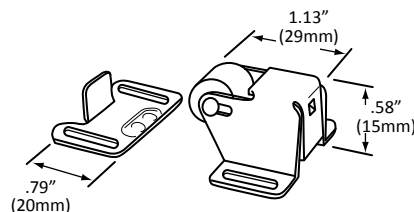

MODEL NO. M24-2260
MATERIAL: ZINC PLATED STEEL

REF. F

CABINET CATCH FRICTION TYPE WITH SPRING ACTION NYLON ROLLERS

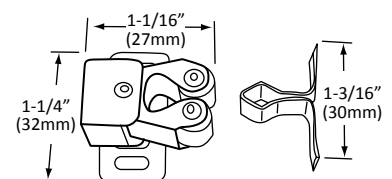

MODEL NO. M21-2580
MATERIAL: ZINC PLATED STEEL



Fully welded end plates with rubber bumper stops

DRAWER SLIDES, EXTRA HEAVY -DUTY

S52 SERIES

- NSF LISTED
- STAINLESS STEEL FULL EXTENSION
- 200 lbs (100 kg) LOAD CAPACITY
- SLIDES AND ROLLERS EASILY REMOVED
- INCLUDES 8 BALL BEARING ASSEMBLIES
- RETAINER PLATES...KEEPS SLIDES IN POSITION EVEN WHEN DRAWERS ARE REMOVED
- FULLY WELDED STOPS

SPECIFICATIONS

MOUNTING SPACE REQUIRED	SIDE 25/32" (20mm)
HEIGHT	2-7/16" (62mm)
DRAWER EXTENSION	FULL TRAVEL
LOAD CAPACITY	200 lbs (100kg) PER PAIR WITH STAINLESS STEEL BEARINGS 150 lbs (68kg) PER PAIR WITH DELRIN BEARINGS
MATERIAL	14 ga (2mm) STAINLESS STEEL
ACTION	SOLID DELRIN OR STAINLESS STEEL BALL BEARING WHEELS WITH REMOVABLE STAINLESS STEEL SCREWS

NOTE: LOAD RATING BASED ON 20"(500mm) SLIDE LENGTH
PACKAGED 6 PAIR PER CARTON


S52 SERIES STAINLESS STEEL FULL EXTENSION DRAWER SLIDES WITH STAINLESS STEEL BEARINGS

MODEL NO.	SIZE
S52-0020	20" (508mm)
S52-0022	22" (559mm)
S52-0024	24" (610mm)
S52-0026	26" (660mm)

S52 SERIES STAINLESS STEEL FULL EXTENSION DRAWER SLIDES WITH DELRIN BEARINGS

MODEL NO.	SIZE
S52-2020	20" (508mm)
S52-2022	22" (559mm)
S52-2024	24" (610mm)
S52-2026	26" (660mm)

NOTE: BOTH MODELS ARE FURNISHED WITH REMOVABLE STAINLESS STEEL THREADED FASTENERS

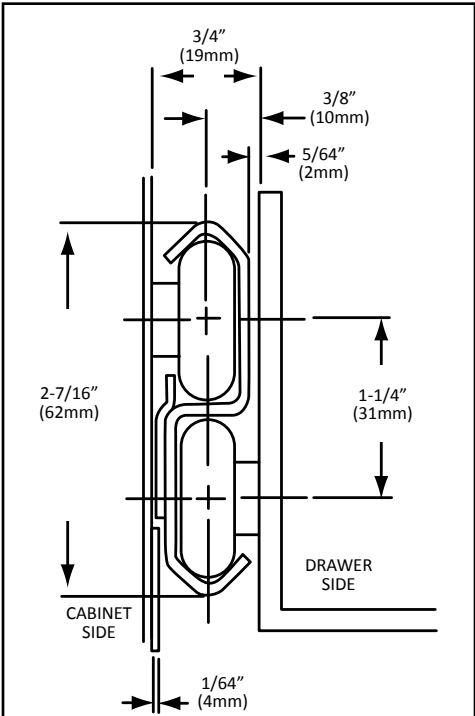

CROSS SECTION
WHEN ORDERING...MEASURE FROM INSIDE FACE TO EXTREME REAR OF DRAWER

NOTE: STAINLESS STEEL BALL BEARING ASSEMBLIES W/REMOVABLE STAINLESS STEEL THREADED FASTENERS (MODEL NO. S52-X001) AND DELRIN BEARING COMPLETE W/REMOVABLE STAINLESS STEEL THREADED FASTENERS (MODEL NO. S52-X101) MAY BE ORDERED SEPARATELY. SEE PAGE G197



S26 STAINLESS STEEL SERIES

- NSF LISTED
- STAINLESS STEEL
- FULL EXTENSION
- 100 lbs (50kg) LOAD CAPACITY
- EASY INSTALLATION
- SLIDES & ROLLERS EASILY REMOVED FOR CLEANING
- INCLUDES (8) S/S BALL BEARING ASSEMBLIES
- RETAINER PLATES...KEEPS SLIDES IN POSITION EVEN WHEN DRAWERS ARE REMOVED
- POSITIVE STOPS

SPECIFICATIONS

MOUNTING	SIDE
SPACE REQUIRED	5/8" (15mm)
HEIGHT	1-27/32" (21mm)
DRAWER EXTENSION	FULL TRAVEL
LOAD CAPACITY	100 lbs (45kg) PER PAIR
ACTION	STAINLESS STEEL BALL BEARING WHEELS WITH REMOVABLE STAINLESS STEEL SCREWS

NOTE: LOAD RATING BASED ON 20" (508mm) SLIDE LENGTH
PACKAGED 10 PAIR PER CARTON

S10 ECONOMICAL SERIES

- NSF LISTED
- ECONOMICAL ZINC PLATED STEEL
- FULL EXTENSION
- 100 lbs (50kg) LOAD CAPACITY
- EASY INSTALLATION
- SLIDES & ROLLERS EASILY REMOVED FOR CLEANING
- INCLUDES (8) BALL BEARING ASSEMBLIES
- RETAINER PLATES...KEEPS SLIDES IN POSITION EVEN WHEN DRAWERS ARE REMOVED
- POSITIVE STOPS

SPECIFICATIONS


MOUNTING	SIDE
SPACE REQUIRED	5/8" (15mm)
HEIGHT	1-27/32" (21mm)
DRAWER EXTENSION	FULL TRAVEL
LOAD CAPACITY	100 lbs (45kg) PER PAIR
MATERIAL	COLD ROLLED ZINC PLATED STEEL
ACTION	ZINC PLATED STEEL BALL BEARING WHEELS WITH REMOVABLE ZINC PLATED STEEL SCREWS

NOTE: LOAD RATING BASED ON 20" (508mm) SLIDE LENGTH
PACKAGED 10 PAIR PER CARTON

S26 SERIES STAINLESS STEEL FULL EXTENSION DRAWER SLIDES WITH STAINLESS STEEL BEARINGS

MODEL NO.	SIZE
S26-0014	14" (356mm)
S26-0016	16" (406mm)
S26-0018	18" (457mm)
S26-0020	20" (508mm)
S26-0022	22" (559mm)
S26-0026	26" (660mm)

NOTE: STAINLESS STEEL BALL BEARING
ASSEMBLIES WITH REMOVABLE
STAINLESS STEEL THREADED
FASTENERS MAY BE ORDERED SEPARATELY.
SEE PG. G197 (MODEL NO. S26-Y001)

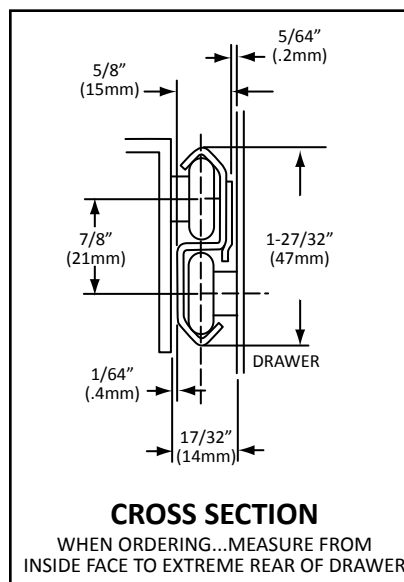

S10 SERIES ZINC PLATED FULL EXTENSION DRAWER SLIDES WITH ZINC PLATED BEARINGS

MODEL NO.	SIZE
S10-0014	14" (356mm)
S10-0018	18" (457mm)
S10-0020	20" (508mm)
S10-0022	22" (559mm)
S10-0024	24" (610mm)
S10-0026	26" (660mm)

NOTE: ZINC PLATED STEEL BALL BEARING
ASSEMBLIES WITH REMOVABLE
ZINC PLATED STEEL THREADED
FASTENERS MAY BE ORDERED SEPARATELY.
SEE PG. G197 (MODEL NO. S10-Y001)



S25 STAINLESS STEEL DRAWER SLIDES

S25 SERIES

- NSF LISTED
- STAINLESS STEEL
- BALL BEARING ACTION
- 150 lbs (68kg) LOAD CAPACITY
- POSITIVE STOPS
- FINGER TIP LEVER DRAWER RELEASE

SPECIFICATIONS

MOUNTING	SIDE
SPACE REQUIRED	9/16" (14mm)
HEIGHT	3" (76mm)
DRAWER EXTENSION	LENGTH OF SLIDE MINUS 4-1/4" (107mm)
LOAD CAPACITY	150 lbs (68kg) PER PAIR**
ACTION	STAINLESS STEEL BALL BEARING WHEELS WITH REMOVABLE STAINLESS STEEL SCREWS


PACKAGED 10 PAIR PER CARTON

*S25 SERIES STAINLESS STEEL
DRAWER SLIDES WITH
STAINLESS STEEL BEARINGS

MODEL NO.	SIZE
S25-0014	14" (356mm)
S25-0016	16" (406mm)
S25-0018	18" (457mm)
S25-0020	20" (508mm)
S25-0022	22" (559mm)
S25-0024	24" (610mm)
S25-0026	26" (660mm)
S25-0028	28" (711mm)

*S25 SERIES STAINLESS STEEL
DRAWER SLIDES WITH S/S
BEARINGS W/ NYLON TIRE

MODEL NO.	SIZE
S25-2014	14" (356mm)
S25-2016	16" (406mm)
S25-2020	20" (508mm)
S25-2022	22" (559mm)
S25-2028	28" (711mm)

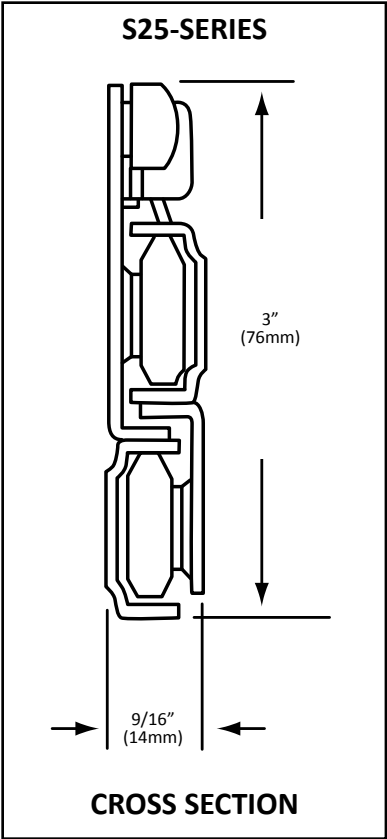

*EQUIVALENT TO STANDARD-KEIL SERIES 1425
**LOAD RATING BASED ON 18" (457mm) SLIDE LENGTH
NOTE: WHEN ORDERING, MEASURE FROM INSIDE FACE TO EXTREME REAR OF DRAWER



DRAWER SLIDES, 1/2" (13mm) CLEARANCE

S15 SERIES

- ZINC PLATED STEEL
- 75 lbs (40kg) LOAD CAPACITY
- ALLOWS DRAWER TO BE EASILY REMOVED

SPECIFICATIONS

MOUNTING

SPACE REQUIRED

HEIGHT

DRAWER EXTENSION

LOAD CAPACITY

MATERIAL

ACTION

ADDITIONAL

SIDE

1/2" (13mm)

3" (76mm)

LENGTH OF SLIDE MINUS 4-1/4" (107mm)

75 lbs (40kg) PER PAIR

COLD ROLLED STEEL, ZINC PLATED,
CLEAR CHROMATE

NYLON BALL BEARING ROLLERS

POSITIVE STOPS, FINGER TIP RELEASE,
REMOVABLE



S35 SERIES

- ZINC PLATED STEEL • FULL EXTENSION
- 100 lbs (50kg) LOAD CAPACITY • NO DEFLECTION
- ALLOWS DRAWER TO BE EASILY REMOVED

SPECIFICATIONS

MOUNTING

SPACE REQUIRED

HEIGHT

DRAWER EXTENSION

LOAD CAPACITY

MATERIAL

ACTION

ADDITIONAL

SIDE

1/2" (13mm)

2-3/8" (60mm)

FULL TRAVEL

100 lbs (50kg) PER PAIR

COLD ROLLED STEEL, ZINC PLATED,
CLEAR CHROMATE

FRONT INTERMEDIATE WHEEL: NYLON

ROLLER OUTER CHANNEL ASSEMBLY:


STEEL BALL BEARING

POSITIVE MECHANICAL STOP, FULL
EXTENSION WITH VIRTUALLY NO
DEFLECTION, REMOVABLE

NOTE: LOAD RATING BASED ON 18" (457mm) SLIDE LENGTH
PACKAGED 10 PAIR PER CARTON

S15 SERIES STEEL ZINC PLATED DRAWER SLIDES

MODEL NO.	SIZE
S15-1016	16" (406mm)
S15-1020	20" (508mm)
S15-1022	22" (559mm)

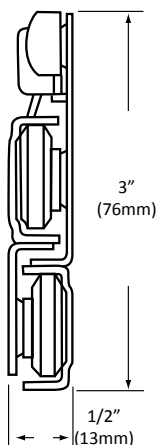


NOTE: WHEN ORDERING, MEASURE FROM INSIDE
FACE TO EXTREME REAR OF DRAWER.

NOTE: LOAD RATING BASED ON 18" (457mm) SLIDE LENGTH
PACKAGED 10 PAIR PER CARTON

S35 SERIES ZINC PLATED STEEL FULL EXTENSION DRAWER SLIDES

MODEL NO.	SIZE
S35-1016	16" (406mm)
S35-1018	18" (457mm)
S35-1020	20" (508mm)
S35-1022	22" (559mm)
S35-1024	24" (610mm)
S35-1026	26" (660mm)

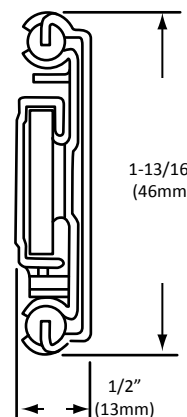

NOTE: WHEN ORDERING, MEASURE FROM INSIDE
FACE TO EXTREME REAR OF DRAWER.



DRAWER SLIDES, 3/4”(19mm) CLEARANCE

S30 SERIES

- ZINC PLATED STEEL
- FULL EXTENSION
- 75 lbs (40kg) LOAD CAPACITY
- ALLOWS DRAWER TO BE EASILY REMOVED

SPECIFICATIONS

MOUNTING	SIDE
SPACE REQUIRED	3/4” (19mm)
HEIGHT	2-1/32” (52mm) WITH ROLLERS
	1-1/4” (32mm) WITHOUT ROLLERS
DRAWER EXTENSION	FULL TRAVEL, CONTROLLED BY ROLLER REPLACEMENT
LOAD CAPACITY	75 lbs (40kg) PER PAIR
MATERIAL	ZINC PLATED STEEL
ACTION	NYLON OR NON-CORROSIVE METAL ROLLERS
ADDITIONAL FEATURES	NON-HANDED, REMOVABLE (WITH ROLLERS), RUBBER STOPS


NOTE: LOAD RATING BASED ON 18”(450mm) SLIDE LENGTH
PACKAGED 10 PAIR PER CARTON

S30 SERIES ZINC PLATED STEEL
FULL EXTENSION DRAWER SLIDES

SIZE	MODEL NO. WITH NYLON ROLLERS	MODEL NO. WITH METAL ROLLERS	MODEL NO. WITHOUT ROLLERS
18”(457mm)	—	—	S30-2018
20”(508mm)	S30-1020	—	—
22”(559mm)	—	S30-3022	S30-2022
24”(610mm)	—	—	—

ACCESSORIES:
S30-Y001

NYLON ROLLER (EA)
(4 rollers required per pair)

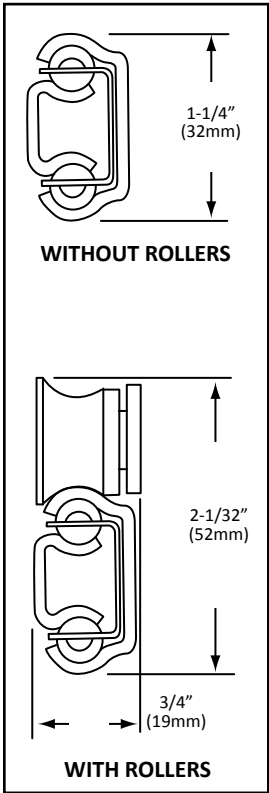

G



DRAWER PANS



DRAWER PANS STAINLESS STEEL

- STAINLESS STEEL WITH POLISHED FINISH
- COVED CORNERS • TWO SIZES AVAILABLE
- FOR USE IN FOOD SERVICE TABLES AND FOOD WARMERS
- IDEAL FOR UTENSILS AND FROZEN FOOD STORAGE
- MEETS NSF CRITERIA

STAINLESS STEEL DRAWER PANS

MODEL NO.	NOMINAL DIMENSIONS	FLANGE SIZE
S81-1520-C	15" x 20" x 5" (381mm x 508mm x 127mm)	16 x 21-1/2" (406mm x 546mm)
S81-2020-C	20" x 20" x 5" (508mm x 508mm x 127mm)	21-1/2" x 21-1/2" (546mm x 546mm)

PACKAGED 6 TO A MASTER CARTON
NOTE: OTHER DEPTHS AVAILABLE UPON APPLICATION.

G


DRAWER PANS HEAVY-DUTY THERMOPLASTIC

HEAVY-DUTY THERMOPLASTIC DRAWER PANS

MODEL NO.	NOMINAL DIMENSIONS	FLANGE SIZE
S80-1520	15" x 20" x 5" (381mm x 508mm x 127mm)	16-1/4" x 21-3/4" (415mm x 550mm)
S80-2020	20" x 20" x 5" (508mm x 508mm x 127mm)	21-3/4" x 21-3/4" (550mm x 550mm)

PACKAGED 6 TO A MASTER CARTON

Stainless Steel Drawer Assembly

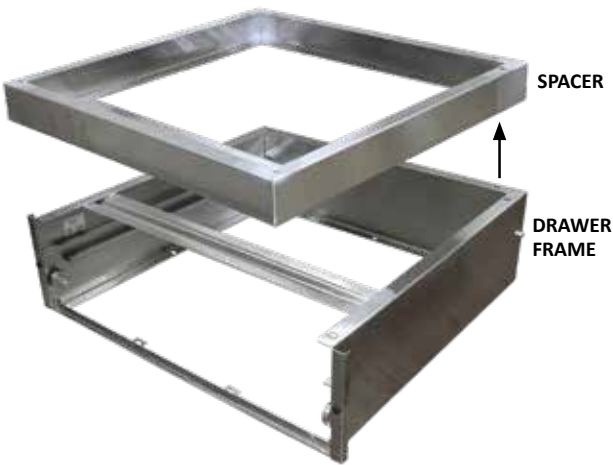

HEAVY DUTY S90/SE90 SERIES STAINLESS STEEL DRAWER ASSEMBLIES

- STAINLESS STEEL, WELDED CONSTRUCTION THROUGHOUT
 - S90 HEAVY DUTY 19 GA. OUTER DRAWER HOUSING WITH 17 GA. INTERNAL FRAME ASSEMBLY AND FRONT PANEL
 - SE90 MEDIUM DUTY 20 GA. OUTER DRAWER HOUSING WITH 19 GA. INTERNAL FRAME ASSEMBLY AND FRONT PANEL
 - UNIQUE UNI-BODY CONSTRUCTION ALLOWS UNITS TO BE STACKED
 - CONVENIENT, PRECISE MOUNTING HOLES OFFER QUICK, EASY INSTALLATION
- 200 lb CAPACITY
 - SELF-CLOSING DRAWER FEATURE
 - ENTIRE DRAWER ASSEMBLY DEBURRED AND READY TO INSTALL
 - COMPLETE WITH HEAVY GAUGE REMOVABLE STAINLESS STEEL OR PLASTIC PAN
 - FULL EXTENSION- 90° PULL ALLOWS CONVENIENT ACCESS AND IS EASY TO KEEP CLEAN
 - AVAILABLE WITH OR WITHOUT CYLINDER LOCK ASSEMBLY
 - SPECIFICATION GRADE, MEETS MOST ARCHITECTURAL REQUIREMENTS

15" S/S DRAWER ASSEMBLY

MODEL NO.	DESCRIPTION	LOCK	PAN
*S90-0015-N	15" (381mm) Pan	-	S/S
*SE90-0015-N			
*S90-0015-C-N	15" (381mm) Pan	Cylinder	S/S
*SE90-0015-C-N			

20" S/S DRAWER ASSEMBLY

MODEL NO.	DESCRIPTION	LOCK	PAN
*S90-0020-N	20" (508mm) PAN	-	S/S
*SE90-0020-N			
*S90-0020-C-N	20" (508mm) PAN	Cylinder	S/S
*SE90-0020-C-N			

STAINLESS STEEL SPACER (OPTIONAL)

MODEL NO.	DESCRIPTION
S90-X032	20" x 20" x 2-1/2" (508mm x 508mm x 64mm)
S90-X033	15" x 20" x 2-1/2" (381mm x 508mm x 64mm)


*USED TO DROP THE DRAWER BELOW NORMAL 2" RETURN ON TABLE TOP OR AS A MULLION BETWEEN DRAWERS



STAINLESS STEEL ROLLER BEARING FOR DRAWER ASSEMBLY
MODEL NO. S90-X004

DRAWER DIMENSIONS

MODEL NO.		A	B	C	D
S90-0015	DIM. FOR	17-3/4"	16-1/2"	13-5/8"	19-5/16"
SE90-0015	15" ASS'Y	(451mm)	(419mm)	(346mm)	(497mm)
S90-0020	DIM. FOR	23-3/8"	22-1/8"	19-1/4"	25-1/16"
SE90-0020	20" ASS'Y	(594mm)	(562mm)	(489mm)	(636mm)

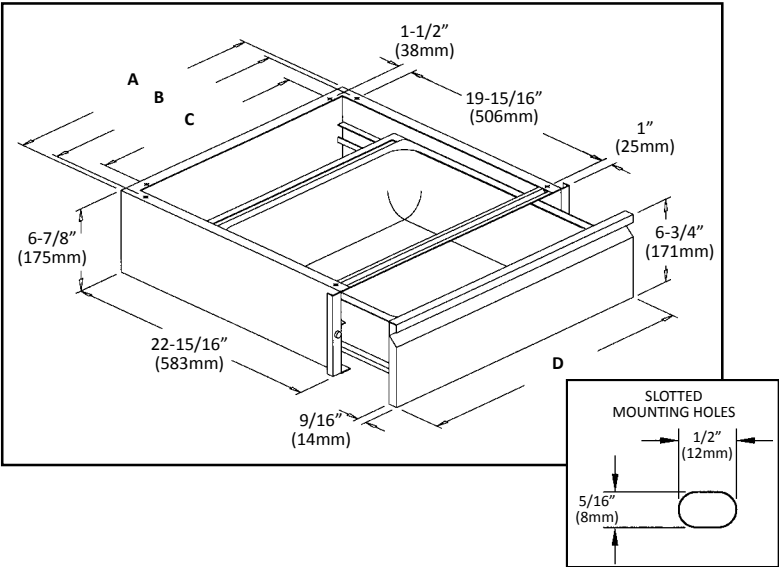



A



B


STAINLESS STEEL CASH DRAWER ASSEMBLY

REF. A

CASH DRAWER ASSEMBLY WITH TRAY

MODEL NO. S95-1000

- STAINLESS STEEL SPECIFICATION GRADE CASH DRAWER ASSEMBLY
 - SOLID STAINLESS STEEL CONSTRUCTION
- FULL EXTENSION DRAWER SLIDE OFFERS EASE OF OPERATION
- ALL DRAWERS FURNISHED WITH STAINLESS STEEL FACED CYLINDER LOCKS DESIGNED FOR EASY UNDERCOUNTER MOUNTING
 - SMOOTH AND QUIET OPERATION

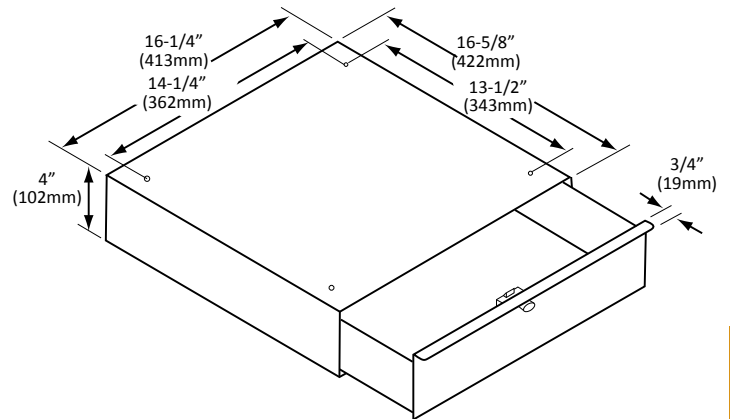

REF. B

CURRENCY TRAY WITH COVER

MODEL NO. S95-Y002

- REMOVABLE CURRENCY TRAY WITH DROP HANDLE FOR EASY REMOVAL
- DESIGNED TO ACCOMMODATE PORTABLE CASH NEEDS-IDEAL FOR DRAWERS, SAFES AND DESKS
- POSITIVE SPRING ACTION MONEY HOLD DOWN
 - LOCK WITH STAINLESS STEEL CYLINDER

STAINLESS STEEL CASH DRAWER LESS CURRENCY TRAY

MODEL NO. S95-Y001

G




BLACK POWDER COATED CASH DRAWER ASSEMBLY

REF. A

CASH DRAWER ASSEMBLY WITH TRAY

MODEL NO. CD-1000

- BLACK POWDER COATED FINISH
- CENTER SECURITY DRAWER KEY-LOCK
- STANDARD ABS PLASTIC 5 COIN/5 BILL REMOVABLE MONEY TRAY INSERT • ADJUSTABLE BILL SEPARATOR FOR FOREIGN CURRENCY • STAINLESS STEEL MONEY CLIPS
- STAINLESS STEEL COIN BREAKING PLATE • SLOTS ON DRAWER FACE FOR CHECKS/RECEIPTS/COUPONS
- DRAWER BELL • NON-SKID 1/2" RUBBER FEET

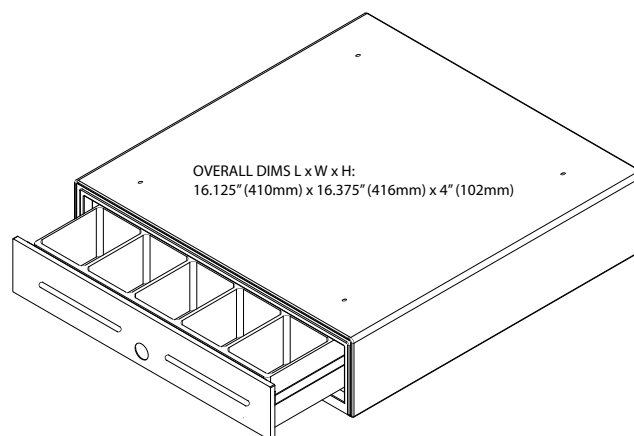

REF. B

REPLACEMENT CURRENCY TRAY

MODEL NO. CD-Y004

- STANDARD ABS PLASTIC 5 COIN/5 BILL REMOVABLE MONEY TRAY INSERT • ADJUSTABLE BILL SEPARATOR FOR FOREIGN CURRENCY • STAINLESS STEEL MONEY CLIPS

KEY FOR CASH DRAWER ASSEMBLIES -

MODEL NO. S95-Y001-KEY

KEY FOR CURRENCY TRAY ASSEMBLIES -

MODEL NO. S95-Y002-KEY



BUMPERS & GROMMETS

RECESSED BUMPERS

FIG.	MODEL NO.	A	B	C	D	E	F
1	Q20-2081	5/8" (16mm)	5/16" (8mm)	3/16" (5mm)	1/8" (3mm)	1/4" (6mm)	3/16" (5mm)
2	Q20-2095	15/16" (24mm)	3/8" (10mm)	1/8" (3mm)	3/16" (5mm)	3/8" (10mm)	5/32" (4mm)

GROMMETS

FIG.	MODEL NO.	A	B	C	D	E
3	Q24-0220	9/16" (14mm)	1/4" (6mm)	1/4" (6mm)	1/16" (2mm)	3/8" (10mm)
3	Q24-0225	5/8" (16mm)	3/8" (10mm)	1/4" (6mm)	1/16" (2mm)	1/2" (13mm)
3	Q24-0230	13/16" (20mm)	1/2" (13mm)	9/32" (7mm)	1/16" (2mm)	5/8" (16mm)
4	Q24-0320	9/16" (14mm)	1/4" (6mm)	5/16" (8mm)	1/8" (3mm)	3/8" (10mm)

LARGE DIAMETER GROMMETS


FIG.	MODEL NO.	A	B	C	D	E
5	Q24-0420	1-7/8" (48mm)	1-1/8" (29mm)	3/8" (10mm)	1/16" (2mm)	1-1/2" (38mm)
5	Q24-0520	2-7/8" (75mm)	2-1/8" (54mm)	7/16" (11mm)	1/16" (2mm)	2-1/2" (64mm)

BUTTON BUMPERS

FIG.	MODEL NO.	A	B	C	D	E	F
6	Q26-3062	3/8" (10mm)	1/4" (6mm)	1/4" (6mm)	5/16" (8mm)	3/64" (1mm)	3/64" (1mm)
6	Q26-4071	1/2" (13mm)	3/8" (10mm)	3/16" (5mm)	1/8" (3mm)	1/16" (2mm)	1/16" (2mm)
7	Q26-4072	1/2" (13mm)	3/8" (10mm)	3/16" (5mm)	3/16" (5mm)	3/16" (5mm)	1/16" (2mm)

PRESSURE SENSITIVE BUMPERS

FIG.	MODEL NO.	HEIGHT	DIAMETER
8	Q21-5003	.20" (5mm)	.44" (11mm)
8	Q21-5017	.38" (10mm)	.75" (20mm)

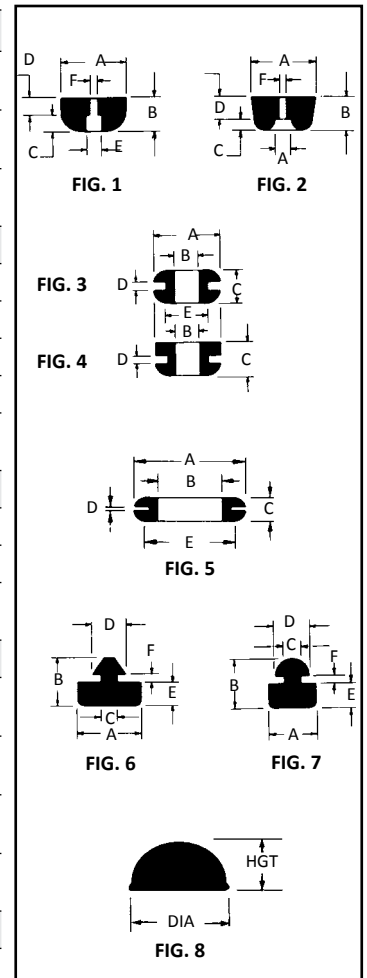



BALL BEARING SYSTEMS

BALL BEARING SYSTEMS - A COMPREHENSIVE GUIDE TO BEARING SELECTION SPECIFICALLY FOR FOOD SERVICE EQUIPMENT APPLICATIONS

COMPONENT HARDWARE HAS DESIGNED AN INNOVATIVE BALL BEARING SYSTEM WITH A DUAL FEATURE.

FIRST...A SYSTEM THAT SATISFIES THE OFTEN ENCOUNTERED PRICE AND DELIVERY PROBLEM WHEN PURCHASING EVEN STANDARD SIZE BEARINGS IN SMALL QUANTITIES. THIS SYSTEM PERMITS OFF THE SHELF DELIVERY AND SMART PRICES NO MATTER HOW SMALL THE ORDER QUANTITY.

SECOND...AND PERHAPS THE BEST...A BEARING SYSTEM THAT PERMITS THE USER TO CONFIGURE ESSENTIAL BEARING COMPONENTS TO ASSEMBLE A WIDE RANGE OF BEARING SIZES AND STYLES TO MEET INDIVIDUAL DESIGN REQUIREMENTS.

LISTED ON THIS PAGE IS A SELECTION OF BEARINGS, SCREW STUDS AND RIVETS WHICH ALLOWS YOU TO CHOOSE A BEARING ASSEMBLY TO SUIT YOUR SPECIFIC REQUIREMENTS.

INSTRUCTIONS: SELECT ANY BEARING WITH HOLE. IF SHOULDER IS REQUIRED CHOOSE SHOULDER SPACER(S) AS REQUIRED. SELECT THE RIVER OR SCREW STUD WITH LENGTH TO SATISFY SHOULDER, SHAFT CLEARANCE AND THICKNESS OF BEARINGS. (SEE ILLUSTRATION)

G

SCREW

OR

RIVET

+

SELECTED BEARING

B20-1013

+

SHOULDER SPACER (IF REQUIRED)

=

SHAFT CLEARANCE

1/32" (.7mm)

OVERALL

LENGTH

1/4-20

1/2" (13mm) DIA.

STAINLESS STEEL SCREW STUDS

MODEL NO.	TH'K
B30-X003	1" (25mm)
B30-X008	3/4" (19mm)

STAINLESS STEEL SHOULDER SPACERS

MODEL NO.	TH'K
B10-X004	7/32" (6mm)
B10-X008	3/32" (2mm)
B10-X009	1/32" (1mm)


STAINLESS STEEL RIVETS

MODEL NO.	TH'K
B10-X012	1/2" (13mm)
B10-X013	3/4" (19mm)




FLAT BEARINGS


B20 SERIES




B10 SERIES



B30 SERIES



B40 SERIES



FLAT BEARINGS WITH HOLE

MODEL NO.	INNER RACE	OUTER RACE	A	B	C	D	LOAD*
B20-1013	Steel	Steel	7/8" (22mm)	7/32" (6mm)	9/32" (7mm)	1/4" (6mm)	42 lbs (19kg)
B20-1019	Steel	Steel	1" (25mm)	5/16" (8mm)	3/8" (10mm)	1/4" (6mm)	57 lbs (25kg)
B20-1032	Steel	Steel	1" (25mm)	7/32" (6mm)	9/32" (7mm)	1/4" (6mm)	57 lbs (25kg)
B20-1028	Steel	Steel	1-5/16" (33mm)	5/16" (8mm)	3/8" (10mm)	1/4" (6mm)	87 lbs (39kg)
B20-1819	Steel	Nylon & Steel	1" (25mm)	7/32" (6mm)	9/32" (7mm)	1/4" (6mm)	53 lbs (24kg)
B20-1230	Stainless Steel	Stainless Steel	29/32" (23mm)	1/4" (6mm)	5/16" (8mm)	1/4" (6mm)	90 lbs (40kg)
B20-1219	Stainless Steel	Stainless Steel	1-5/16" (33mm)	5/16" (8mm)	3/8" (10mm)	1/4" (6mm)	87 lbs (39kg)

FLAT BEARINGS WITH RIVET

MODEL NO.	INNER RACE	OUTER RACE	A	B	C	D	LOAD*
B10-1013	Steel	Steel	7/8" (22mm)	7/32" (6mm)	3/8" (10mm)	1/8" (3mm)	42 lbs (19kg)
B10-1016	Steel	Steel	1" (25mm)	7/32" (6mm)	3/8" (10mm)	1/8" (3mm)	57 lbs (25kg)
B10-1025	Steel	Steel	1-5/16" (33mm)	5/16" (8mm)	3/8" (10mm)	3/32" (6mm)	87 lbs (39kg)
B10-1034	Steel	Steel	1-5/16" (33mm)	5/16" (8mm)	19/32" (15mm)	3/16" (5mm)	87 lbs (39kg)
B10-1822	Steel	Nylon & Steel	1" (25mm)	7/32" (6mm)	3/8" (10mm)	1/8" (3mm)	53 lbs (24kg)

FLAT BEARINGS WITH SCREW STUD

MODEL NO.	INNER RACE	OUTER RACE	A	B	C	D	LOAD*
B30-1013	Steel	Steel	7/8" (22mm)	7/32" (6mm)	3/8" (10mm)	3/8" (10mm)	42 lbs (19kg)
B30-1210	Stainless Steel	Stainless Steel	29/32" (23mm)	1/4" (6mm)	11/32" (9mm)	5/16" (8mm)	90 lbs (40kg)
B30-1034	Steel	Steel	1-5/16" (33mm)	5/16" (8mm)	19/32" (15mm)	3/8" (10mm)	87 lbs (39kg)


FLAT BEARINGS WITH TAPPED HOLE

MODEL NO.	INNER RACE	OUTER RACE	A	B	C	D	LOAD*
B40-1240	Stainless Steel	Stainless Steel	7/8" (22mm)	1/4" (6mm)	3/8" (10mm)	#10-32	80 lbs (35kg)

*BEARING LOAD RATINGS BASED ON 600 R.P.M.




CONCAVE & RUBBER TIRE BEARINGS




CONCAVE BEARING WITH HOLE
STEEL INNER AND OUTER RACE

MODEL NO.	A	B	C	D	LOAD*
B24-1013	1-3/16" (30mm)	5/16" (8mm)	3/8" (10mm)	1/4" (6mm)	80 lbs (36kg)




RUBBER TIRE BEARING WITH HOLE
STEEL INNER AND OUTER RACE

MODEL NO.	A	B	C	D	LOAD*
B23-1013	1-5/16" (33mm)	5/16" (8mm)	3/8" (10mm)	1/4" (6mm)	87 lbs (39kg)




CONCAVE BEARING WITH RIVET STUD
STEEL INNER AND OUTER RACE

MODEL NO.	A	B	C	D	LOAD*
B14-1010	1-3/16" (30mm)	5/16" (8mm)	3/8" (10mm)	1/8" (3mm)	80 lbs (36kg)

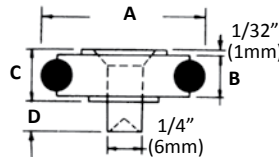


RUBBER TIRE BEARING WITH RIVET STUD
STEEL INNER AND OUTER RACE

MODEL NO.	A	B	C	D	LOAD*
B13-1010	1-5/16" (33mm)	5/16" (8mm)	3/8" (10mm)	1/8" (3mm)	87 lbs (39kg)



CONCAVE BEARING WITH SCREW STUD
STEEL INNER AND OUTER RACE


MODEL NO.	A	B	C	D	LOAD*
B34-1010	1-3/16" (30mm)	5/16" (8mm)	3/8" (10mm)	3/8" (10mm)	80 lbs (36kg)
B34-1016	1-3/16" (30mm)	5/16" (8mm)	19/32" (15mm)	1/8" (3mm)	80 lbs (36kg)

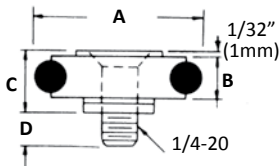

RUBBER TIRE BEARING WITH SCREW STUD
STEEL INNER AND OUTER RACE

MODEL NO.	A	B	C	D	LOAD*
B33-1010	1-5/16" (33mm)	5/16" (8mm)	3/8" (10mm)	3/8" (10mm)	87 lbs (39kg)
B33-1016	1-5/16" (33mm)	5/16" (8mm)	19/32" (15mm)	3/8" (10mm)	87 lbs (39kg)

G

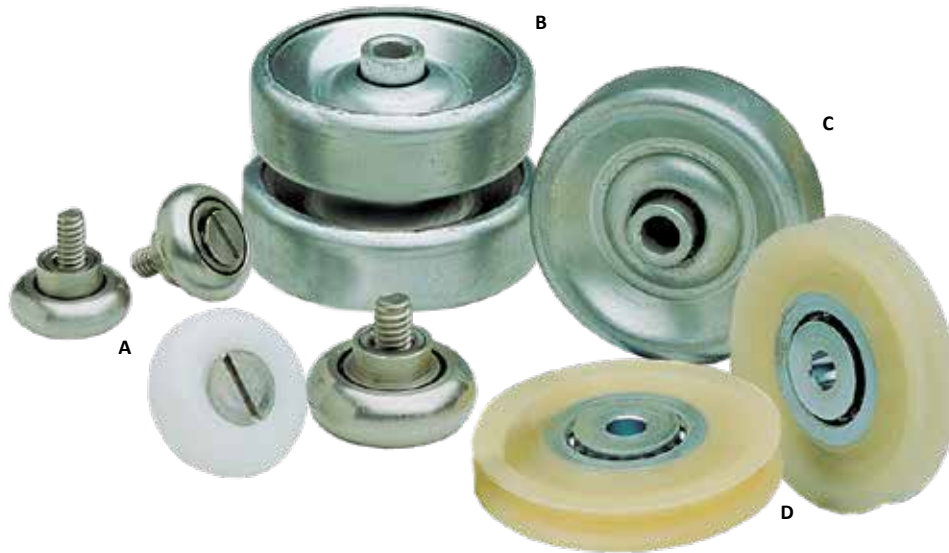


BALL BEARING ASSEMBLIES, PULLEY & WHEELS

REF A

DELIRIN BEARING AND STAINLESS STEEL BALL BEARING ASSEMBLY WITH REMOVABLE THREADED FASTENER


MODEL NO.	MAT'L.	TYPE	A	B	C	D	E	F
S26-Y001	Stainless Steel	Ball Bearing	.760 (19mm)	.250 (6mm)	.187 (5mm)	.420 (11mm)	.300 (8mm)	10-24
S10-Y001	Zinc Plated Stainless	Ball Bearing	.760 (19mm)	.250 (6mm)	.187 (5mm)	.420 (11mm)	.300 (8mm)	10-24
S52-X101	Delrin	Solid	1.070 (27mm)	.375 (10mm)	.187 (5mm)	.500 (13mm)	.260 (7mm)	1/4-20
S52-X001	Stainless Steel	Ball Bearing	1.070 (27mm)	.375 (10mm)	.187 (5mm)	.500 (13mm)	.260 (7mm)	1/4-20

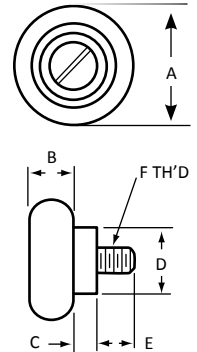

REF B


STAINLESS STEEL and STEEL WHEELS

- IDEAL FOR DRAWER SLIDES AND CONVEYOR ASSEMBLIES
- HEAT TREATED INNER AND OUTER RACEWAYS
- ALL METAL CONSTRUCTION



STAINLESS STEEL WHEEL
MODEL NO. IR-0031

STEEL WHEEL ZINC PLATED
MODEL NO. IR-2263





REF C

STAINLESS STEEL WHEEL

MODEL NO. IR-1061


ZINC PLATED STEEL with OFFSET BUSHING
MODEL NO. IR-2112



REF D

NYLON WHEEL PULLEY with STEEL RACES


NYLON/STEEL WHEEL PULLEY
MODEL NO. B25-1810





SLIDING DOOR COMPONENTS
OVERHEAD TRACK COMPONENTS FOR SLIDING DOORS

REF A



SLIDING DOOR TRACK
EXTRUDED ALUMINUM
16 GAUGE

MODEL NO.	LENGTH
B57-0048	48" (1219mm)
B57-0060	60" (1524mm)
B57-0072	72" (1828mm)
B57-0120	120" (3048mm)
B57-0144	144" (3657mm)

REF B

FRONT DOOR SHEAVE, ZINC PLATED STEEL
3/4" (19mm) SIDE MOUNTED DOOR HANGER



MODEL NO.	WHEEL TYPE
B58-5511	Flat, Steel Plated, Ball Bearing
B58-5513	Flat, Nylon Surface, Steel Inner Races, Ball Bearing

REF C

REAR DOOR SHEAVE, ZINC PLATED STEEL
3/4" (19mm) SIDE MOUNTED DOOR HANGER

MODEL NO.	WHEEL TYPE
B58-5521	Flat, Steel Plated, Ball Bearing
B58-5523	Flat, Nylon Surface, Steel Inner Races, Ball Bearing


REF D

MATERIAL:
STEEL, ZINC PLATED

BUMPER:
SOLID RUBBER

DOOR STOP

MODEL NO.
B60-1086




REF E

GUIDE PINS

MODEL NO. B56-1096

SPRING LOADED with PUSH-ON SPEED NUTS

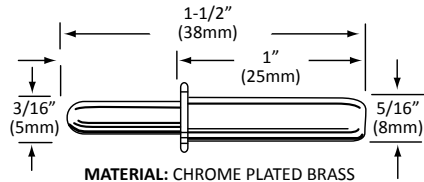


REF F


DOOR GUIDE

MODEL NO.
B62-1093

FOR 3/4" (19mm)
SLIDING DOORS

MATERIAL: NYLON
O.A. SIZE: 1-3/4" X 2-1/8"
(44mm x 54mm)

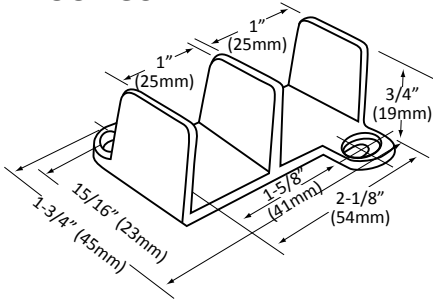


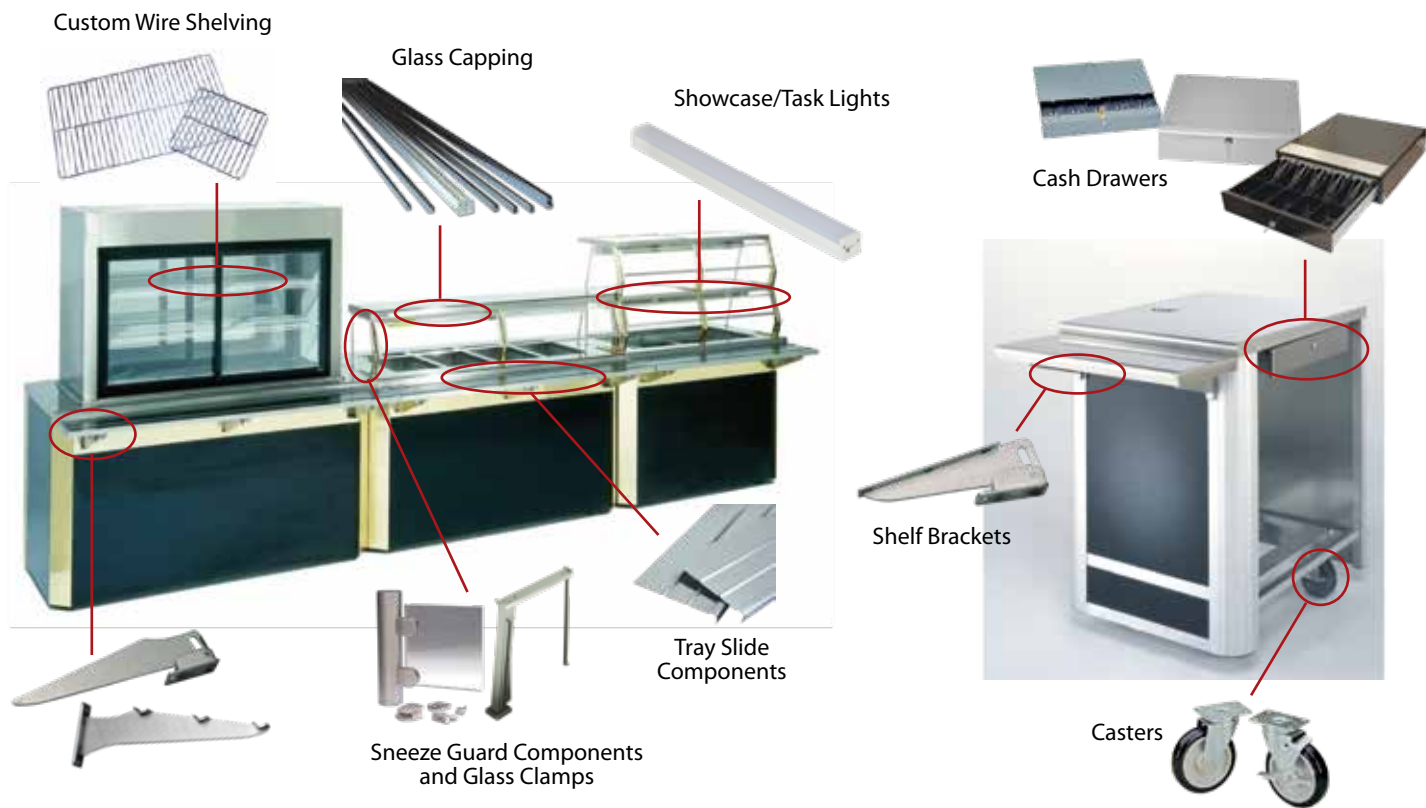

TRAY SLIDE COMPONENTS	H194	DRIP PLATE	H204
TRAY SLIDE & SHELF BRACKETS	H195	END CAPS & LID COVER BRACKETS	H205
FOLD DOWN/REMOVABLE SHELF BRACKETS	H196	SINK/TABLE/BAR ACCESSORIES	H206
PROTECTOR & SNEEZE GUARD COMPONENTS	H197	CORNER INSERTS	H207
GLASS CLAMPS, GLASS CAPPING & CHANNEL	H198	BRITE GARD™ CLEANING PRODUCTS	H208
CAP STRIPS & DIVIDER BARS	H199	ROLLER ASSEMBLIES. CONVEYOR ROLLER COMPONENTS & WHEELS	H209
MOULDINGS & DIVIDERS	H200	CONVEYOR ROLLER ASSEMBLIES	H210
POT RACK COMPONENTS	H201	ORDER FORM-CUSTOM CONVEYOR ROLLERS	H211
TUBING ACCESSORIES	H202		
WALL SHELVING	H203		

For Lighting Components, please see Lighting & Electrical on pages D95- D111


Tray Slide Components

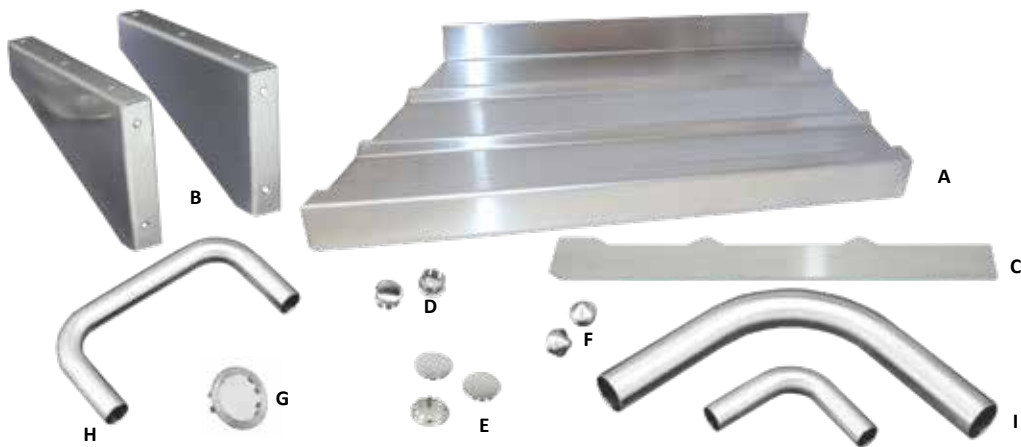


TRAY SLIDE COMPONENTS

REF. A
STAINLESS STEEL • ROLL FORMED
CONTINUOUS TRAY SLIDE
• PROVIDED WITH 90° ANGLE FOR EASY INSTALLATION
• CONTINUOUS...PERFECT ALIGNMENT • SATIN POLISHED FINISH


MODEL NO.	GAUGE	LENGTH
J12-1601	16 ga (1.6mm)	10 ft (3000mm)

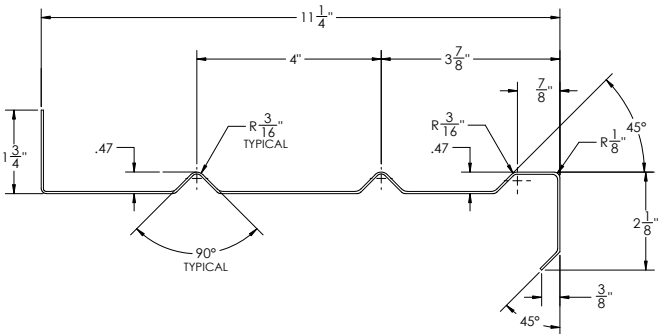


REF. B
HEAVY 14 GAUGE
STAINLESS STEEL BRACKET
MODEL NO. J19-1400
• ECONOMICAL
• POLISHED TO A #4 SATIN FINISH
• PROVIDED WITH 91° ANGLE TO PREVENT TRAY SLIDE SAG
• PRE-DRILLED MOUNTING HOLES FOR FAST CONVENIENT INSTALLATION
• IDEAL FOR USE WITH CONTINUOUS TRAY SLIDE
• SOLD BY PAIR ONLY

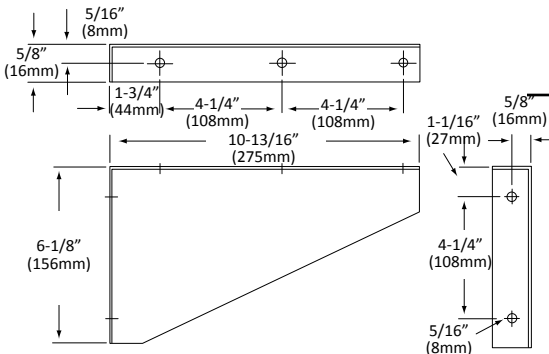

REF. C
STAINLESS STEEL
END PLATE
MODEL NO. J12-1402
14 ga (1.9mm) POLISHED
STAINLESS STEEL FINISH

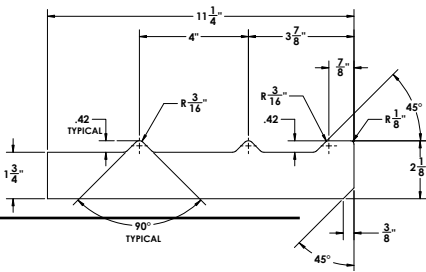

REF. E
NICKEL PLATED STEEL
END CAP
FOR 1-5/8" (41mm) O.D. TUBING
MODEL NO. J16-0158




REF. F
SOLID STAINLESS STEEL
END CAP
FOR 1" (25mm) O.D.
18 ga (1.2mm) TUBING
(WELD APPLICATION)
MODEL NO. J16-0100




REF. D
NICKEL PLATED STEEL
END CAP
FOR 1" (25mm)
O.D. TUBING
MODEL NO. J16-0201



REF. G
STAINLESS STEEL
SCREENED HOLE PLUG
FOR 1-5/8" (41mm) O.D. HOLE
MODEL NO. J16-0158-SPSS




REF. H
16 GAUGE (1.5 mm)
STAINLESS STEEL
"U" BENDS
FOR 1" (25mm) O.D. TUBING
DESIGNED FOR TRAY SLIDE RAILS
MODEL NO. J13-4488*
*CAN BE USED WITH NO.'S
J19-4960 & J19-4955
3 RAIL TRAY SLIDE BRACKETS



REF. I
STAINLESS STEEL
90° ELBOWS
• 16 ga (1.5mm) • FOR 1" (25mm) & 1-5/8" (41mm)
TUBING DESIGNED FOR RAILS, SUPPORTS, ETC.

MODEL NO.	O.D.	A	B	C
J14-0117	1" (25mm)	4" (102mm)	4" (102mm)	1-1/2" (38mm)
J14-0119	1-5/8" (41mm)	10" (254mm)	10" (254mm)	4-5/8" (117mm)



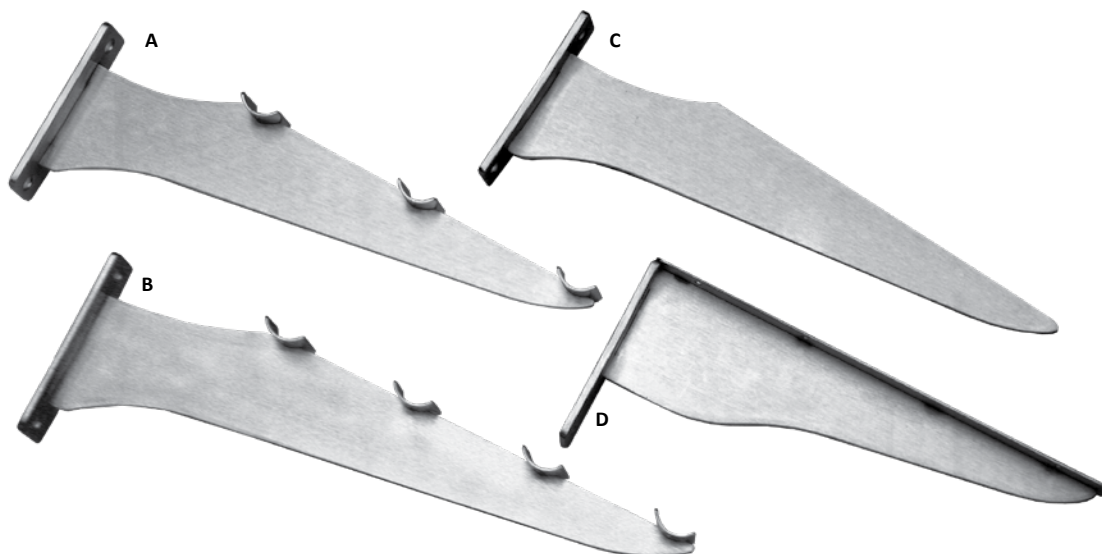


TRAY SLIDE and SHELF BRACKETS

REF. A

STAINLESS STEEL 3-RAIL TRAY SLIDE BRACKET



- LOAD CAPACITY: 200 lbs PER 2 BRACKETS
- FOR SUPPORT OF 1" (25mm) O.D. RAILS

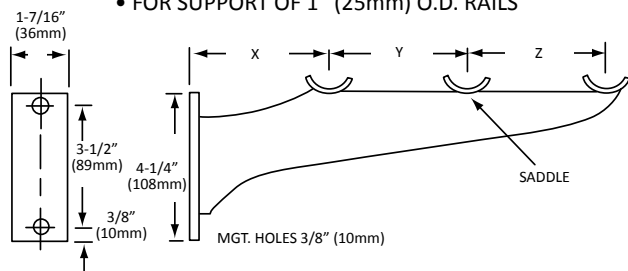

MODEL NO.	"X"	"Y"	"Z"
J19-4960	4" (102mm)	4" (102mm)	4" (102mm)
J19-4962	4" (102mm)	4-1/2" (114mm)	4-1/2" (114mm)


REF. C

STAINLESS STEEL TRAY SLIDE BRACKET WITHOUT SADDLES



MODEL NO. J19-4960-LT

LOAD CAPACITY: 150 lbs PER 2 BRACKETS

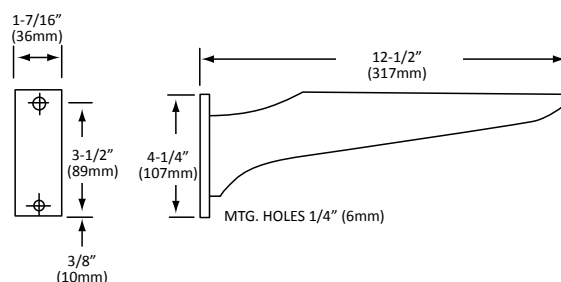


REF. B

STAINLESS STEEL 4-RAIL TRAY SLIDE BRACKET

MODEL NO. J19-4964

- LOAD CAPACITY: 200 lbs PER 2 BRACKETS
- FOR SUPPORT OF 1" O.D. RAILS

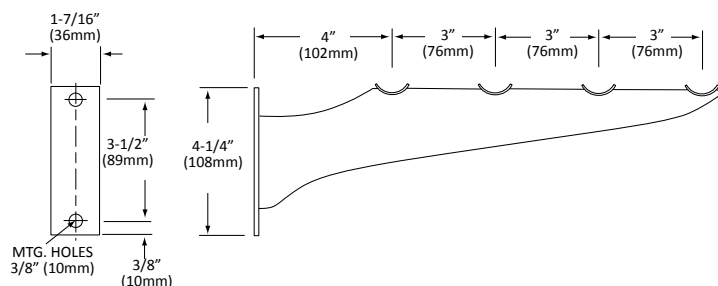


REF. D

STAINLESS STEEL FIXED SHELF BRACKET


MODEL NO. J19-4966

LOAD CAPACITY: 200 lbs PER 2 BRACKETS

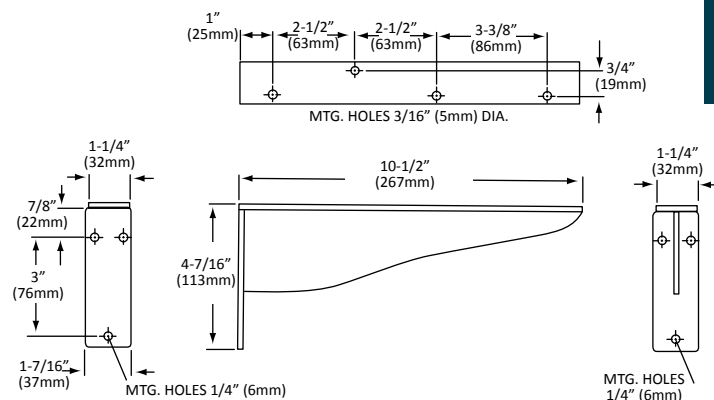

ALL BRACKETS SHOWN ARE 8 GAUGE (.170" - 4.5mm), STAINLESS STEEL POLISHED TO A #4 SATIN FINISH

Fold Down / Removable Shelf Brackets

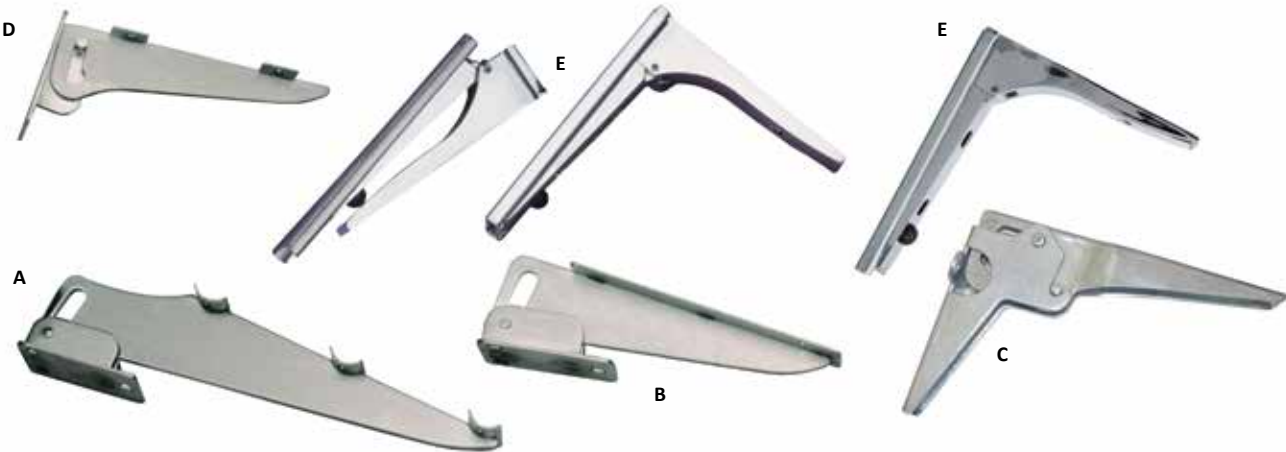


FOLD DOWN / REMOVABLE SHELF BRACKETS

REF. A STAINLESS STEEL FOLD DOWN 3-RAIL TRAY SLIDE BRACKET
MODEL NO. J19-4955


LOAD CAPACITY: 150 lbs PER 2 BRACKETS

FOR SUPPORT OF 1" (25mm) O.D. RAILS
ALSO AVAILABLE WITHOUT SADDLES... ORDER AS J19-4955-LT

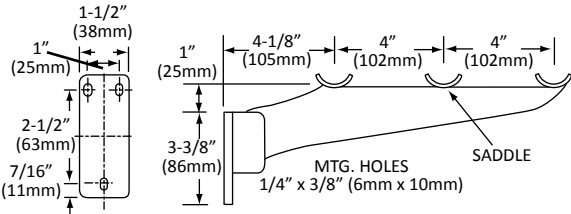


REF. B STAINLESS STEEL FOLD DOWN SHELF BRACKET
MODEL NO. J19-4967

LOAD CAPACITY: 200 lbs PER 2 BRACKETS

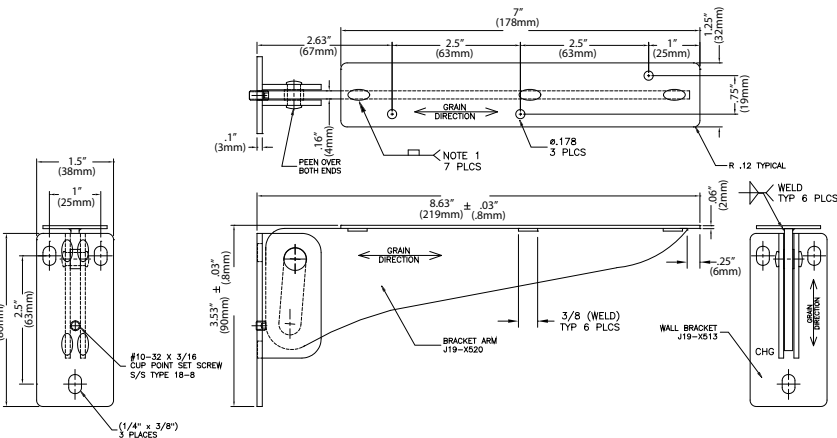

REF. C HEAVY DUTY ZINC PLATED STEEL
FOLD DOWN SHELF BRACKET
MODEL NO. J18-2000

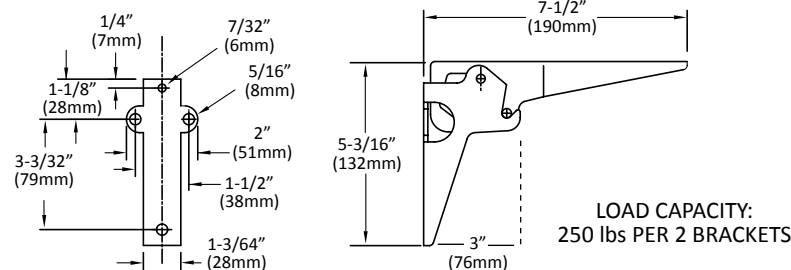


REF. D STAINLESS STEEL FOLD DOWN
REMOVABLE SHELF BRACKET




• SATIN FINISH • HEAVY DUTY
MODEL NO. J19-5000*

*SOLD AS A PAIR, KEYHOLE BASE WITH BRACKET
AND STRAIGHT PIN BASE WITH BRACKET
MATERIAL: STAINLESS STEEL WITH A #4 FINISH
LOAD CAPACITY: 150 lbs PER 2 BRACKETS

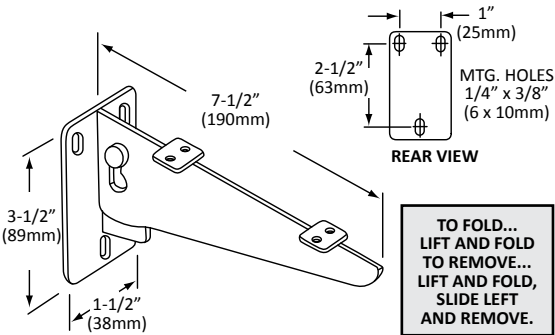

REF. E HEAVY DUTY FOLDING
REMOVABLE SHELF BRACKET

• FOLDS DOWN WHEN NOT IN USE
• SHELVES EASILY REMOVED FOR CLEANING

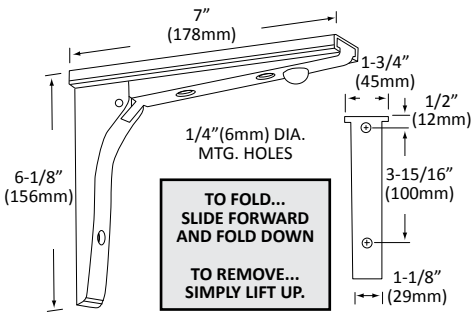

MODEL NO.	DESCRIPTION
J17-4270	Chrome Plated Die Cast Bracket With 14 ga (2mm) Zinc Plate Steel Mount
J17-4273	Chrome Plated Die Cast Bracket With 300 Series Stainless Steel Mount

LOAD CAPACITY: 200 lbs PER 2 BRACKETS



PROTECTOR AND SNEEZE GUARD COMPONENTS

STAINLESS STEEL PROTECTOR ASSEMBLY

- STAINLESS STEEL CONSTRUCTION
- FOLD DOWN BRACKET DESIGN
 - RIGID SUPPORT POST
 - STURDY BASES

SPECIFICATIONS:

STOCK SIZE: 14" (357mm) HIGH, 10" (254mm) SHELF, 10° SLANT FRONT


POSTS: SEAMLESS STAINLESS STEEL

BRACKETS: STAINLESS STEEL
DIE FORMED FURNISHED WITH LOCKING FEATURE TO HOLD BRACKET ASSEMBLY IN CLOSED POSITION ... NYLON ROLLER AND END CHANNEL TO ACCEPT WRAPPED GLASS FOR NOMINAL 1/4" (6mm) GLASS

MOUNTING: 5/16" x 2-1/4" (8mm x 57mm) BOLT FURNISHED FOR FASTENING FROM UNDERSIDE


STAINLESS STEEL PROTECTOR ASSEMBLY WITH FOLD DOWN BRACKETS

REF. A

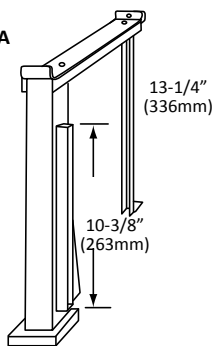


MODEL NO. J25-2100
(LEFT HAND)

REF. B

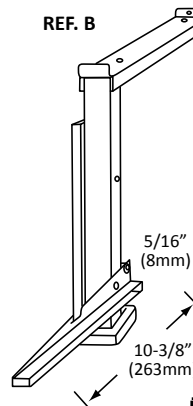


MODEL NO. J25-2300
(CENTER)

REF. C



MODEL NO. J25-2200
(RIGHT HAND)

REF. E



10-3/8" L STAINLESS STEEL FOLD DOWN SNEEZE GUARD PROTECTOR BRACKET - PAIR

MODEL NO. J29-4482

- ALL STAINLESS STEEL CONSTRUCTION
- FOLD DOWN BRACKETS FACILITATE EASY CLEANING OF GLASS
- BRACKETS HAVE LOCKING FEATURE TO SECURELY FASTEN GLASS IN THE UPRIGHT POSITION
- GLASS CHANNEL ON BRACKET ACCEPTS NOMINAL 1/4" GLASS WITH STAINLESS WRAP
- FURNISHED WITH SCREWS AND WASHERS
- SOLD PER PAIR - LEFT AND RIGHT HAND
- ACCEPTS NOMINAL 1/4" GLASS WITH STAINLESS TRIM
- FACILITATES EASY CLEANING OF GLASS
- FURNISHED WITH SCREWS




REF. D

STAINLESS STEEL ADJUSTABLE SNEEZE GUARD BRACKET - PAIR


MODEL NO. J30-4465

- ADJUSTABLE PIE SHAPED BRACKETS PERMIT PROTECTOR GLASS TO BE PIVOTED ON UPRIGHT POSTS FOR OPTIMAL VIEWING AND PROTECTION
- ALL STAINLESS STEEL CONSTRUCTION
- SUPPLIED WITH TWO THUMBSCREWS FOR LOCKING IN THE ANGLE ADJUSTMENT ON THE POST
- 5" L GLASS CHANNEL ACCEPTS NOMINAL 1/4" WRAPPED PLATE GLASS
- FURNISHED WITH THUMB SCREWS AND WASHERS
- SOLD PER PAIR - LEFT HAND AND RIGHT HAND BRACKET (1) RIGHT HAND & (1) LEFT HAND WITH (2) THUMBSCREWS FOR ADJUSTMENT

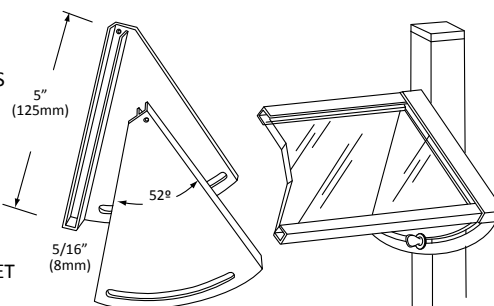

SPECIFICATIONS: SHOE PROVIDED TO ACCEPT WRAPPED 1/4" (6mm) PLATE GLASS

Glass Clamps, Glass Capping And Channel

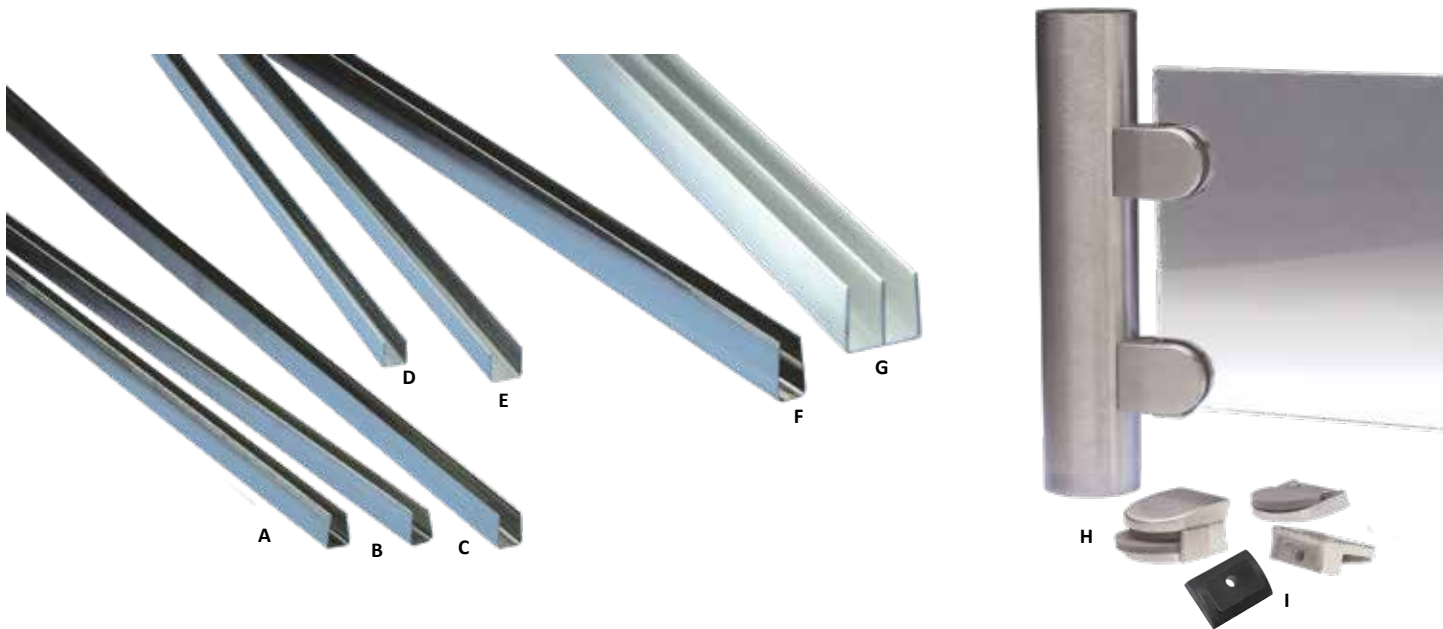

GLASS CLAMPS, GLASS CAPPING AND CHANNEL


STAINLESS STEEL GLASS CAPPING

- PREVENTS CHIPPING • PROVIDES SECURE FIT
- ATTRACTIVE POLISHED FINISH


REF.	MODEL NO.	STAINLESS STEEL TYPE	GAUGE
A	B70-1001	300 Series	.022 (.6mm)
B	B70-1002	300 Series	.022 (.6mm)
C	B70-1003	300 Series	.022 (.6mm)
D	B70-1005	400 Series	.019 (.5mm)
E	B70-1007	400 Series	.019 (.5mm)
F	B70-1008	400 Series	.019 (.5mm)
A	*B70-1001-6	300 Series	.022 (.6mm)

*6 ft (1.9m) LENGTH.
STOCK LENGTH 12 ft (3.6m) MINIMUM ORDER 144 ft (43.9m)


REF. A




REF. B




REF. C




REF. D



REF. E




REF. F



REF. G

EXTRUDED ALUMINUM
DOUBLE CHANNEL
TRACK COMPONENT
MODEL NO. B74-0011
STOCK LENGTH 12 ft (3.6m)



REF. H

STAINLESS STEEL GLASS CLAMP FOR ROUND TUBING

MODEL NO.
B79-1000
1/4" GLASS
CLAMP, TOP

MODEL NO.
B79-2000-L
1/4" GLASS CLAMP,
BOTTOM LEFT

MODEL NO.
B79-2000-R
1/4" GLASS CLAMP,
BOTTOM RIGHT

MODEL NO.
B79-1038
3/8" GLASS
CLAMP, TOP

MODEL NO.
B79-2038-L
3/8" GLASS CLAMP,
BOTTOM LEFT

MODEL NO.
B79-2038-R
3/8" GLASS CLAMP,
BOTTOM RIGHT


NOTE: MOUNTING SCREW NOT PROVIDED

- FIRMLY HOLDS GLASS WITHOUT DRILLING
- UNIQUE LEDGE ON BOTTOM BRACKETS PROVIDES A POSITIVE STOP TO MAKE INSTALLATION EASIER
- LIGHT GRAY SILICONE PAD CUSHIONS GLASS, WHILE PROVIDING MAXIMUM GRIPPING POWER
- SLEEK DESIGN MAXIMIZES VIEWABLE SURFACE AREA OF GLASS
- 3/8" OFFSET
- FOR USE WITH 1-5/8" TUBING
- IDEAL FOR PARTITIONS, DISPLAYS AND SNEEZE GUARDS
- SATIN FINISH MATCHES COUNTERTOPS AND SUPPORTS

REF. I

BLACK DELRIN
ADAPTER FOR
SQUARE TUBING
APPLICATION
1/4" GLASS ONLY

MODEL NO.
B79-X014

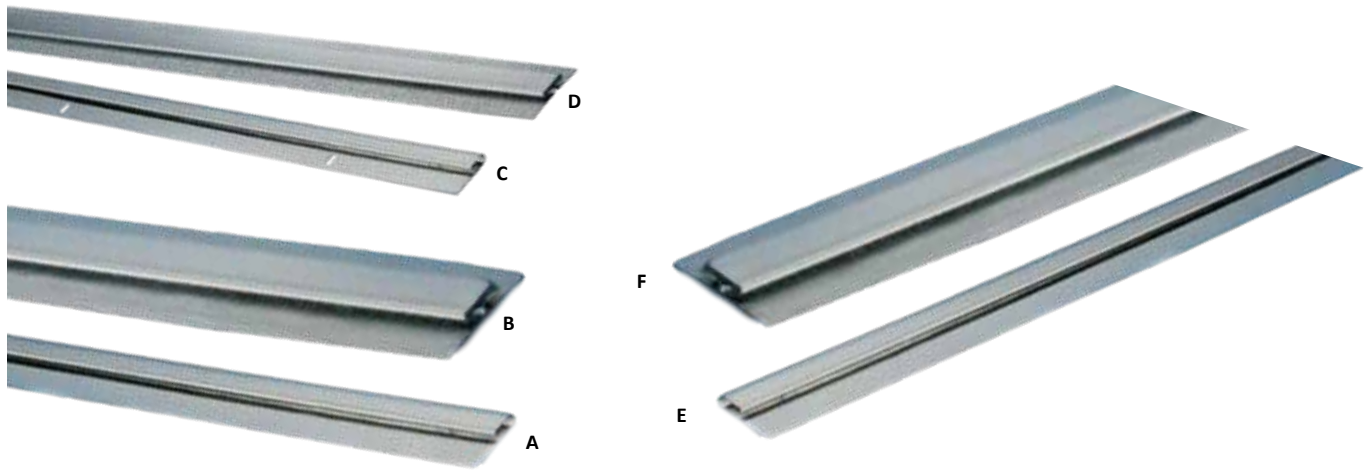

CAP STRIP AND DIVIDER BAR

- NEW EXTRA WIDE PROFILE FOR EASIER INSTALLATION • ALL STAINLESS STEEL CONSTRUCTION • ACCEPTS 1/16" (2mm) WALL FLASHING MATERIAL • GRAIN OF FINISH MATCHES WALL LINING • AVAILABLE IN VARIOUS LENGTHS TO MINIMIZE SCRAP • INDIVIDUALLY PLASTIC SLEEVED FOR PROTECTION OF FINISH • CAP STRIP HAS HEMMED EDGE FOR SAFETY

REF. A

EXTENDED WIDE STAINLESS STEEL CAP STRIP


FOR 1/16" (1.6mm) MATERIAL
SATIN FINISH

MODEL NO. J63-1651-78


6-1/2 ft (2m) LENGTH

MODEL NO. J63-1651-120

10 ft (3m) LENGTH



NEW
Innovative
Design



REF. B

EXTENDED WIDE STAINLESS STEEL DIVIDER BAR WITH S/S BACK PLATE

FOR 1/16" (1.6mm) MATERIAL
SATIN FINISH

MODEL NO. J64-1651-78

6-1/2 ft (2m) LENGTH

MODEL NO. J64-1651-120

10 ft (3m) LENGTH

- ALL STAINLESS STEEL CONSTRUCTION • ACCEPTS 1/16" (2mm) WALL FLASHING MATERIAL • GRAIN OF FINISH MATCHES WALL LINING
- AVAILABLE IN VARIOUS LENGTHS TO MINIMIZE SCRAP • INDIVIDUALLY PLASTIC SLEEVED FOR PROTECTION OF FINISH

REF. C

STAINLESS STEEL CAP STRIP

FOR 1/16" (1.6mm) MATERIAL
#4 SATIN FINISH

MODEL NO. J63-1451

7 ft (2.1m) LENGTH

MODEL NO. J63-1451-8*

8 ft (2.4m) LENGTH



MODEL NO. J63-1451-9*

9 ft (2.7m) LENGTH

MODEL NO. J63-1451-10*

10 ft (3m) LENGTH

* AVAILABLE ON APPLICATION AND
12 PIECE MINIMUM FOR 8, 9 & 10 ft LENGTHS



REF. D

STAINLESS STEEL DIVIDER BAR WITH GALVANIZED BACK PLATE

FOR 1/16" (1.6mm) MATERIAL
BRIGHT FINISH

MODEL NO. J64-1450

7 ft (2.1m) LENGTH

MODEL NO. J64-1450-8*

8 ft (2.4m) LENGTH

MODEL NO. J64-1450-9*

9 ft (2.7m) LENGTH

MODEL NO. J64-1450-10*

10 ft (3m) LENGTH

* AVAILABLE ON APPLICATION AND
12 PIECE MINIMUM FOR 8, 9 & 10 ft LENGTHS

REF. E

EXTENDED WIDE 304 STAINLESS STEEL CAP STRIP



FOR 1/16" (1.6mm) MATERIAL
SATIN FINISH

MODEL NO. J63-2651-84

7 ft (2.1m) LENGTH

MODEL NO. J63-2651-120

10 ft (3m) LENGTH



REF. F

EXTENDED WIDE 304 STAINLESS STEEL DIVIDER BAR WITH S/S BACK PLATE

FOR 1/16" (1.6mm) MATERIAL
SATIN FINISH

MODEL NO. J64-2651-84

7 ft (2.1m) LENGTH

MODEL NO. J64-2651-120

10 ft (3m) LENGTH



MOULDINGS AND DIVIDERS

REF. E

- GALVANIZED STEEL BACK PLATE
- STAINLESS STEEL SNAP-ON COVER
- BRIGHT FINISH

STAINLESS STEEL
FLAT SNAP-ON MOULDING

MODEL NO.	WIDTH
J60-2240	3/4" (19mm)
J60-2260	1" (25mm)
J60-2270	1-1/4" (32mm)

12 ft (3.6m) LENGTHS


REF. F

STAINLESS STEEL
LINE UP
DIVIDER

MODEL NO. J65-4110


1/2" (13mm) FACE
12 ft (3.6m) LENGTH

STOCK LENGTH 12 ft (3.6m)



H

REF. G



STAINLESS STEEL
SPLIT TUBE MOULDING

- 20 ga (1mm) • 2B FINISH

MODEL NO. J62-0012

12 ft (3.6m) LENGTH, IDEAL FOR HEMMING/EDGING
MINIMUM ORDER 12 PIECES




POT RACK COMPONENTS



REF. A

**STAINLESS STEEL
SLIDING
POT RACK HOOK
SINGLE PRONG**




MODEL NO. J79-4115



REF. B

**STAINLESS STEEL AND
ZINC PLATED STEEL
SLIDING POT RACK HOOKS
DOUBLE PRONG**

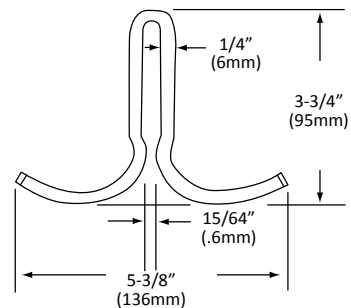


**STAINLESS STEEL MODEL NO. J77-4401
ZINC PLATED STEEL MODEL NO. J77-4420**



REF. C

**STAINLESS STEEL
SUPPORT
COLLAR**

FOR 1-5/8" (41mm) O.D. TUBING

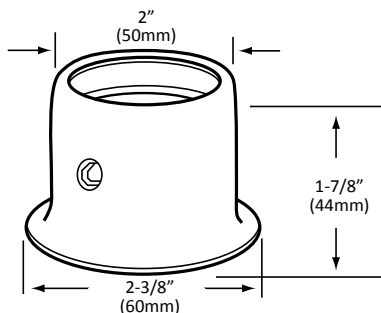


MODEL NO. A16-0206-C



REF. D


**STAINLESS STEEL
TUBULAR
COLLAR**

FOR 1-5/8" (41mm) O.D. TUBING

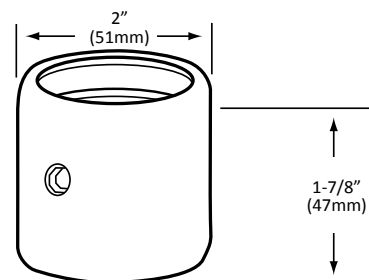

MODEL NO. A24-0206-C

H

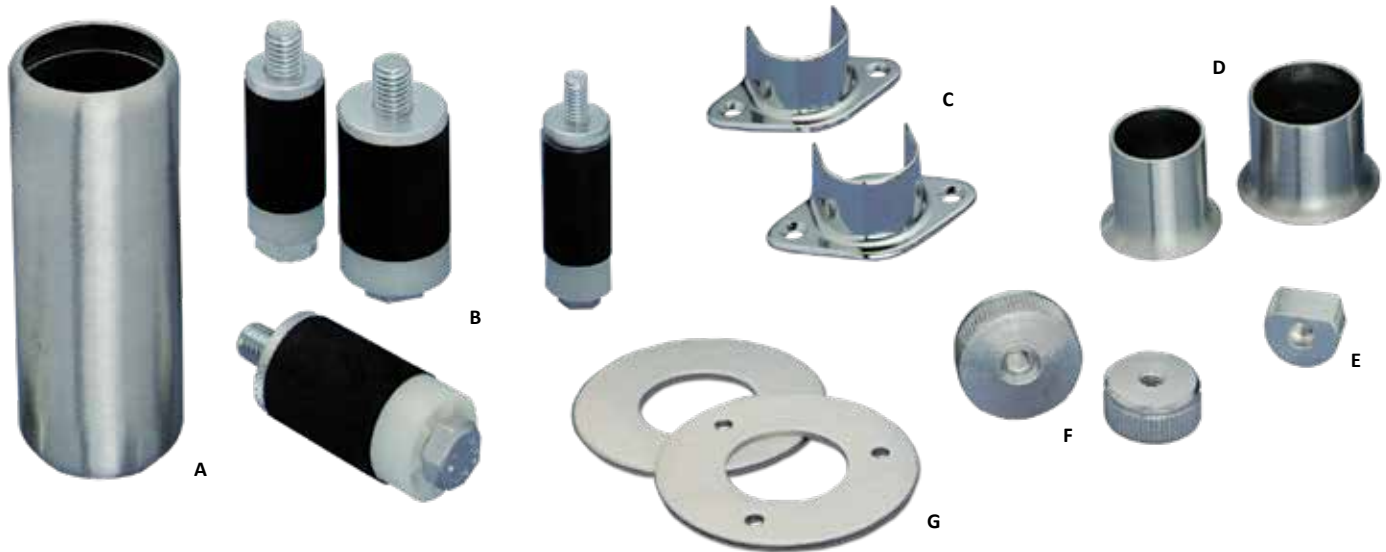

TUBING ACCESSORIES


REF. A

STAINLESS STEEL TUBULAR SHELF SUPPORT

FOR 1-5/8" (41mm) O.D. TUBING

- LONG LENGTH • ADJUSTABLE
- DOUBLE SET SCREW LOCKING
- PLATED INSIDE LINER
- SUITABLE FOR A WIDE ARRAY OF CUSTOM APPLICATIONS

MODEL NO. A24-0207-C
5-1/4" (133mm) LG.




REF. B

RUBBER EXPANDING FASTENERS

- FOR FAST KD INSTALLATION
- FOR ROUND OR SQUARE TUBING

MODEL NO.	TUBING SIZE
J57-7100	1" (25mm)
J57-7125	1-1/4" (32mm)
J57-7150	1-1/2" (38mm)
J57-7158	1-5/8" (41mm)

NOTE: J57-7100 USES 5/16" BOLT.
ALL OTHERS USE 1/2" BOLTS.




REF. C

CHROME PLATED OBLONG BASE END FLANGE

FOR 1" (25mm) O.D. TUBING

- DIE CAST METAL • CHROME PLATED
- MODEL NO. J53-0125**




REF. D

STAINLESS STEEL ROUND BASE FLANGE

- STAINLESS STEEL

FOR 1" (25mm) O.D. TUBING... **MODEL NO. J52-0014**
FOR 1-1/4" (32mm) O.D. TUBING... **MODEL NO. J52-1250**



REF. E

PLATED STEEL KNURLED BUSHING

- PERMITS POSITIVE CONCEALED FASTENING

FOR 1" (25mm) O.D. TUBING
MODEL NO. J58-0100
16 GAUGE ONLY



FURNISHED WITH 1/4-20 TH'D

REF. F

PLATED STEEL KNURLED BUSHING

- PERMITS POSITIVE CONCEALED FASTENING

FOR 1-1/4" (32mm) O.D. TUBING... **MODEL NO. J58-0014***
FOR 1-5/8" (41mm) O.D. TUBING... **MODEL NO. J58-0158***
*16 GAUGE ONLY




FURNISHED WITH 5/16-18 TH'D

REF. G

STAINLESS STEEL ESCUTCHEON PLATE FLANGE

- 12 ga (2.6mm) STAINLESS STEEL W/ #4 SATIN FINISH
- FOR 1-5/8" (40mm) O.D. TUBING

WITH (3) 1/4" (6mm) DIA. HOLES **MODEL NO. J54-1583***
WITHOUT HOLES **MODEL NO. J54-1580**



Without Pot Rack



With Pot Rack and Hooks




STAINLESS STEEL WALL SHELVING

MODEL NO.	DESCRIPTION
WS1224SS	12" (30cm) D X 24" (61cm) W without Pot Rack
WS1236SS	12" (30cm) D X 36" (91cm) W without Pot Rack
WS1248SS	12" (30cm) D X 48" (123cm) W without Pot Rack
WS1260SS	12" (30cm) D X 60" (152cm) W without Pot Rack
WS1272SS	12" (30cm) D X 72" (183cm) W without Pot Rack
WS1224SS-PR	12" (30cm) D X 24" (61cm) W w/ Pot Rack and 2 hooks
WS1236SS-PR	12" (30cm) D X 36" (91cm) W w/ Pot Rack and 3 hooks
WS1248SS-PR	12" (30cm) D X 48" (123cm) W w/ Pot Rack and 4 hooks
WS1260SS-PR	12" (30cm) D X 60" (152cm) W w/ Pot Rack and 5 hooks
WS1272SS-PR	12" (30cm) D X 72" (183cm) W w/ Pot Rack and 6 hooks





OPTIONAL ACCESSORIES

MODEL NO.	DESCRIPTION
J79-4115	Single Pot Hook, Stainless Steel
J77-4401	Double Pot Hook, Stainless Steel

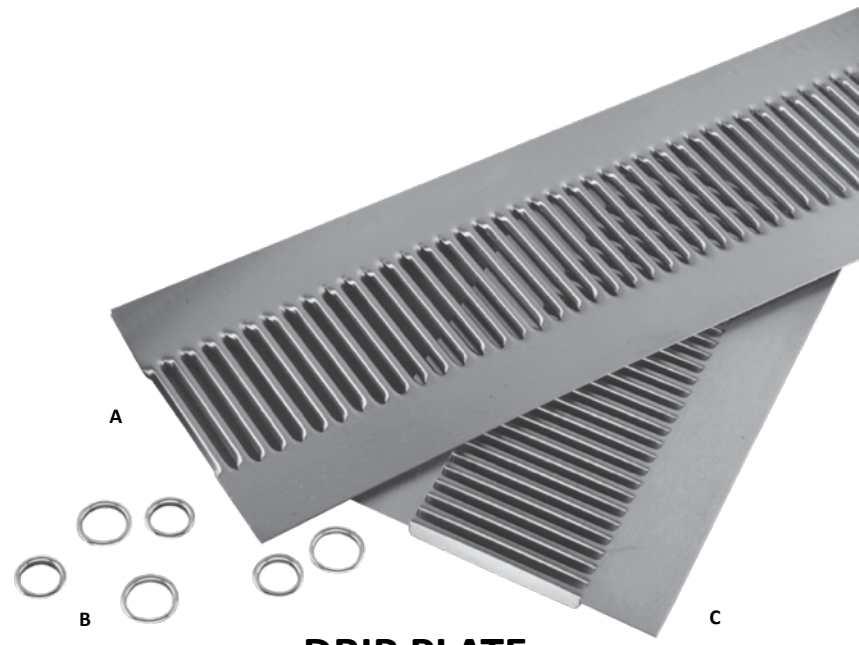

DRIP PLATE

REF. A

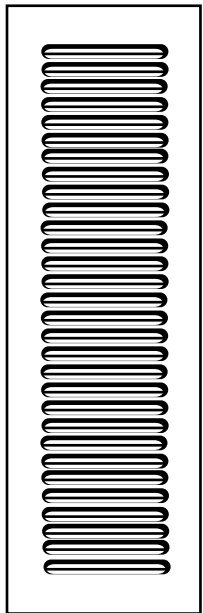

STAINLESS STEEL
DRIP PLATE
ECONOMY TYPE


- ECONOMY DESIGN
- 24 ga (.6mm) WITH #4 FINISH

ECONOMY TYPE
STAINLESS STEEL DRIP PLATE

MODEL NO	"A"	LENGTH
J81-5206-6-C	6" (152mm)	72" (1829mm)
J81-5207-6-C	7" (178mm)	72" (1829mm)
J81-5209-6-C	9" (229mm)	72" (1829mm)

PACKAGED 5 PCS. PER BOX


REF. B





NICKEL PLATED BRASS
FINISHING RINGS

MODEL NO.
J86-4300
FOR 7/8" (22mm) DIA. HOLE

MODEL NO.
J86-4301
FOR 1" (25mm) DIA. HOLE



REF. C

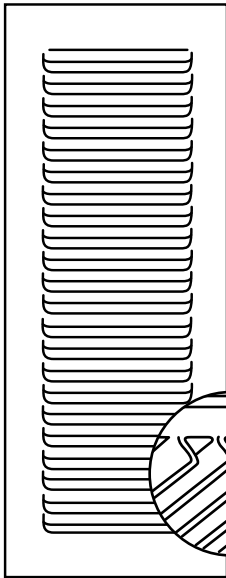

STAINLESS STEEL
DRIP PLATE
NON-SPLASH


- HEAVY DUTY DESIGN
- 21 ga (.8mm) WITH #4 FINISH

NON-SPLASH
STAINLESS STEEL DRIP PLATE

MODEL NO.	"A"	LENGTH
J80-5107-6-C	7" (178mm)	72" (1829mm)
J80-5109-6-C	9" (229mm)	72" (1829mm)

PACKAGED 5 PCS. PER BOX

H

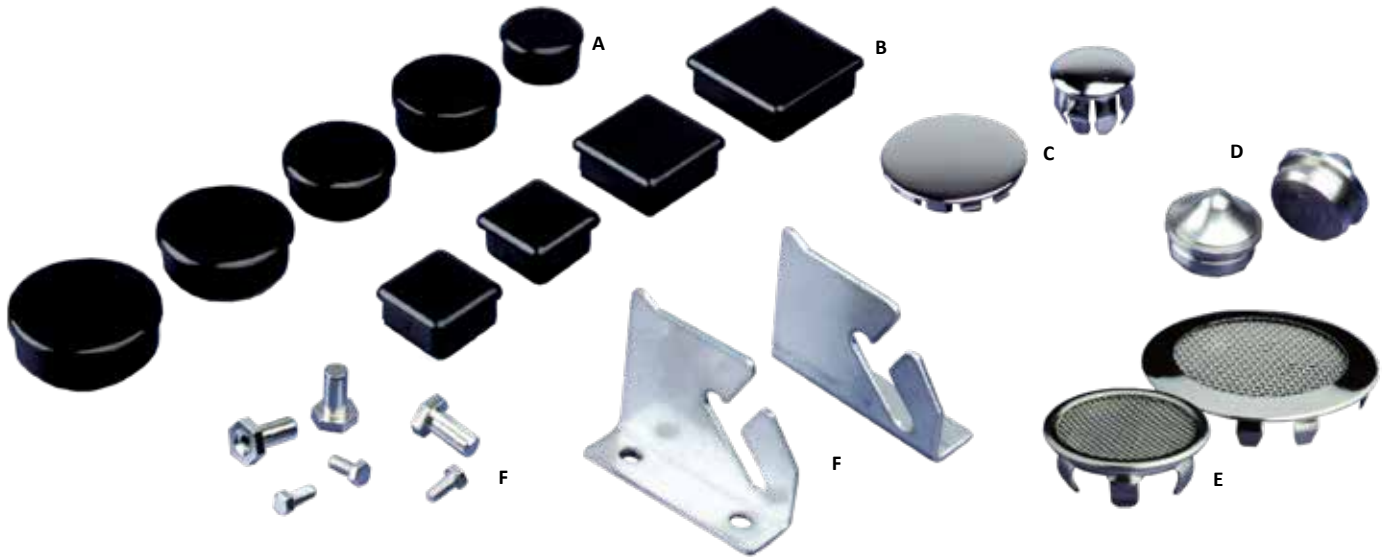

END CAPS AND LID COVER BRACKETS

REF. A

THERMOPLASTIC END CAPS FOR ROUND TUBING

MATERIAL: NYLON
FINISH: GLOSS BLACK

MODEL NO.	O.D.	GAUGE
J16-1000-RD	1" (25mm)	18 (1.2mm)
J16-1250-RD	1-1/4" (32mm)	18 (1.2mm)
J16-2125-RD	1-1/4" (32mm)	16 (1.5mm)
J16-1500-RD	1-1/2" (38mm)	16 (1.5mm)
J16-1625-RD	1-5/8" (41mm)	16 (1.5mm)

REF. B

THERMOPLASTIC END CAPS FOR SQUARE TUBING

MATERIAL: NYLON
FINISH: GLOSS BLACK

MODEL NO.	O.D.	GAUGE
J16-1000-SQ	1" x 1" (25 x 25mm)	18 (1.2mm)
J16-1001-SQ	1" x 1" (25 x 25mm)	16 (1.5mm)
J16-1250-SQ	1-1/4" x 1-1/4" (32 x 32mm)	18 (1.2mm)
J16-1500-SQ	1-1/2" x 1-1/2" (38 x 38mm)	16 (1.5mm)

NOTE: * INDICATES OUTSIDE DIMENSIONS

REF. C NICKEL PLATED STEEL END CAPS FOR ROUND TUBING

MODEL NO.
J16-0201

FOR 1" (25mm)
O.D. TUBING

MODEL NO.
J16-0158

FOR 1-5/8" (41mm)
O.D. TUBING

REF. D SOLID STAINLESS END CAPS MODEL NO. J16-0100

18 ga (1mm)
FOR 1" (25mm) O.D. TUBING
(WELD APPLICATION)

REF. E SOLID STAINLESS STEEL SCREENED HOLE PLUGS

MODEL NO. J16-0201-SPSS
FOR 1" (25mm) DIA. HOLE

MODEL NO. J16-0158-SPSS
FOR 1-5/8" (41mm) DIA. HOLE

REF. F



STAINLESS STEEL LID COVER BRACKET ASSEMBLY

- EASY INSTALLATION
- LIFT-OFF DESIGN

CAN BE FASTENED TO STAINLESS STEEL LIDS OR PLASTIC BUBBLE COVERS. DESIGNED FOR EASY LIFT-OFF AND FOR HOLD-OPEN POSITION FOR EASE OF SERVING.

MODEL NO. J33-1532

ASSEMBLY CONSISTS OF RIGHT & LEFT HAND BRACKETS COMPLETE WITH 4 PIVOT PINS WITH SCREW.

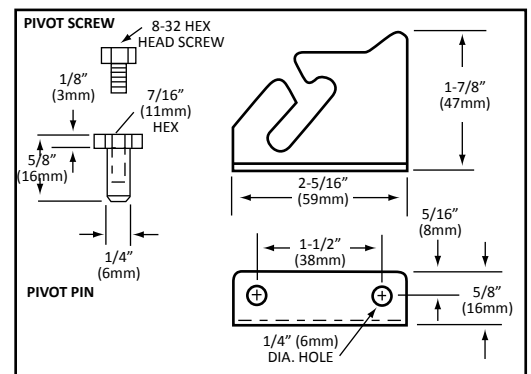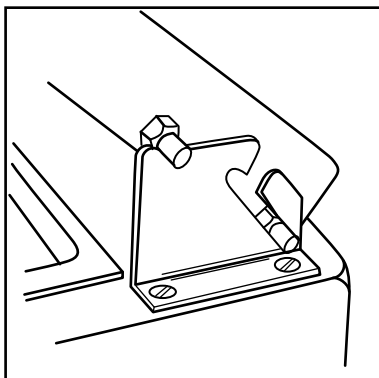

FOR STAINLESS STEEL PIVOT PINS ORDER **MODEL NO. J32-X001**
FOR STAINLESS STEEL PIVOT SCREWS ORDER **MODEL NO. J32-X002**



SINK / TABLE / BAR ACCESSORIES


REF. A



GREY SOLID RUBBER SCRAP BLOCK

FITS STANDARD 5-3/4" (146mm)
DIA. OPENING

MODEL NO. J92-9360




REF. B



GREY SOLID RUBBER SCRAP BLOCK FUNNEL SHAPED

FITS STANDARD 5-3/4" (146mm)
DIA. OPENING

MODEL NO. J92-5000




REF. C



STAINLESS STEEL SCRAP CHUTE

FITS STANDARD 6" (152mm)
DIA. OPENING

MODEL NO. J92-1000



PLATED CAST IRON BOTTLE OPENER MODEL NO. T80-0485



REF. D




STAINLESS STEEL DIPPERWELL ASSEMBLY

- FITS INTO 6" (152mm) DIA. OPENING
 - TYPE 18-8 STAINLESS STEEL
INNER AND OUTER SHELL
 - 9-1/2" (241mm) OVERALL LENGTH
- COMPLETE WITH STAINLESS STEEL DRAIN
AND 1-1/2" (38mm) O.D. X 4" (102mm)
LONG BRASS NICKEL PLATED TAILPIECE


MODEL NO. K30-1000
WITHOUT FAUCET

MODEL NO. K30-1010
WITH FAUCET

MODEL NO. K22-3100
FAUCET ONLY



ALSO AVAILABLE AS INDIVIDUAL COMPONENTS
1/2" NPS MALE INLET FURNISHED WITH 1/4" NPT
MALE UNION TAILPIECE AND MOUNTING HARDWARE

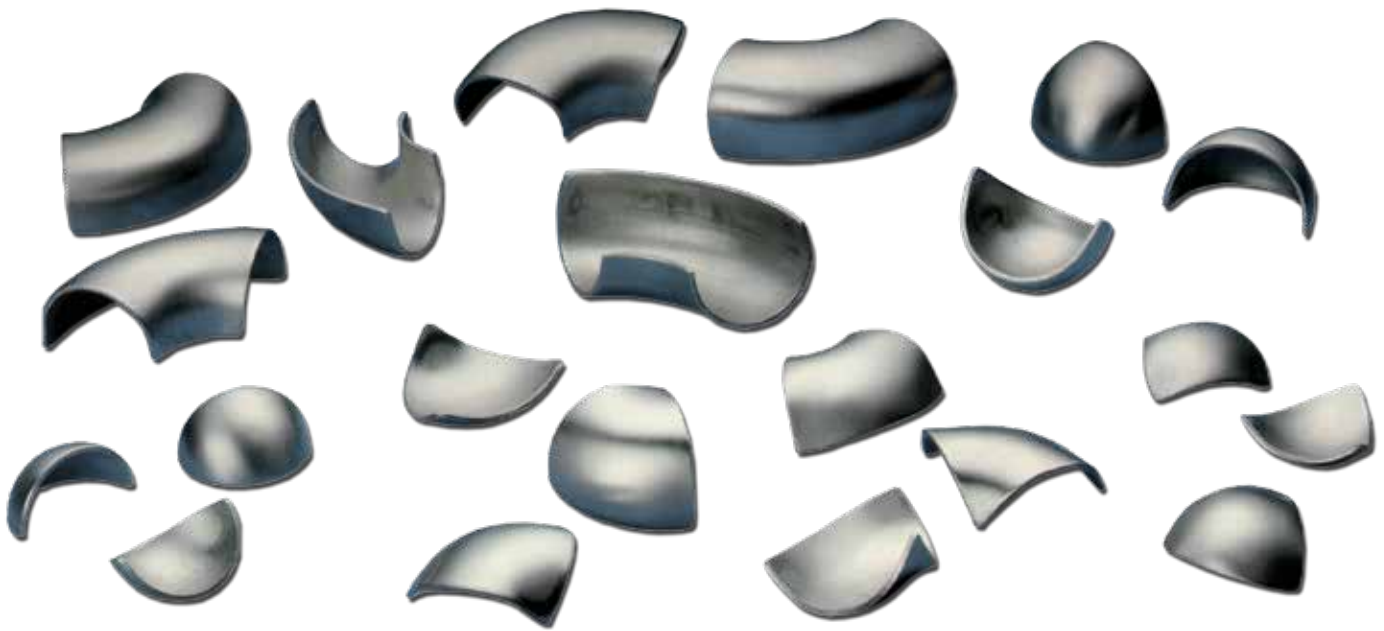

WELD-IN CORNER INSERTS



- IDEAL FOR STAINLESS STEEL SINKS, COUNTERS AND WORK TABLES

STAINLESS STEEL COVE CORNER INSERT

14 ga (1.8mm)

MODEL NO. J70-4701

FOR NOMINAL 1-1/2" (38mm) ROLLS
WITH 1" (25mm) INSIDE RADIUS





STAINLESS STEEL COVE CORNER INSERT

14 ga (1.8mm)

MODEL NO. J70-4691

FOR NOMINAL 1-1/2" (38mm) ROLLS
WITH 1" (25mm) INSIDE RADIUS



STAINLESS STEEL BULL NOSE INSERT




14 ga (1.8mm)

MODEL NO. J72-4711

1.5" (38mm) ROLL, 3/4" SPHERICAL RADIUS, .073 GAUGE

MODEL NO. J72-4731

2" (51mm) ROLL, 1" SPHERICAL RADIUS, .073 GAUGE

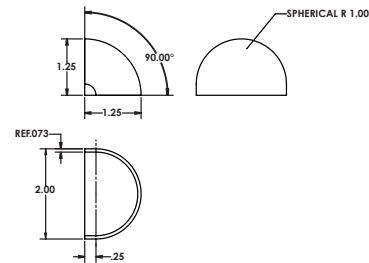




QUARTER SPHERES FOR NOMINAL
1-1/2" (38mm) AND 2" (51mm)

STAINLESS STEEL TRIANGULAR INSERT

14 ga (1.8mm)

MODEL NO. J70-4801

FULL SPHERICAL R 1.00



STAINLESS STEEL SQUARE CORNER INSERT

14 ga (1.8mm)

MODEL NO. J74-4721

1-1/2" (38mm) COVE

A=2-1/4" (57mm), B=2-5/16" (59mm)

MODEL NO. J74-4723

1-3/4" (44mm) COVE

A=2-7/8" (73mm), B=2-11/16" (66mm)

MODEL NO. J74-4725

1-5/8" (41mm) COVE

A=2-9/16" (65mm), B=2-1/2" (63mm)

MODEL NO. J74-4730

1-3/8" (35mm) COVE



Brite Gard™ STAINLESS STEEL CLEANER/PROTECTANT

- CLEANS, SHINES & PROTECTS
- DOES NOT LEAVE OILY RESIDUE
- ENVIRONMENTALLY FRIENDLY – USES MANUAL PUMP SPRAYER, NOT AEROSOLS
- VIRTUALLY ELIMINATES FINGERPRINTS & SMUDGES
- SPECIFICALLY FORMULATED FOR USE ON INDOOR/OUTDOOR STAINLESS STEEL APPLIANCES
- SAFE – USES FOOD GRADE INGREDIENTS

MODEL NO.	DESCRIPTION	WT. PER BOTTLE	BOX/CASE QTY
Q85-2004	Pump Spray	4 fl. oz. (118ml)	Each
Q85-2016	Pump Spray	16 fl. oz. (474ml)	Each

MODEL NO.
Q85-2004

MODEL NO.
Q85-2016

Brite Gard® ALL PURPOSE WIPERS

- MADE WITH 25% RECYCLED CELLULOSE FIBERS
- PERFECT FOR HEAVY DUTY WET/DRY WIPING APPLICATIONS
- IDEAL FOR MOST METAL WORKING AND MESSY FLUID APPLICATIONS
- INTERFOLDS ARE PERFECT FOR JOBS THAT REQUIRE LARGE WIPERS
- TWO TIMES STRONGER THAN THE COMPETITION
- COST EFFECTIVE ALTERNATIVE TO CLOTH TOWELS & RAGS
- LOW LINT



MODEL NO.
Q85-8000
Q85-8500

MODEL NO.
Q85-7000
Q85-7500



HEAVY-WEIGHT QUARTERFOLD (60 count) MODEL NO. Q85-7000	LIGHT-WEIGHT QUARTERFOLD (90 count) MODEL NO. Q85-7500	SUPER STRENGTH INTERFOLD (126 count) MODEL NO. Q85-8000	LIGHT-WEIGHT INTERFOLD (135 COUNT) MODEL NO. Q85-8500
Sheet Size: 12-1/2" x 13" (138mm x 330mm)	Sheet Size: 12-1/2" x 13" (138mm x 330mm)	Sheet Size: 9-1/2" x 16-1/2" (241mm x 419mm)	Sheet Size: 9-1/2" x 16-1/2" (241mm x 419mm)
Sheet Per Case: 720	Sheet Per Case: 1080	Sheet Per Case: 1008	Sheet Per Case: 1080
Case Quantity: 12	Case Quantity: 12	Case Quantity: 8	Case Quantity: 8
Case Weight: 15lbs (7kg)	Case Weight: 15lbs (7kg)	Case Weight: 18lbs (8kg)	Case Weight: 20lbs (9kg)



CONVEYOR ROLLER COMPONENTS

CONVEYOR ROLLER COMPONENTS AND WHEELS

REF. A

STAINLESS STEEL CONVEYOR COMPONENTS

STAINLESS STEEL CONVEYOR BEARING

FLANGED BALL BEARING WHEEL ASSEMBLY FOR 1-5/8" (41mm) O.D. 16 ga (1.5mm) TUBING

MODEL NO. B29-0080

STAINLESS STEEL HEX AXLE ROD

7/16" (11mm) SOLID HEX AXLE ROD AVAILABLE IN 6 ft (1.9m) LENGTHS

MODEL NO. B80-0716

REF. B

PLASTIC CONVEYOR ROLLER BEARINGS

- STOCKED FOR 1.90" (48mm) O.D. TUBING
- MOLDED POLYPROPYLENE • DOUBLE LABYRINTH SEALS
- STAINLESS STEEL (18-8) BALLS • APPROVED FOR FOODSERVICE USE
- MAY BE STEAM CLEANED
- OPERATES AT TEMPERATURES UP TO 150°F (66° C)

MODEL NO.
IR-0312RD
IR-0312HX
IR-0375HX

SHAFT SIZE
5/16" (8mm) DIA.
5/16" (8mm) HEX
7/16" (11mm) HEX

REF. C

PVC ROUND TUBING (GRAY) FOR CONVEYOR ROLLERS

- 1.90" (48mm) O.D. FOR 1100 SERIES ROLLERS

MODEL NO. IR-1190
4 ft (1220mm) LENGTH



REF. D

STAINLESS STEEL WHEEL

MODEL NO. IR-1061

ZINC PLATED STEEL with OFFSET BUSHING

MODEL NO. IR-2112





REF. E

STAINLESS STEEL and STEEL WHEELS

- IDEAL FOR DRAWER SLIDES AND CONVEYOR ASSEMBLIES • HEAT TREATED INNER AND OUTER RACEWAYS • ALL METAL CONSTRUCTION

STAINLESS STEEL WHEEL
MODEL NO. IR-0031

STEEL WHEEL ZINC PLATED
MODEL NO. IR-2263






CONVEYOR ROLLER ASSEMBLIES

MADE TO ORDER COMPLETE ROLLER ASSEMBLIES

COMPLETE ROLLER ASSEMBLIES (TUBING AND SERIES 1100 PLASTIC ROLLER BEARINGS) ARE AVAILABLE FABRICATED TO INDIVIDUAL REQUIREMENTS.

THESE COMPLETE ASSEMBLIES PERMIT INDIVIDUAL SPECIFICATIONS OF TUBING DIAMETER AND MATERIAL, SHAFT MATERIAL, SHAFT SIZE AND A VARIETY OF MOUNTINGS. THE VARIABLES INCLUDE.



TUBING DIAMETERS

.78, 1.18, 1.90

(20mm, 28mm, 39mm, 48mm)

TUBING MATERIALS

PLASTIC (PVC), ALUMINUM AND STAINLESS STEEL

SHAFT MATERIALS

CARBON STEEL, ALUMINUM AND STAINLESS STEEL

SHAFT SIZES

FROM .192", .250" OR .312" DIA. AND 5/16" OR 7/16" HEX
(5mm, 6mm, 8mm) (8mm or 11mm)

MOUNTINGS

PLAIN, THREADED, TAPPED AND SPRING LOADED

NOTE: WE WELCOME YOUR INQUIRIES FOR SPECIFIC DESIGNS TO SATISFY YOUR INDIVIDUAL REQUIREMENTS. HOWEVER, NOT ALL COMBINATIONS ARE POSSIBLE. PLEASE CONTACT OUR SALES OFFICE FOR ASSISTANCE IN DESIGNING YOUR CUSTOM ROLLER ASSEMBLIES. ALLOW 4-6 WEEKS FOR DELIVERY OF COMPLETE ROLLER ASSEMBLIES.

CUSTOM CONVEYOR ROLLER ORDER FORM



INDICATE ROLLER SPECIFICATIONS BELOW.
NOTE: REFER TO THE MATRIX FOR AVAILABLE TUBING/SHAFT COMBINATIONS.

STANDARD LEAD TIME - 4 WEEKS ARO
CUSTOM ROLLERS ARE NOT RETURNABLE.

QUANTITY: _____

TUBE DIAMETER (in): _____

- 0.62
- .075
- 0.78
- 1.12
- 1.18
- 1.90


TUBE MATERIAL:
STAINLESS STEEL
GRAY PVC
ANODIZED ALUMINUM
MILL FINISH ALUMINUM
GALVANIZED STEEL

SHAFT TYPE:
SPRING LOADED
THREADED
END DRILLED AND TAPPED

SHAFT THREAD SIZE:
10-32
1/4-20
5/16-18

SHAFT MATERIAL:
CARBON STEEL
STAINLESS STEEL

SHAFT SIZE:
.192 DIA.
.250 DIA.
.312 DIA.
.312 HEX
.437 HEX

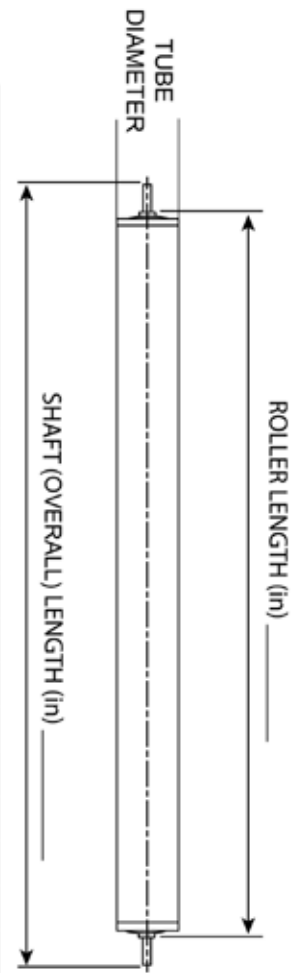

Tube Diameter	Tube Material	Wall Thickness	0.192" round C/S or S/S spring loaded	0.192" round C/S or S/S threaded 10-32	1/4" round C/S or S/S or aluminum spring loaded	1/4" round C/S or S/S threaded 1/4 - 20	5/16" round C/S or S/S spring loaded	5/16" round C/S or S/S threaded 5/16 - 18	5/16" hex C/S or S/S spring loaded	3/8" hex C/S spring loaded	7/16" hex C/S or S/S spring loaded	7/16" hex C/S or S/S end drilled and tapped 1/4 - 20 x 5/8 deep
0.62"	Polished S/S	.035"	•	•								
0.75"	Polished S/C	.035"			•	•						
	Anodized Aluminum	.035"			•	•						
0.78"	Gray PVC	.060"			•	•						
1.12"	Anodized Aluminum	.050"	•	•	•	•						
1.18"	Gray PVC	.070"	•	•	•	•						
	Mill Finish Aluminum	.065"					•	•	•	•	•	•
	Galvanized Carbon Steel	.065"					•	•	•	•	•	•
1.9"	Polished S/S	.065"					•	•	•	•	•	•
	Gray PVC	.11"					•	•	•	•	•	•




1890 Swarthmore Avenue • PO Box 2020 • Lakewood, NJ 08701
Tel 800-526-3694 • 732-363-4700 • Fax 732-364-8110
www.componenthardware.com

COMPANY NAME: _____
CONTACT: _____
PHONE: _____
EMAIL: _____
STREET: _____
CITY/STATE/ZIP: _____
P.O. #: _____

ORD-CHG-CONTROL Rev/11/2015

HOT SIDE

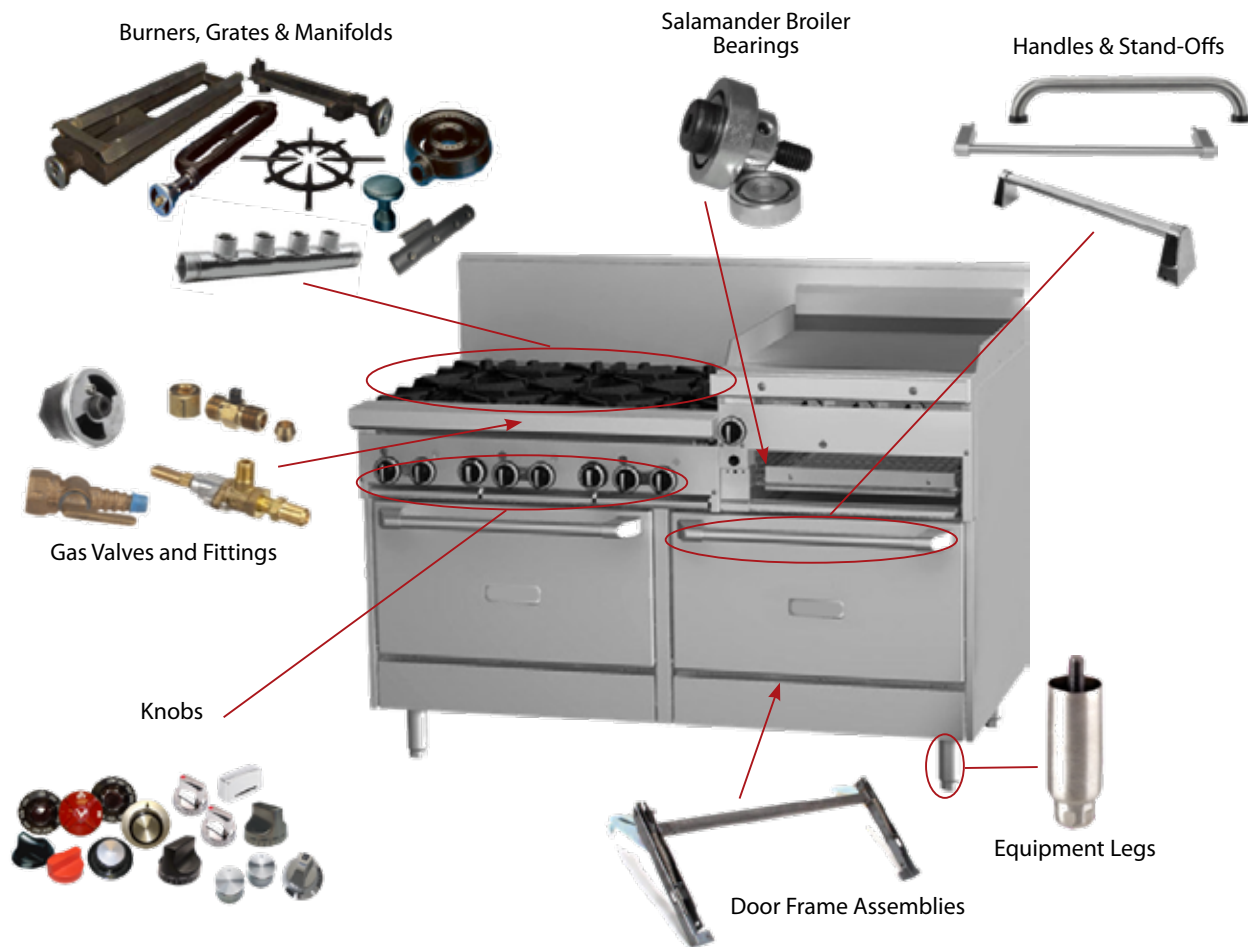

GAS & RING BURNERS	I213
GAS BURNER COMPONENTS	I214
HOT FOOD WELLS	I215
OVEN LATCHES & HINGES	I216
FRYER SPLASH GUARD	I217



CAST IRON GAS BURNERS

CAST IRON RING BURNER ASSEMBLIES


REF. C

LOOP BURNER

CAST IRON END INLET LOOP BURNER WITH AIR MIXING CHAMBER AND ORIFICE

- DURABLE BLACK CAST IRON CONSTRUCTION • 17" L X 3-1/2" W OVERALL • 30,000 BTU/HR
- FURNISHED WITH AIR MIXING CHAMBER, ADJUSTABLE AIR MIXING COVER PLATE AND ORIFICES FOR BOTH LP AND NATURAL GAS

MODEL NO. G27-1250

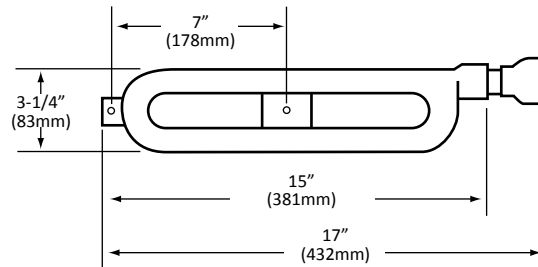

REF. B


RING BURNER

CAST IRON RING BURNER ASSEMBLY WITH VALVE, AIR MIXING CHAMBER AND RANGE COCK HANDLE

- 22,000 BTU PER HOUR • 6" BURNER DIAMETER
- INCLUDES AIR MIXING CHAMBER AND SLIP FIT BURNER VALVE WITH INSULATED RANGE COCK HANDLE

MODEL NO. G12-6550

RATING: 22,000 BTU/HR

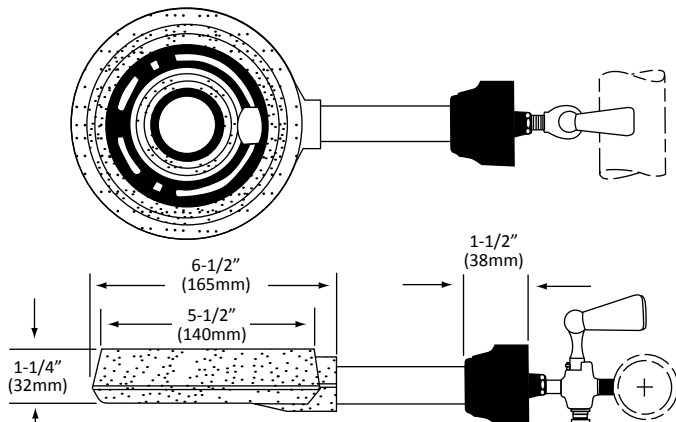

NOTE: MANIFOLD AND NIPPLE (3/4" N.P.T.) NOT SUPPLIED
6" RING BURNER ONLY **MODEL NO. G12-X001**

REF. D


RING BURNER

CAST IRON RING BURNER ASSEMBLY WITH VALVE, AIR MIXING CHAMBER AND BLACK CONTROL KNOB


- 22,000 BTU PER HOUR • 6" BURNER DIAMETER
- INCLUDES AIR MIXING CHAMBER, SLIP FIT BURNER VALVE AND BLACK THERMOPLASTIC CONTROL KNOB

MODEL NO. G10-6550

RATING: 22,000 BTU/HR

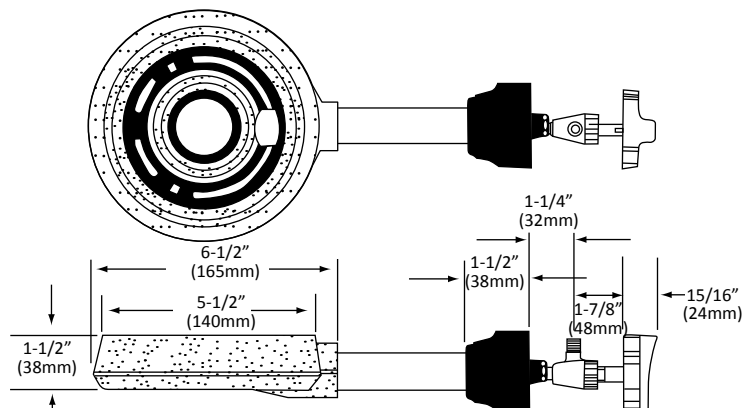

NOTE: MANIFOLD AND NIPPLE (3/4" N.P.T.) NOT SUPPLIED

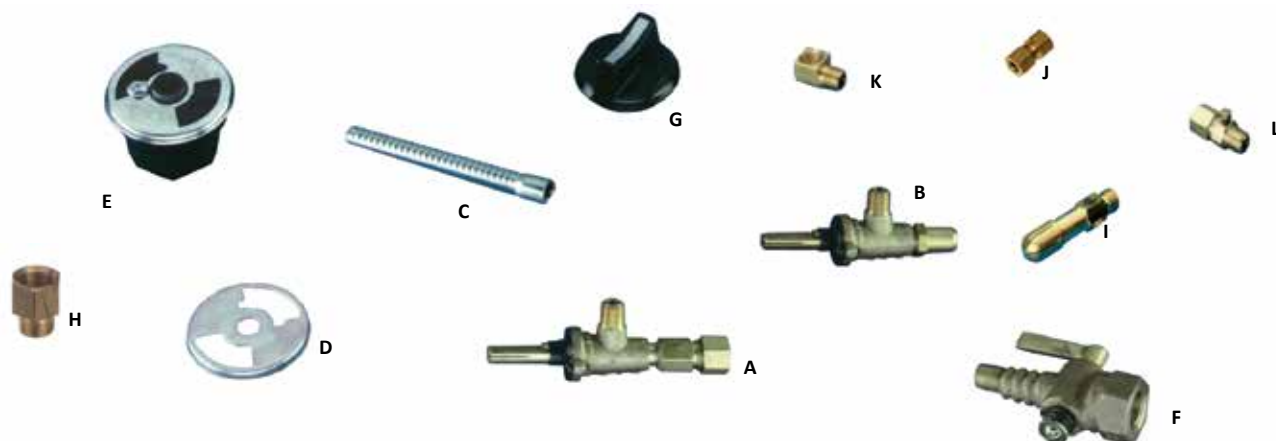

REF. A

BURNER VALVES

1/8" NPT MALE INLET BRASS COMPRESSION
FIT BURNER VALVE

- 1/8" N.P.T. MALE INLET
- FOR 5/16" OD TUBING

MODEL NO. G40-6451

REF.B

BURNER VALVES

1/8" NPT MALE INLET BRASS BURNER VALVE
WITH ADJUSTABLE SLIP FIT ORIFICE

- FOR LP OR NATURAL GAS • 1/8" NPT MALE INLET
- #72 TO #42 ADJUSTABLE ORAFICE

MODEL NO. G40-6452

REF. C

BURNER VALVE EXTENSION

ZINC PLATED STEEL BURNER VALVE EXTENSION

- PERMITS UP TO 3" EXTENSION OF THE BURNER VALVE POST
- FITS MOST STANDARD, SLOTTED, D-SHAPED BURNER VALVE
HANDLES

MODEL NO. G48-0005

REF. D

AIR MIXING PLATE

ZINC PLATED STEEL AIR MIXING PLATE

- FOR USE WITH G46 SERIES AIR MIXING CHAMBERS

MODEL NO. G44-4360

REF. E

AIR MIXING CHAMBER

CAST IRON AIR MIXING CHAMBER WITH AIR MIXING PLATE
FOR 1/8" NPT THREADED ORIFICE

- 1/8" NPT INLET • 3/4" NPT OUTLET • SUPPLIED WITH ZINC
PLATED
ADJUSTABLE AIR MIXING PLATE AND SCREW

MODEL NO. G46-4360

CAST IRON AIR MIXING CHAMBER WITH
AIR MIXING PLATE FOR SLIP FIT ORIFICE

- 7/16" SLIP FIT INLET • 3/4" NPT OUTLET • SUPPLIED WITH ZINC
PLATED ADJUSTABLE AIR MIXING PLATE AND SCREW

MODEL NO. G46-4361

REF. F

BURNER VALVE

1/8" NPT MALE INLET X 3/8" NPT FEMALE OUTLET
BRASS BURNER VALVE WITH BRASS HANDLE

- 1/8" N.P.T. MALE INLET • 3/8" N.P.T. FEMALE

MODEL NO. G38-5330

REF. G

VALVE HANDLE

BLACK THERMOPLASTIC BURNER CONTROL KNOB

- FITS MOST STANDARD .35" DIAMETER D-STEM BURNER VALVES
- KNOB DOES NOT INCLUDE ANY INDICATOR MARKINGS

MODEL NO. G50-5420

REF. H

BRASS THREADED ORIFICE

1/8" NPT FEMALE X 1/8" NPT MALE BRASS THREADED ORI-
FICE

- 1/8" NPT FEMALE INLET X 1/8" NPT MALE OUTLET
- FURNISHED WITH #70 ORIFICE HOLE
- CONSULT LOCAL GAS UTILITY COMPANY FOR RECOMMENDED
ORIFICE HOLE DIAMETER FOR THE TYPE OF FUEL, FEED PRESSURE
AND ATMOSPHERIC PRESSURE BEING USED

MODEL NO. G36-4370

REF. I

JET BURNER, BRASS

- FOR USE WITH LP GAS • #77 ORIFICE
- 7/16-24 THREAD • 2-1/16" LONG

MODEL NO. G28-6491

REF. J

COUPLING, BRASS

1/8" N.P.T. FEMALE INLET FOR 5/16" (8mm) O.D. TUBING

MODEL NO. G32-6470

REF. K

ELBOW, BRASS

1/8" N.P.T. FOR USE WITH G28-6491

MODEL NO. G30-6480

REF. L

PILOT VALVE, BRASS ADJUSTABLE

1/8" N.P.T. MALE INLET FOR 1/4" (6mm) O.D. TUBING


MODEL NO. G34-6460



LATCH ASSEMBLY


MODEL NO. M23-5000

- SPRING LOADED TO POSITIVELY HOLD DOOR CLOSED
 - LIQUID TIGHT-WELDED CONSTRUCTION
- LIFE CYCLE TESTED FOR OVER 50,000 CYCLES
 - LONG LIFE BRASS ALLOY ROLLERS
 - STABLE TWO ROLLER DESIGN
- NON MAGNET-POSITIVE MECHANICAL
 - STAINLESS STEEL HOUSING
- PRE-SET TENSION-NO ADJUSTMENT REQUIRED
- CAN BE MOUNTED IN DOOR FRAME OR DOOR IN ANY ORIENTATION
- CONTINUOUS OPERATING TEMPERATURE: 400°F
 - MAX TEMPERATURE: 600°F

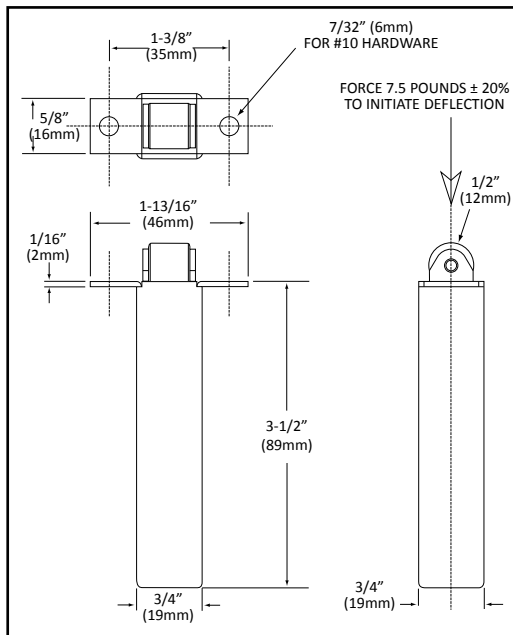


SINGLE ACTION EDGEMOUNT OVEN LATCHES

SINGLE ACTION DESIGN FOR OVEN USE.
FURNISHED WITH HEAT RESISTANT
BRONZE
ROLLER AND INSULATED HANDLE.
MODEL NO. R35-3105-X



SINGLE ACTION
FEATURES POSITIVE PRESSURE SEAL.

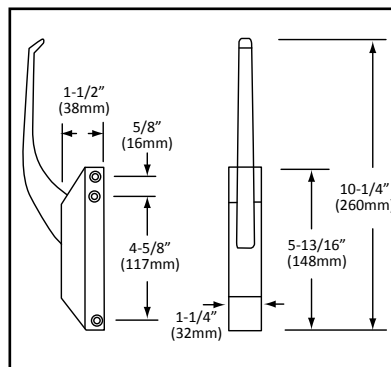

CASE & HANDLE: DIE CAST METAL
STRIKE PLATE: PLATED STEEL
FINISH: CHROME PLATE
DRILLED AND
COUNTERSUNK
FOR NO. 10 SCREWS

SPECIFICATIONS:



NON-RISE / ADJUSTABLE HIGH TEMP HINGE


**FOR HEATED CABINETS &
COMMERCIAL OVENS**

MODEL NO. R42-2843*

- RATED TO 500°F (260°C) • NON- HANDED
- SOLID BRASS FORGED CONSTRUCTION SPECIFICALLY DESIGNED FOR HIGH TEMPERATURE USE ON CABINETRY AND OVENS WHERE SURFACE TEMPERATURE IS A CONCERN
- MOUNTING HOLE LOCATIONS ARE INTERCHANGEABLE WITH COMPETITORS' HINGES
- NON-RISE FUNCTION ALLOWS FOR EASY DOOR SWING WITHOUT CONCERN FOR DOOR RISE
- SERRATED ADJUSTING PLATE ALLOWS FOR QUICK AND EASY DOOR ADJUSTMENT TO COMPENSATE FOR DOOR SAG
- CHROME PLATED CONTEMPORARY STYLING

1-1/8" (28mm) OFFSET

*OPTIONAL POWER SPRING CONVERSION KIT
MODEL NO. R42-2800 AVAILABLE - SEE PG B46

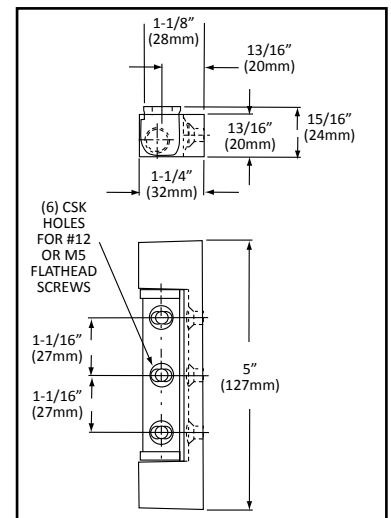

ADJUSTMENT PLATE PERMITS 3/16" (5mm)
ADJUSTMENT DRILLED AND COUNTERSUNK
FOR NO.10 SCREWS

HOT FOOD WELLS

- ALL STAINLESS STEEL • STANDARD 12 X 20 SIZE
- AVAILABLE WITH OR WITHOUT DRAIN HOLE



REF.	MODEL NO.	DIMENSIONS	DESCRIPTION
A	S82-1220	22" x 14" x 6"	No Drain
B	S82-1220-DR	21.5" x 13.5" x 6"	With Drain Hole
Not Shown	S82-1220-DRA	21.5" x 13.5" x 6"	With Strainer Drain
Not Shown	S82-1220-SPSS	12" x 20"	No Drain, 20 Gauge, Type 304



FRYER SPLASH GUARD

- STAINLESS STEEL
- UNIVERSAL DESIGN

MODEL NO. FRY90-1000

FABRICATION SUPPLIES



POLISH & CLEANING PRODUCTS	J217	TAPES, BRAKE FILM & PADS	J227
COMPOUNDS & SEALERS	J218	PAINT, SPRAYS & FOGGERS	J228
WELD STUDS, FASTENERS & RIVITS	J219		
PORTABLE STUD WELDER	J220		
ABRASIVE DISCS & PADS	J221		
CARTRIDGE ROLLS & MOUNTED STONES	J222		
BRUSHES, TOOLS & MARKING PENS	J223		
TAPS, DRILLS & SAW BLADES	J224		
DRILL BIT DECIMAL EQUIVALENTS	J225		
TAP DRILL SIZES	J226		



REF. A

BRITE GARD™ STAINLESS STEEL CLEANER/PROTECTANT

- CLEANS, SHINES & PROTECTS • SPECIFICALLY FORMULATED FOR USE ON INDOOR/OUTDOOR STAINLESS STEEL APPLIANCES
- SAFE – USES FOOD GRADE INGREDIENTS • VIRTUALLY ELIMINATES FINGERPRINTS & SMUDGES • ENVIRONMENTALLY FRIENDLY – USES MANUAL PUMP SPRAYER, NOT AEROSOLS

MODEL NO.	DESCRIPTION	UNIT PACK
Q85-2004	4 oz Bottle	Each
Q85-2016	16 oz Bottle	Each

REF. C

SHEILA SHINE® STAINLESS STEEL POLISH AND SURFACE PRESERVATIVE

- ECONOMICAL • CLEANS, POLISHES, PROTECTS
- PRESERVES SURFACES AGAINST DETERIORATION
- RESISTS FINGERPRINTS AND STREAKING
 - IDEAL FOR FORMICA SURFACES
- G.S.A. APPROVED • U.S.D.A. AUTHORIZED

MODEL NO. Q85-1010
10 oz (283g) AEROSOL CAN

MODEL NO. Q85-1012
ONE gal (3.7 lit) CONTAINER

REF. B

BRITE GARD® ALL PURPOSE WIPERS

- MADE WITH 25% RECYCLED CELLULOSE FIBERS • PERFECT FOR HEAVY DUTY WET/DRY WIPING APPLICATIONS
- IDEAL FOR MOST METAL WORKING AND MESSY FLUID APPLICATIONS • INTERFOLDS ARE PERFECT FOR JOBS THAT REQUIRE LARGE WIPERS
- TWO TIMES STRONGER THAN THE COMPETITION • COST EFFECTIVE ALTERNATIVE TO CLOTH TOWELS & RAGS • LOW LINT



HEAVY-WEIGHT QUARTERFOLD (60 count) MODEL NO. Q85-7000	LIGHT-WEIGHT QUARTERFOLD (90 count) MODEL NO. Q85-7500	SUPER STRENGTH INTERFOLD (126 count) MODEL NO. Q85-8000	LIGHT-WEIGHT INTERFOLD (135 COUNT) MODEL NO. Q85-8500
Sheet Size: 12-1/2" x 13" (138mm x 330mm)	Sheet Size: 12-1/2" x 13" (138mm x 330mm)	Sheet Size: 9-1/2" x 16-1/2" (241mm x 419mm)	Sheet Size: 9-1/2" x 16-1/2" (241mm x 419mm)
Sheet Per Case: 720	Sheet Per Case: 1080	Sheet Per Case: 1008	Sheet Per Case: 1080
Case Quantity: 12	Case Quantity: 12	Case Quantity: 8	Case Quantity: 8
Case Weight: 15lbs (7kg)	Case Weight: 15lbs (7kg)	Case Weight: 18lbs (8kg)	Case Weight: 20lbs (9kg)



REF. A

SILICONE SEALER

SILICONE SEALANT 10.3 oz (305ml) CARTRIDGE



- FITS ALL STANDARD CAULKING GUNS
- F.D.A APPROVED • U.L. RECOGNIZED
- MEETS F.D.A. EXTRACTION REQUIREMENT NO. 21 CFR177.2600
- SUPPLIED WITH A REMOVABLE TIP

MODEL NO.	COLOR	MAXIMUM SERVICE TEMP.
M90-1010	Clear	392°F (200°C)
M90-1012	Aluminum	392°F (200°C)
M90-1014	White	392°F (200°C)
M90-1016	Black	392°F (200°C)
M90-1018	Hi Temp Red	500°F (315°C)

ALSO AVAILABLE IN 3 oz (83g) TUBES
CLEAR: M90-0310 ALUMINUM: M90-0312
WHITE: M90-0314 HIGH TEMP RED: M90-0318
PACKAGED 20 PER PACK

5 gal CLEAR (19 lit): MODEL NO. M90-5012

REF. C

10.3 Oz. (305ml.)
CAULKING GUN

- BLUE PAINTED STEEL CONSTRUCTION INCLUDES METAL ROD FOR CLEARING HARDENED PLUGS OR PIERCING METAL FOIL SEAL ON TUBES
- FURNISHED WITH INTEGRAL BLADE TO CUT TIP OF TUBE
- QUICK RELEASE TAB ON HANDLE IMMEDIATELY RELEASES PRESSURE ON BASE OF TUBE TO STOP FLOW

MODEL NO. Q99-1000
THERMAL MASTIC CAULKER

REF. B

THERMAL MASTIC
HEAT TRANSFER COMPOUND

- REPLACES SOLDER FOR HEAT TRANSMISSION
- STABLE AT ALL WORKING TEMPERATURES

Thermal mastic is used wherever rapid heat transmission is desired between coils and liners, between liquid and suction line heat exchangers.

MODEL NO. Q77-1000 THERMAL MASTIC COATING
10.3 Oz. (305ml) TUBE CARTRIDGE

MODEL NO. Q77-1250 THERMAL MASTIC COATING
5 GALLON (19 LITER) CONTAINER

MODEL NO. Q77-1260 THERMAL MASTIC COATING
53 GALLON (200 LITER) CONTAINER

REF. D

LATEX
SOUND DEADENER




- FOR SHEET METAL RESONANCE, DAMPING AND NOISE CONTROL, SMOOTH FLOWING LATEX SOUND DEADENER IS PREPARED SPECIFICALLY FOR BRUSH AND SPRAY APPLICATION. MATERIAL IS NON-AGING, DOES NOT BECOME BRITTLE AND MAY BE PAINTED WHEN DRY.

COLOR: LIGHT GRAY

MODEL NO. Q75-1366 ONE GALLON (3.7 liter) CONTAINER
MODEL NO. Q75-1366-DR 53 GALLON (200 liter) DRUM

NOTE: ONE GALLON (3.7 LITER) COVERS APPROXIMATELY
30-50 SQ. FT. (2.8-4.6 SQ. METERS)

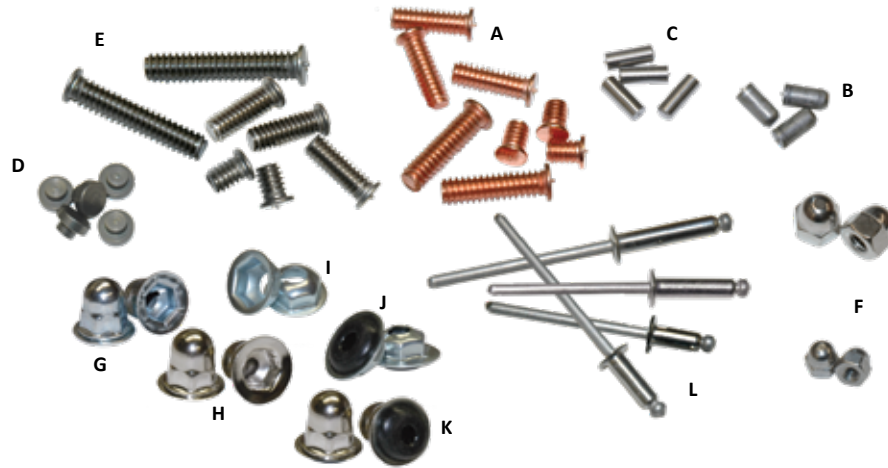

REF. A
**COPPER FLASHED
WELD STUDS CD TYPE**

MODEL NO.	SIZE	LENGTH
Q36-1010	10-24	3/8" (9mm)
Q36-1012	10-24	1/2" (13mm)
Q36-1013	10-24	5/8" (16mm)
Q36-1014	10-24	3/4" (19mm)
Q36-1018	10-24	1-1/2" (38mm)
Q36-1310	1/4-20	3/8" (9mm)
Q36-1312	1/4-20	1/2" (13mm)
Q36-1314	1/4-20	3/4" (19mm)
Q36-1316	1/4-20	1" (25mm)

NOTE: OTHER SIZES (IN QUANTITY)


**THREADLESS WELD STUDS
18-8 STAINLESS STEEL**

REF. B
MODEL NO. Q37-1412
1/4" DIA. X 1/2" LG.
(6mm DIA. X 13mm LG.)

REF. C
MODEL NO. Q37-3162
3/16" DIA. X 1/2" LG.
(4.7mm DIA. X 13mm LG.)

REF. D
**STAINLESS KEYHOLE
WELD STUDS**

MODEL NO. Q37-0250

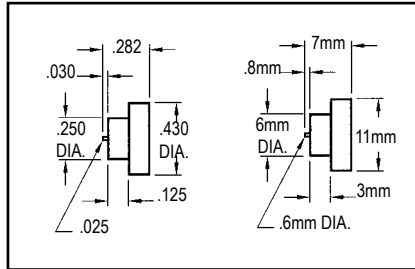

REF. E
**STAINLESS STEEL WELD STUDS
CD TYPE**
18-8 STAINLESS STEEL

MODEL NO.	SIZE	LENGTH
Q36-1110	10-24	3/8" (9mm)
Q36-1112	10-24	1/2" (13mm)
Q36-1113	10-24	5/8" (16mm)
Q36-1114	10-24	3/4" (19mm)
Q36-1116	10-24	1" (25mm)
Q36-1410	1/4-20	3/8" (9mm)
Q36-1412	1/4-20	1/2" (13mm)
Q36-1414	1/4-20	3/4" (19mm)
Q36-1416	1/4-20	1" (25mm)

NOTE: OTHER SIZES (IN QUANTITY)

REF. F
STAINLESS STEEL CAP NUTS

MODEL NO.	SIZE	INTERNAL SCREW HEIGHT CLEARANCE
Q31-1024	10-24	5/16" (8mm)
Q31-1420	1/4-20	3/8" (9.5mm)

**COMBINATION LOCKNUT
HEX NUT/LOCKWASHER**

SIZE	REF.	MODEL NO.	SIZE	MATERIAL
	G**	Q34-1024	10-24	Zinc Plated
	H**	Q34-2024	10-24	Bright Nickel
	I	Q32-1024	10-24	Zinc Plated
	J	Q33-1024*	10-24	Zinc Plated
	K**	Q33-2024*	10-24	Bright Nickel
	I	Q32-1420	1/4-20	Zinc Plated


*WITH RUBBER SEALING UNDERSIDE

**INTERNAL SCREW HEIGHT
CLEARANCE OF 1/2" (13mm)

REF. L
**STAINLESS STEEL BLIND RIVETS
1/8" (3mm) DIA. DOMED HEAD**

MODEL NO.	GRIP RANGE	RIVET LENGTH
Q45-4200	.062 - .125 (1.5mm - 3mm)	.275 (7mm)
Q45-4300	.126 - .187 (3mm - 5mm)	.337 (8.5mm)
Q45-4400	.188 - .250 (5mm - 6mm)	.400 (10mm)
Q45-4600	.315 - .375 (8mm - 9.5mm)	.525 (13mm)
Q45-4800	.376 - .500 (9.5mm - 13mm)	.600 (15mm)

**300 SERIES
STAINLESS STEEL RIVETS AND MANDRELS
WITH BRIGHT PASSIVATED FINISH**

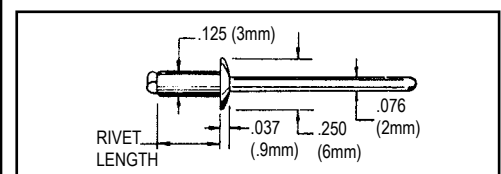



STUD WELDING
COLLETS

• CASE HARDENED

REF	MODEL NO.	USED WITH:
A	*QTC-1024	10-24 Weld Stud
A	*QTC-1420	1/4-20 Weld Stud
A	*QTC-0716	7/16 Weld Stud
B	QIC-1024	10-24 Weld Stud
B	QIC-1420	1/4-20 Weld Stud
C	QOR-1024	10-24 Weld Stud
C	QOR-1420	1/4-20 Weld Stud
C	QOR-0716	7/16 Keyhole Stud
D	QBC-1024	10-24 Threaded Base Stud Welding Collet
E	QBC-0716	10-24 Threaded Base Stud Welding Collet

*MODEL NO'S QTC-1024, QTC-1420, QTC-0716 AND QTC-0012 (REF. A) FIT PORTABLE STUD WELDERS NO. Q36-0001 AND Q36-0028.



PORTABLE STUD WELDERS

MODEL NO. Q36-0001

- PORTABLE, LIGHTWEIGHT, RUGGED AND EASY TO USE, PERFECT FOR HIGH FREQUENCY PRODUCTION OR FIELD USE
- CONVENIENT 110 VOLT FOR UNIVERSAL APPLICATION AND VERSATILITY
- FAST POWER RECOVERY, IMMEDIATE RECHARGE, CAPACITY TO 5/16"(8mm) DIAMETER STUDS
 - WELD RATE 15 STUDS PER MINUTE
- TROUBLE FREE SOLID STATE DESIGN, SINGLE VOLTAGE CONTROL KNOB, SIMPLE SETTING, DIGITAL POWER DISPLAY
- SAFE, AUTOMATIC POWER DISCHARGE ON ANY POWER FAILURE STUD CONTACT REQUIRED TO FIRE CIRCUIT

INCLUDES

- SINGLE FIRE TRIGGER
- 16 FT.(4.8m) CORDSET AND EASY TO USE GROUND CLAMP



18" STUD GUN
EXTENSION

MODEL NO. Q36-X100

- CONVENIENT FOR REMOTE AREAS WHERE A STANDARD GUN CANNOT REACH



MODEL NO. Q36-0028

- FAST POWER RECOVERY, IMMEDIATE RECHARGE, CAPACITY TO 1/4"(6mm) DIAMETER STUDS
 - WELD RATE 12 STUDS PER MINUTE
- LIGHTWEIGHT AND VERSATILE- WEIGHS ONLY 28 LBS - IDEAL FOR WELDING AT INSTALLATION SITE OR WHERE ONE STUD WELDER MAY BE REQUIRED IN SEVERAL WORK AREAS
- SAFE AND TROUBLE FREE...INCORPORATES THE SAME SOLID STATE TECHNOLOGY AND SAFETY FEATURES AS OUR LARGER UNIT


REF. A

SAIT ZIRCONIA FIBRE SANDING DISCS BLUE SAIT ZIRCONIA ALUMINA FIBRE SANDING DISC

- FOR HEAVY STOCK REMOVAL
- FOR STAINLESS STEEL OR FLAT GRINDING OF MILD STEEL
- COOL CUTTING AND LONG LASTING

MODEL NO.	GRIT	DIA.	ARBOR
AN-5080	80	5" (125mm)	7/8" (22mm)
AN-7080	80	7" (178mm)	7/8" (22mm)

PACKAGED 100 DISCS PER PACK

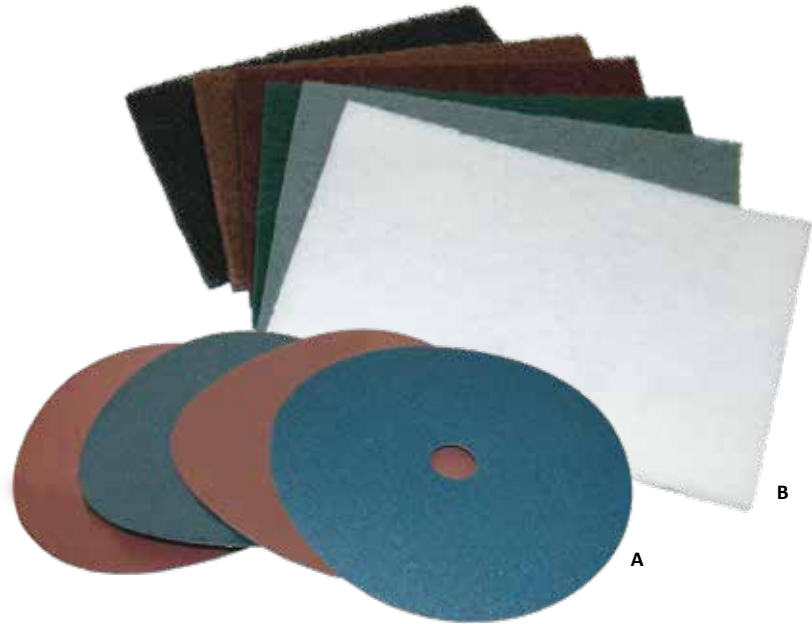

REF. A

4" SAIT ALUMINUM OXIDE ABRASIVE DISCS RED SAIT RESIN FIBRE ALUMINUM OXIDE SANDING DISCS (3A)

- SPECIFICALLY DESIGNED FOR STAINLESS STEEL APPLICATIONS
- RUNS COOLER WITH HIGHER STOCK REMOVAL

MODEL NO.	GRIT	DIA.	ARBOR
AK-4036	36	4" (102mm)	7/8" (22mm)
AK-4060	60	4" (102mm)	7/8" (22mm)
AK-4080	80	4" (102mm)	7/8" (22mm)
AK-4120	120	4" (102mm)	7/8" (22mm)

PACKAGED 100 DISCS PER PACK

REF. A

5" SAIT ALUMINUM OXIDE ABRASIVE DISCS RED SAIT RESIN FIBRE ALUMINUM OXIDE SANDING DISCS (3A)

- SPECIFICALLY DESIGNED FOR STAINLESS STEEL APPLICATIONS
- RUNS COOLER WITH HIGHER STOCK REMOVAL

MODEL NO.	GRIT	DIA.	ARBOR
AK-5036	36	5" (125mm)	7/8" (22mm)
AK-5060	60	5" (125mm)	7/8" (22mm)
AK-5080	80	5" (125mm)	7/8" (22mm)
AK-5100	100	5" (125mm)	7/8" (22mm)
AK-5120	120	5" (125mm)	7/8" (22mm)

5" (125mm) SPIRALCOOL BACKING PAD
AVAILABLE. SPECIFY **AZ-95016**
PACKAGED 100 DISCS PER PACK

REF. A

7" SAIT ALUMINUM OXIDE ABRASIVE DISCS RED SAIT RESIN FIBRE ALUMINUM OXIDE SANDING DISCS (3A)

- SPECIFICALLY DESIGNED FOR STAINLESS STEEL APPLICATIONS
- RUNS COOLER WITH HIGHER STOCK REMOVAL

MODEL NO.	GRIT	DIA.	ARBOR
AK-7080	80	7" (178mm)	7/8" (22mm)
AK-7100	100	7" (178mm)	7/8" (22mm)
AK-7120	120	7" (178mm)	7/8" (22mm)

7" (178mm) SPIRALCOOL BACKING PAD
AVAILABLE. SPECIFY **AZ-95018**
PACKAGED 100 DISCS PER PACK



ABRASIVE DISC CUTTER

MODEL NO. ACD-8100
PROLONGS THE LIFE OF 7" (178mm) FIBRE DISCS BY CREATING A NEW SURFACE. ADJUSTABLE FOR DIAMETERS FROM 3" (76mm) TO 9" (229mm).

MODEL NO. ACD-8102
REPLACEMENT UPPER CUTTER BLADE

MODEL NO. ACD-8104
REPLACEMENT LOWER CUTTER BLADE

REF. B

SAIT ABRASIVE HAND PADS

- FOR CLEANING, FINISHING, POLISHING AND BLENDING
- MAY BE USED WET OR DRY
- SIZE: 6" x 9" (150mm x 225mm)

MODEL NO.	GRADE	COLOR	ABRASIVE
AK-7446-AP	Stainless Steel	Black	Aluminum Oxide
AK-7448-AP	Ultra Fine	Gray	Silicone Carbide
AK-7447-AP	General Purpose	Maroon	Silicone Carbide
AK-7440-AP	Heavy Duty	Brown	Aluminum Oxide
AK-7496-AP	Stipper	Green	Aluminum Oxide
AK-7486-AP	Light Duty	White	Talc

PACKAGED 20 PADS PER PACKAGE



REF. A

**PREMIUM
RESIN BONDED
STRAIGHT CARTRIDGE ROLLS**

- EXTREMELY HIGH QUALITY AND LONG LASTING
- MANUFACTURED OF ALUMINUM OXIDE RESIN BOND CLOTH
- SPECIFICALLY DESIGNED FOR STAINLESS STEEL APPLICATIONS
- PROVIDES FOR FAST DEBURRING AND FINISHING OF ALL STAINLESS STEEL
- SPECIALLY FORMED WITH A HIGH PERFORMANCE PHENOLIC RESIN WITHSTANDING EXTREME HEAT AND MOISTURE

MODEL NO.	DIA.	LENGTH	SHANK DIA.	GRIT	MAX RPM
AC-3011	5/8" (16mm)	2" (51mm)	1/4"	50	18000
AC-3019	5/8" (16mm)	2" (51mm)	1/4"	60	18000
AC-3014	1" (25mm)	2" (51mm)	1/4"	50	15000
AC-3018	3/8" (9mm)	1-1/2" (38mm)	1/8"	60	26000
AC-3015	1-1/2" (38mm)	2" (51mm)	1/4"	50	15000
AC-3022	1-1/2" (38mm)	2" (51mm)	1/4"	60	15000
AC-3718	1" (38mm)	2" (51mm)	1/4"	60	15000
AC-2226	1/4" (6mm)	Cartridge Roll Mandrel			

- PACKED 100 PER CARTON
- OTHER SIZES AVAILABLE UPON REQUEST

REF. B

**PREMIUM
RESIN BONDED
MOUNTED STONES**

- MANUFACTURED OF ALUMINUM OXIDE GRAIN FOR FAST DEBURRING AND FINISHING OF STAINLESS STEEL
- PERFORMS WITHOUT VIBRATION OR RUN-OUT
- EASY TO IDENTIFY AND MAINTAIN INVENTORY
 - SUPPLIED WITH COARSE 36 GRIT

MODEL NO.	DIA.	LENGTH	SHANK DIA.	MAX RPM O= 1/2"	TYPE
AQ-7401	3/4" (19mm)	2" (51mm)	1/4"	19,800	A1
AQ-7402	1" (25mm)	2" (51mm)	1/4"	16,100	A3
AQ-7405	7/8" (22mm)	2-1/2" (64mm)	1/4"	19,860	A11
AQ-7408	3/8" (9mm)	1-1/4" (31mm)	1/4"	45,750	W179
AQ-7411	3/4" (19mm)	2-3/4" (70mm)	1/4"	24,000	W208
AQ-7413	1" (25mm)	2" (51mm)	1/4"	18,750	W222
AQ-7409	1/2" (12mm)	2" (51mm)	1/4"	15,900	W189

PACKED 10 PER CARTON - OTHER SIZES AVAILABLE UPON REQUEST

SILHOUETTES DO NOT REPRESENT ACTUAL DIMENSIONS

A1 A3 A11

"W" SHAPES ARE FOR MEDIUM TO HEAVY STOCK REMOVAL

MANDREL OVERHANG "O" MUST ALWAYS BE THE LOWEST POSSIBLE. MAXIMUM SPEEDS GIVEN REFER TO OVERHANG "O" EQUAL TO 1/2".

OVERHANG = 1/2"



REF. A

MARKING PENS

SPECIFICALLY DESIGNED FOR LAYOUT
WORK ON STAINLESS STEEL

EXTRA FINE POINT, 0.4MM LINE WIDTH ON NON-POROUS
SURFACES. PERMANENT ON MOST SURFACES. WATER RESISTANT.

BLUE MODEL NO. Q91-3503 (DOZEN)

RED MODEL NO. Q91-3505 (DOZEN)

REF. B

STAINLESS STEEL WIRE BRUSHES

IDEAL FOR CLEANING WELDING TIPS AND CASTINGS
REMOVES WELD BURNS, SCALE, PAINT AND RUST
FROM ALL METAL SURFACES. CUSTOM HARDWOOD
SHAPED HANDLES

MODEL NO.	HANDLE LENGTH	WIRE CONFIG.
Q59-4440	10-1/4" (260mm)	Rows: 4 x 16
Q59-1500	7-5/8" (190mm)	20 Tufts*

*LACED THRU HANDLE

REF. C

DEBURRING TOOL

- A FAST, CONVENIENT, INEXPENSIVE DEBURRING TOOL
- IDEAL FOR STAINLESS STEEL, ELIMINATES COSTLY FILING
 - ADJUSTABLE FOR ALL GAUGES
- SAFELY AND QUICKLY DEBUR METAL EDGES FOR EASIER HANDLING
 - ROTATE BLADES TO PROLONG TOOL LIFE

**ADJUSTABLE DEBURRING TOOL
MODEL NO. DBR-1000**

REF. D

**REPLACEMENT ROLLERS (PAIR)
MODEL NO. DBR-1000-RR**

REF. E

**REPLACEMENT ROLLER SCREW
MODEL NO. DBR-1000-RS**



HACKSAW BLADES

- REF. A
- 12" LG. x 1/2" WIDE (300mm x 13mm)
 - EXCELLENT FOR STAINLESS STEEL
 - PRECISION GROUND TEETH FOR ALL KINDS OF METAL SAWING
 - BLADE BACK MADE OF STRONG, FLEXIBLE SPRING STEEL WITH A TOOTH LINE OF HIGH-ALLOYED SUPER HIGH-SPEED STEEL CONSTRUCTION GUARANTEES THE BLADE TO KEEP ITS SHARPNESS FOR A LONG TIME
 - COMBINE EXTREME CUTTING PERFORMANCE AND WEAR RESISTANCE WITH A HIGH DEGREE OF FLEXIBILITY
 - 12" L X 1/2" W X .025" H BI-METAL BLADE

MODEL NO.	TEETH PER INCH (25mm)	THICKNESS
FR-1218	18	.025 (.6mm)
FR-1224	24	.025 (.6mm)

PACKAGED 100 BLADES PER PACK

RECIPROCATING SAW BLADES

- REF. B
- BI-METAL BLADE FOR ALL MATERIALS AND TYPES OF CUTS
 - SPECIFICALLY DESIGNED FOR CUTTING METAL
 - STANDARD SHAPE WITH IMPROVED PERFORMANCE AND PRECISION GROUND TEETH FOR FAST AND AGGRESSIVE STRAIGHT CUTS

MODEL NO.	SIZE	TEETH PER INCH (25mm)
FR-88162	4" (102mm)	18
FR-88163	4" (102mm)	24
FR-88178	6" (152mm)	18
FR-88179	6" (152mm)	24

PACKAGED 5 BLADES PER PACK

TAPS

- REF. C
- AVAILABLE IN THE FIVE MOST FREQUENTLY USED SIZES
- UNION BUTTERFIELD #1528UNC HIGH QUALITY STRAIGHT FLUTE HAND TAP - PLUG CHAMFER
 - FOR THROUGH OR BLIND HOLE APPLICATIONS • HIGH SPEED STEEL FOR GOOD WEAR RESISTANCE ON BOTH FERROUS AND NON-FERROUS METALS • FLASH CHROME FINISH FOR BETTER CHIP FLOW ON SOFTER MATERIALS SUCH AS ALUMINUM
 - UNC RIGHT-HAND THREAD TAP
 - SPIRAL POINT • 4 FLUTE DESIGN
 - H3 THREAD LIMIT
 - 2-3/8" L X 0.194 SHANK DIAMETER WITH 7/8" THREAD LENGTH
 - UNION BUTTERFIELD #1534 UNC HIGH QUALITY STRAIGHT FLUTE GUN TAP - PLUG CHAMFER
 - FOR THROUGH OR BLIND HOLE APPLICATIONS • HIGH SPEED STEEL FOR GOOD WEAR RESISTANCE ON BOTH FERROUS AND NON-FERROUS METALS
 - FLASH CHROME FINISH FOR BETTER CHIP FLOW ON SOFTER MATERIALS SUCH AS ALUMINUM
 - UNC RIGHT-HAND THREAD TAP
 - SPIRAL POINT • 2 FLUTE DESIGN
 - H3 THREAD LIMIT • 2-3/8" L X 0.194 SHANK DIAMETER WITH 7/8" THREAD LENGTH

STRAIGHT FLUTE HAND TAPS		MACHINE (GUN) TAPS (HI-SPEED)	
MODEL NO.	SIZE	MODEL NO.	SIZE
1902-6-32	6-32	1904-6-32	6-32
1902-8-32	8-32	1904-8-32	8-32
1902-10-24	10-24	1904-10-24	10-24
1902-10-32	10-32	1904-10-32	10-32
1902-1/4-20	1/4-20	1904-1/4-20	1/4-20

NOTE: Other sizes available on application

DRILL BITS

- REF. D
- HEAVY DUTY DRILLS HAVE A 135° SPLIT POINT AND A NORMAL HELIX FOR GOOD CHIP CLEARANCE. THE RUGGED CONSTRUCTION AFFORDS EFFICIENT DRILLING IN STAINLESS STEEL AND OTHER HARD MATERIALS, AND IN APPLICATIONS WHERE EXCESSIVE BREAKAGE OCCURS WITH GENERAL PURPOSE DRILL BITS. THESE HIGH QUALITY DRILL BITS ARE AVAILABLE IN JOBBER AND STUB LENGTHS.
- HIGH SPEED STEEL CONSTRUCTION FOR DURABILITY - RECOMMENDED FOR TOUGHER FERROUS METALS • NAS 907, TYPE C • AVAILABLE IN SCREW MACHINE/STUB LENGTH AND JOBBER/REGULAR LENGTH • 135-DEGREE SELF-CENTERING SPLIT POINT FOR EASIER PENETRATION • STEAM OXIDE FINISH FOR INCREASED WEAR RESISTANCE AND LUBRICITY • RIGHT HAND TURN

AVAILABLE IN ALL SIZES
DIAMETERS: 1/64" (.39mm) THRU 1/2" (12.7mm)
#1 (5.8mm) THRU #60 (1mm) AND A THROUGH Z LETTER GAUGE
ADD SUFFIX:
'R' FOR JOBBER (REGULAR) LENGTH 'S' FOR STUB SCREW MACHINE LENGTH

TUNGSTEN ELECTRODES

2% THORIATED, GROUND

MODEL NO.	MODEL NO.	MODEL NO.
MK-1600-E	MK-3320-E	MK-1800-E
1/16" DIA. x 7" LG. (2mm x 180mm)	3/32" DIA. x 7" LG. (2mm x 180mm)	1/8" DIA. x 7" LG. (3mm x 180mm)

NOTE: EACH PACKAGE CONTAINS 10 ELECTRODES

Drill Bit Decimal Equivalents - For Fractional, Wire Gauge, Letter & Metric (mm) Size Drills

DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES
0.25	.0098	1.50	.0591	#32	.1160	#6	.2040	8.10	.3189	29/64"	.4531	18.50	.7283
0.30	.0118	#53	.0595	2.95	.1161	5.20	.2047	8.20	.3228	11.60	.4567	47/64"	.7344
#80	.0135	1.55	.0610	3.00	.1181	#5	.2055	P	.3230	11.70	.4606	18.75	.7382
0.35	.0138	1/16"	.0625	#31	.1200	5.30	.2087	8.30	.3268	11.80	.4646	19.00	.7480
#79	.0145	1.60	.0629	3.10	.1220	#4	.2090	-	-	11.90	.4685	3/4"	.7500
1/64"	.0156	#52	.0635	1/8"	.1250	5.40	.2126	21/64"	.3281	15/32"	.4687	19.25	.7579
0.40	.0157	1.65	.0650	3.20	.1260	#3	.2130	8.40	.3307	12.00	.4724	49/64"	.7656
#78	.0160	1.70	.0669	#30	.1285	5.50	.2165	Q	.3320	12.10	.4764	19.50	.7677
0.45	.0177	#51	.0670	3.30	.1299	7/32"	.2187	8.50	.3346	12.20	.4803	19.75	.7776
#77	.0180	1.75	.0689	3.40	.1339	5.60	.2205	8.60	.3386	12.30	.4843	25/32"	.7812
0.50	.0197	#50	.0700	#29	.1360	#2	.2210	R	.3390	31/64"	.4843	20.00	.7874
#76	.0200	1.80	.0709	3.50	.1378	5.70	.2244	8.70	.3425	12.40	.4882	51/64"	.7969
#75	.0210	1.85	.0730	#28-9/64"	.1405	#1	.2280	11/32"	.3437	12.50	.4921	20.25	.7972
0.55	.0217	#49	.0730	3.60	.1417	5.80	.2283	8.80	.3465	12.60	.4961	20.50	.8071
#74	.0225	1.90	.0748	#27	.1440	5.90	.2323	S	.3480	12.70	.5000	13/16"	.8125
0.60	.0236	#48	.0760	3.70	.1457	A	.2340	8.90	.3504	1/2"	.5000	20.75	.8169
#73	.0240	1.95	.0768	#26	.1470	15/64"	.2344	9.00	.3543	12.80	.5039	21.00	.8268
#72	.0250	5/64"	.0781	#25	.1495	6.00	.2362	T	.3580	12.90	.5079	53/64"	.8281
0.65	.0256	#47	.0785	3.80	.1496	B	.2380	9.10	.3583	13.00	.5118	21.25	.8366
#71	.0260	-	-	#24	.1520	6.10	.2401	23/64"	.3594	33/64"	.5156	27/32"	.8437
0.70	.0276	2.00	.0787	3.90	.1535	C	.2420	9.20	.3622	13.20	.5197	21.50	.8465
#70	.0280	2.05	.0807	#23	.1540	6.20	.2441	9.30	.3661	17/32"	.5313	21.75	.8563
#69	.0292	#46	.0810	5/32"	.1562	D	.2460	U	.3680	13.50	.5315	55/64"	.8594
0.75	.0295	#45	.0820	#22	.1570	6.30	.2480	9.40	.3701	13.80	.5433	22.00	.8661
#68	.0310	2.10	.0827	4.00	.1575	E-1/4"	.2500	9.50	.3740	-	-	7/8"	.8750
1/32"	.0313	2.15	.0846	#21	.1590	6.40	.2520	3/8"	.3750	35/64"	.5469	22.25	.8760
0.80	.0315	#44	.0860	#20	.1610	6.50	.2559	V	.3770	14.00	.5512	22.50	.8858
#67	.0320	2.20	.0866	4.10	.1614	F	.2570	9.60	.3780	14.25	.5610	57/64"	.8906
#66	.0330	2.25	.0886	4.20	.1654	6.60	.2598	9.70	.3819	9/16"	.5625	22.75	.8957
0.85	.0335	#43	.0890	#19	.1660	G	.2610	9.80	.3858	14.50	.5709	23.00	.9055
#65	.0350	2.30	.0905	4.30	.1693	6.70	.2638	W	.3860	37/64"	.5781	29/32"	.9062
0.90	.0354	2.35	.0925	#18	.1695	17/64"	.2656	9.90	.3898	14.75	.5807	23.25	.9154
#64	.0360	#42	.0935	11/64"	.1719	H	.2660	25/64"	.3906	15.00	.5906	59/64"	.9219
#63	.0370	3/32"	.0937	#17	.1730	6.80	.2677	10.00	.3937	19/32"	.5937	23.50	.9252
0.95	.0374	2.40	.0945	4.40	.1732	6.90	.2716	X	.3970	15.25	.6004	23.75	.9350
#62	.0380	#41	.0960	#16	.1770	I	.2720	10.10	.3976	39/64"	.6094	15/16"	.9375
#61	.0390	2.45	.0965	4.50	.1771	7.00	.2756	10.20	.4016	15.50	.6102	24.00	.9449
1.00	.0394	#40	.0980	#15	.1800	J	.2770	Y	.4040	15.75	.6201	61/64"	.9531
#60	.0400	2.50	.0984	4.60	.1811	7.10	.2795	10.30	.4055	5/8"	.6250	24.25	.9547
#59	.0410	#39	.0995	-	-	K-9/32"	.2811	13/32"	.4062	16.00	.6299	24.50	.9646
1.05	.0413	2.55	.1004	#14	.1820	7.20	.2835	10.40	.4094	16.25	.6398	31/32"	.9688
#58	.0420	#38	.1015	4.70	.1850	7.30	.2874	Z	.4130	41/64"	.6406	24.75	.9744
#57	.0430	2.60	.1024	#13	.1850	L	.2900	10.50	.4134	16.50	.6496	25.00	.9843
1.10	.0433	#37	.1040	3/16"	.1875	7.40	.2913	10.60	.4173	21/32"	.6562	63/64"	.9844
1.15	.0453	2.65	.1043	4.80	.1890	M	.2950	10.70	.4213	16.75	.6594	1"	1.0000
#56	.0465	2.70	.1063	#12	.1890	7.50	.2953	27/64"	.4219	17.00	.6693		
3/64"	.0469	#36	.1065	#11	.1910	19/64"	.2968	10.80	.4252	43/64"	.6719		
1.20	.0472	2.75	.1083	4.90	.1929	7.60	.2992	10.90	.4291	17.25	.6791		
1.25	.0492	7/64"	.1093	#10	.1935	N	.3020	11.00	.4330	11/16"	.6875		
1.30	.0512	#35	.1100	#9	.1960	7.70	.3031	11.10	.4370	17.50	.6890		
#55	.0520	2.80	.1102	5.00	.1968	7.80	.3071	7/16"	.4375	17.75	.6988		
1.35	.0531	#34	.1110	#8	.1990	7.90	.3110	11.20	.4409	45/64"	.7031		
1.40	.0550	2.85	.1122	5.10	.2008	5/16"	.3125	11.30	.4449	18.00	.7087		
#54	.0550	#33	.1130	#7	.2010	8.00	.3150	11.40	.4488	18.25	.7185		
1.45	.0571	2.90	.1142	13/64"	.2031	O	.3160	11.50	.4528	23/32"	.7187		

DRILL SIZE BASED ON APPROXIMATELY 72% - 77% FULL THREAD

TAP SIZE	PITCH FORM	TAP DRILL SIZE	ALT. TAP DRILL	TAP SIZE	PITCH FORM	TAP DRILL SIZE	ALT. TAP DRILL
UNIFIED TAPS				UNIFIED TAPS (CONT.)			
0	80 (U)NF	3/64"	1.25	1"	8 (U)NC	7/8"	22.25
1	64 (U)NC	53	1.55	1"	12 (U)NF	59/64"	23.25
	72 (U)NF	53	1.55		14 (U)NS	15/16"	23.50
2	56 (U)NC	50	1.85	1-1/8"	7 (U)NC	63/64"	25.00
	64 (U)NF	50	1.90		12 (U)NF	1-3/64"	26.50
3	48 (U)NC	47	2.10	1-1/4"	7 (U)NC	1-7/64"	28.00
	56 (U)NF	45	2.15		12 (U)NF	1-11/64"	29.50
4	40 (U)NC	43	2.35	1-3/8"	6 (U)NC	1-7/32"	30.75
	48 (U)NF	42	2.40		12 (U)NF	1-19/64"	32.75
5	40 (U)NC	38	2.65	1-1/2"	6 (U)NC	1-11/32"	34.00
	44 (U)NF	37	2.70		12 (U)NF	1-27/64"	36.00
6	32 (U)NC	36	2.85	1-3/4"	5 (U)NC	1-9/16"	39.50
	40 (U)NF	33	2.95	2"	4-1/2 (U)NC	1-25/32"	45.00
8	32 (U)NC	29	3.50	TAPER PIPE TAPS NPT			
	36 (U)NF	29	3.50	1/16"	27 NPT	D	6.30
10	24 (U)NC	25	3.90	1/8"	27 NPT	R	8.70
	32 (U)NF	21	4.10	1/4"	18 NPT	7/16"	11.10
12	24 (U)NC	16	4.50	3/8"	18 NPT	37/64"	14.50
	28 (U)NF	14	4.70	1/2"	14 NPT	23/32"	18.00
1/4"	20 (U)NC	7	5.10	3/4"	14 NPT	59/64"	23.25
	28 (U)NF	3	5.50	1"	11-1/2 NPT	1-5/32"	29.00
5/16"	18 (U)NC	F	6.60	1-1/4"	11-1/2 NPT	1-1/2"	38.00
	24 (U)NF	I	6.90	1-1/2"	11-1/2 NPT	1-47/64"	44.00
3/8"	16 (U)NC	5/16"	8.00	2"	11-1/2 NPT	2-7/32"	56.00
	24 (U)NF	Q	8.50	2-1/2"	8 NPT	2-5/8"	67.00
7/16"	14 (U)NC	U	9.40	3"	8 NPT	3-1/4"	82.50
	20 (U)NF	25/64"	9.90	STRAIGHT PIPE TAPS NPS			
1/2"	13 (U)NC	27/64"	10.80	1/8"	27 NPS	S	8.80
	20 (U)NF	29/64"	11.50	1/4"	18 NPS	29/64"	11.50
9/16"	12 (U)NC	31/64"	12.20	3/8"	18 NPS	19/32"	15.00
	18 (U)NF	33/64"	12.90	1/2"	14 NPS	47/64"	18.50
5/8"	11 (U)NC	17/32"	13.50	3/4"	14 NPS	15/16"	23.75
	18 (U)NF	37/64"	14.50	1"	11-1/2 NPS	1-3/16"	30.25
3/4"	10 (U)NC	21/32"	16.50	1-1/4"	11-1/2 NPS	1-33/64"	38.50
	16 (U)NF	11/16"	17.50	1-1/2"	11-1/2 NPS	1-3/4"	44.50
7/8"	9 (U)NC	49/64"	19.50	2"	11-1/2 NPS	2-7/32"	56.00
	14 (U)NF	13/16"	20.40				



TACKY TAPE

- FOR SOUND DEADENING OF WORK TOPS • A HIGHLY ELASTIC GRAY BUTYL TAPE WITH EXCELLENT SURFACE TACK SPECIFICALLY DESIGNED FOR SEALING AND SOUND DAMPENING BETWEEN METAL PANEL JOINTS • SUPERIOR SURFACE TACK ALLOWS IT TO ADHERE TO METAL SUBSTRATES THAT ARE CONTAMINATED WITH LIGHT ROLL FORMING OIL WITHOUT PRE-WIPING THE SURFACE • SERVICE TEMPERATURE RANGE -40°F TO 200°F • WILL RESIST FUNGAL ATTACK AND NOT SUPPORT MILDEW GROWTH • FEDERAL SPECIFICATION TT-C-1796A, TYPE II, CLASS B • USDA ACCEPTABLE • UL APPROVED

MODEL NO. Q85-5225 ONE CASE
(24 ROLLS/CASE)

ROLL SIZE: 3/4" WIDE X 3/32" THICK X 45 FT.
(19mm x 2mm x 14m)



TUFF BRAKE FILM

- DIE MARKS AND SANDING ARE ELIMINATED • DIES ARE PROTECTED • PRODUCTION COSTS DECREASE • SPECIFICALLY DESIGNED TO ELIMINATE PRESS BRAKE WITNESS MARKS CAUSED BY THE LOWER DIE WHEN USED FOR BENDING STAINLESS STEEL, ALUMINUM, SHEET METAL AND PRE PAINTED METALS • REDUCES NEED FOR COSTLY GRINDING AND POLISHING • DURABLE - THE SAME PIECE OF TUFF BRAKE FILM CAN BE USED NUMEROUS TIMES BEFORE YOU NEED TO READJUST THE FILM TO FORM AGAINST FRESH MATERIAL (LONGEVITY WILL VARY DEPENDING ON TYPES OF MATERIAL AND ANGLES PRODUCED)

USED BETWEEN PRESS BRAKE DIE AND FORMED PIECE TO ELIMINATE BRAKE MARKS AND POLISHING. PROTECTS EXPENSIVE DIES AND DECREASES PRODUCTION COSTS. CUT OFF A PIECE OF FILM THE SAME LENGTH AS YOUR BOTTOM DIE. FASTEN EDGE OF THE FILM TO THE DIE USING STRIP MAGNETS, MASKING, DUCT OR DOUBLE FACED TAPE FOR WHICHEVER SURFACE YOU WANT TO PROTECT. LET THE FILM "FLOP" OVER THE DIE, BEGIN FORMING.

MODEL NO. Q80-4000

ROLL SIZE: 4" WIDE X 100' LONG X .015"
(102mm x 30.5m x .4mm)

MODEL NO. Q80-6000

ROLL SIZE: 6" WIDE X 100' LONG X .015"
(152mm x 30.5m x .4mm)

OTHER WIDTHS AVAILABLE UPON APPLICATION



SOUND PADS

- EASY TO APPLY PEEL AND STICK SELF-ADHESIVE GRAY MASTIC MATERIAL • IMMEDIATE ADHESION TO CLEAN SURFACES, SUCH AS STEEL, ALUMINUM, STAINLESS STEEL, GLASS OR FIBER BOARD
- CONTROLS NOISE, DAMPS VIBRATION IN SHEET METAL - IDEAL FOR USE ON SINK BOTTOMS • FLEXIBLE ALUMINUM BACKING FOLLOWS ANY CONTOUR AND MATCHES STAINLESS STEEL FINISH
- SERVICE TEMPERATURE RANGE FROM -20°F TO 250°F

MODEL NO. Q76-1250

SOLD BY 10 PIECE PACK ONLY

PAD SIZE: 3-1/2" X 10" X 1/16" (90mm x 250mm x 2mm)
WGT. 2.8 Oz. (79g)



ROOM FOGGERS

SANIGUARD TOTAL RELEASE FOGGER ENABLES YOU TO SANITIZE ENTIRE ROOMS IN JUST 15 MINUTES WITH THE SAME POWER OF THE CONVENTIONAL SANIGUARD SPRAYS. EACH 8 oz. FOGGER TREATS UP TO 625 sq. ft. IN ONE APPLICATION. THE 3 oz. SANIGUARD FOGGER IS PERFECT FOR DORM ROOMS, HOTELS, CRUISE SHIP CABINS, AIRPLANES AND MORE.

- SANIGUARD SURFACE SPRAY DRIES ON CONTACT - NO WAITING, NO WIPING, NO MESS
 - SAFE FOR FOOD CONTACT SURFACES (NO POTABLE RINSE REQUIRED) AND OTHER NON-POROUS SURFACES INCLUDING ELECTRONICS
- USE IN BATHROOMS, OFFICES, SCHOOLS, DORM ROOMS, HOSPITAL ROOMS AND HOTELS. IDEAL FOR TREATING HARD TO CLEAN HOT SPOTS SUCH AS PHONES, FAXES, SHARED OFFICE EQUIPMENT, LIGHT SWITCHES, FAUCETS, TOILET SEATS, DOOR KNOBS, DRINKING FOUNTAINS, KEYBOARDS AND COMPUTER MOUSE, BREAK ROOM TABLES, ETC.
- 100% SAFE FOR HUMANS AND ANIMALS - NO SKIN, ORAL OR INHALATION TOXICITY

3 oz PORTABLE AND CONVENIENT

REF. A MODEL NO. SG55-1000

8 oz FOR HOME AND BUSINESS USE

REF. B MODEL NO. SG55-2000



COMPONENT
HARDWARE®

EUROPE CATALOG

Your Global Partner for Innovative Solutions

EUROPEAN CATALOG

Items represented in European Catalogue section are for European market and not in inventory in North America.
Contact your CHG representative for further details.

EU230

EUROPEAN TABLE OF CONTENTS

TABLE OF CONTENTS	EU239
INTRODUCTION	EU240-EU243
WORK TABLES	EU244-EU247
PLUMBING COMPONENTS	EU248-EU253
CAFETERIA COMPONENTS	EU254-EU257
CABINET HARDWARE	EU258-EU263
ORIGINAL EQUIPMENT MANUFACTURING	EU264-EU270
• EQUIPMENT LEGS	EU245-EU247
• HINGES	EU267, EU270
CANOPY HOOD	EU271-EU273
INDEX	EU274

SYMBOLS EXPLAINED	
Diameter	∅
Width	↔
Height	↕
Vertical Adjustment	↕↕
Horizontal Adjustment	↔↔
Weight	⚖
Electrical	⦿
Battery	🔋

NOTE: All dimensions are in MM.

EU231



+31 (0)76-596 8699



COMPONENT
HARDWARE

COMPONENT HARDWARE

ABOUT US

- Innovative manufacturer of specialty components and customized solutions since 1981
- Market leader with extensive engineering, global manufacturing and distribution capabilities
- Serving the foodservice, healthcare, hospitality, commercial and institutional markets
- Offering a wide array of commercial plumbing products, kitchen exhaust system components, fabrication hardware and refrigeration hardware
- Providing the industry's best casting, forging, stamping, machining, injection molding, extruding, fabrication and custom sub-assembly solutions

WHY YOU SHOULD CHOOSE US

- **A trusted and valued supply partner**, solving our customers' problems - saving time, money, and giving peace of mind
- **Global Supply Chain** ensures on-time delivery of quality products wherever you may need them to keep your production lines running smoothly and efficiently
- Our meticulous **Quality Assurance team** insures our products meet or exceed all market standards and regulatory requirements
- Ability to **cost-effectively engineer** and build specialty or proprietary component and subassembly solutions on projects of all sizes
- **Global engineering and manufacturing capabilities**, including machining, metal forming, forging, stamping, die and sand casting, plastic injection molding, extruding, fabrication and subassembly operations allow for complete design and customization flexibility
- **Comprehensive product catalog** of over 9,000 items including specialty and customer-proprietary items
- Our **virtual manufacturing model** permits us to own our product designs and tooling without incurring the prohibitive expenses of owning the physical production facilities

WHERE TO FIND US

- The Europe Office and Warehouse is located in Breda, the Netherlands.
- Headquartered in Lakewood, NJ, USA with warehouses and sales offices located throughout the United States, Canada, and Asia
- International distribution network ensures timely delivery of quality products to virtually any location in the world
- Follow us on LinkedIn, Facebook, Instagram and Twitter
- For further information, please visit our web site at: www.componenthardware.com



Breda, Netherlands



Fullerton, Califor-



Dallas, Texas



Markham, On-



Lakewood, New Jersey

Innovative Engineering

Strategic Solutions Provider – our dedicated team supports all your engineering and manufacturing needs from start to finish, whether it is a full concept design or just minor design changes to an existing product. We have the ability to develop unique custom solutions with a full staff of qualified mechanical and electrical engineers and offer comprehensive customer product design support with onsite design and technical assistance. It is our consultative design, reverse engineering capabilities, fast project/quote turnaround, value engineering for cost reduction and numerous patented and trademarked products that keep our customers coming back.

Our team of certified SolidWorks 3-D CAD professionals use 3-D rapid prototype modeling to help get from concept to prototype to production in the shortest time possible at the lowest possible cost.

Global Regulatory Compliance – our engineers work with outside testing agencies to insure your products meet or exceed all regulatory requirements, including NSF, UL, CE, WRAS, NFPA, and RoHS.



Supply Chain Optimization

Strategic Warehousing – we're committed to insuring we have the required high-quality finished parts on our shelves at all times, to take your production to the next level – we make a large investment in inventory, so our customers don't have to.

Over 250,000 sq. ft. of dedicated warehouse space in the U.S., Canada and Europe.


Global Distribution Network – our global network of distributors ensures an uninterrupted supply of products – delivering what you need, when you need it.

International Logistics – our knowledgeable staff will insure the smooth, timely delivery of product wherever your facilities may be located.

Custom Subassemblies

We are a strategic manufacturing partner by simplifying your production processes, so you can concentrate on your core business.

We have the capability to supply complex, subassemblies and complete assemblies. Besides supplying the individual component parts we are traditionally known for, like bearings and drawer slides, we can also help you to design and manufacture complete product assemblies and sub-assemblies to save you additional time and money.

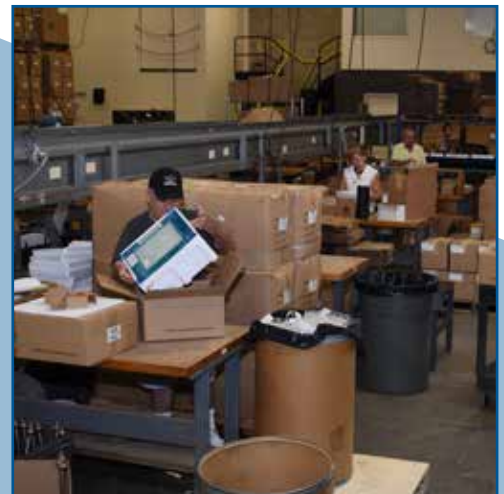

GLOBAL MANUFACTURING CAPABILITIES

Forging

Forging is the oldest metal working process known to man and is the term used for shaping metal by using localized compressive forces. Cold forging is done at room temperature or near room temperature. Hot forging is done at a high temperature, which makes metal easier to shape and less likely to fracture. Warm forging is done at intermediate temperature between room temperature and hot forging temperatures. Forged parts can range in size from 2 oz. to 3 lbs. Forged parts usually require further processing to achieve a finished part. Forging results in metal that is stronger than cast or machined metal parts and can impart a high strength-to-weight ratio.




Die Casting

During the die casting process, engineers inject molten metal into a steel mold, often under intense pressure. The sizes of the machines differ depending on the size of the respective mold. The complete die casting cycle varies depending on the weight and size of the components. Die casting is the fastest way of producing precise, high-quality, nonferrous metal parts.



Sand Casting

Sand casting, also known as sand molded casting, is a metal casting process characterized by using sand as the mold material. The term "sand casting" can also refer to an object produced via the sand casting process. Sand castings are produced in specialized factories called foundries.

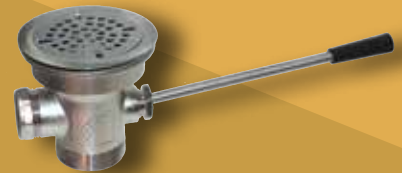


Investment Casting

Investment casting or lost wax casting is a process in manufacturing whereby a refractory ceramic material is used to coat a wax pattern. The geometry of the ceramic material takes the casting shape once it has fully hardened. The wax is melted, discharged from the mold and molten metal and poured into the wax pattern's cavity. Investment casting allows for the production of accurate components repetitively.



Stamping

Stamping features a versatile range of sheet-metal forming manufacturing processes which include punching using a stamping press, bending, embossing or coining. Stamping can be done on sheet metal and some other materials such as polystyrene. A progressive die stamping process is characterized by multiple cutting and forming operations that take place simultaneously. Common materials used for progressive die stamping include various grades of stainless steel and cold rolled commercial steel. Also, tooling is generally less expensive here.

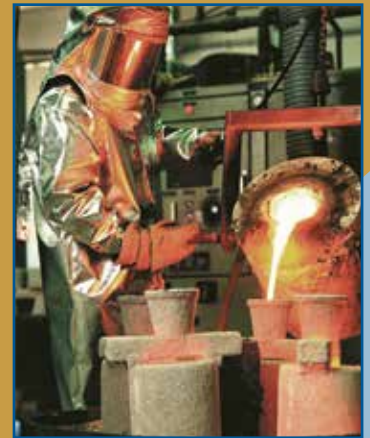



Machining

Our machining operations are categorized into milling, turning, tapping, threading, and drilling. These operations use milling machines to cut workpieces while drilling operations use rotating cutters to produce and refine holes. Threading and tapping are processes that form or cut female and male mating pairs. All these procedures are essential and support our commercial kitchen components manufacturing.



Plastic Injection Molding & Extruding

Plastic injection molding is a process that produces thermosetting and thermoplastic materials. It entails injecting molten plastic into a mold at high pressure, usually the inverse of the shape of the product. Then, molds are created using metal by mold makers or tool makers who use aluminum or steel to form the required features with utmost precision. Commonly used materials are ABS Nylon, polystyrene, polypropylene, PVC, and polyethylene.



Wire Forming

Also referred to as wire forming or fabrication, metal forming involves bending and stamping wires into fabricated forms to create a wide range of items. Common products include wire racks, hooks, specialty pins, springs, clips, and other customized products. Our engineers perform wire forming processes either manually or using CNC machines. Stamping involves placing a stamp sheet metal, in either coil or blank form, into a stamping press. During the procedure, the die surface and a tool form a net-shaped product. Materials commonly used include various grades of stainless steel, commercial steel, and cold-rolled steel.




Plating & Powder Coating

This is a collective name for surface-covering techniques that involve depositing a metal into a conductive surface. Plating prevents corrosion of electronic devices, faucets, and hinges. It influences product attributes such as wear-ability, paint adhesion, shielding, and conductivity. We specialize in zinc plating, electroplating, chrome plating, and nickel plating. Powder coating involves applying a distinctive dry powder coating, which does not need a solvent to keep the filler parts and binder in a liquid form. Engineers apply the powder electrostatically and cure it under heat to form a layer. The finish that it creates to our plumbing component manufacturing is tougher and harder than that of paint.



WORK TABLES

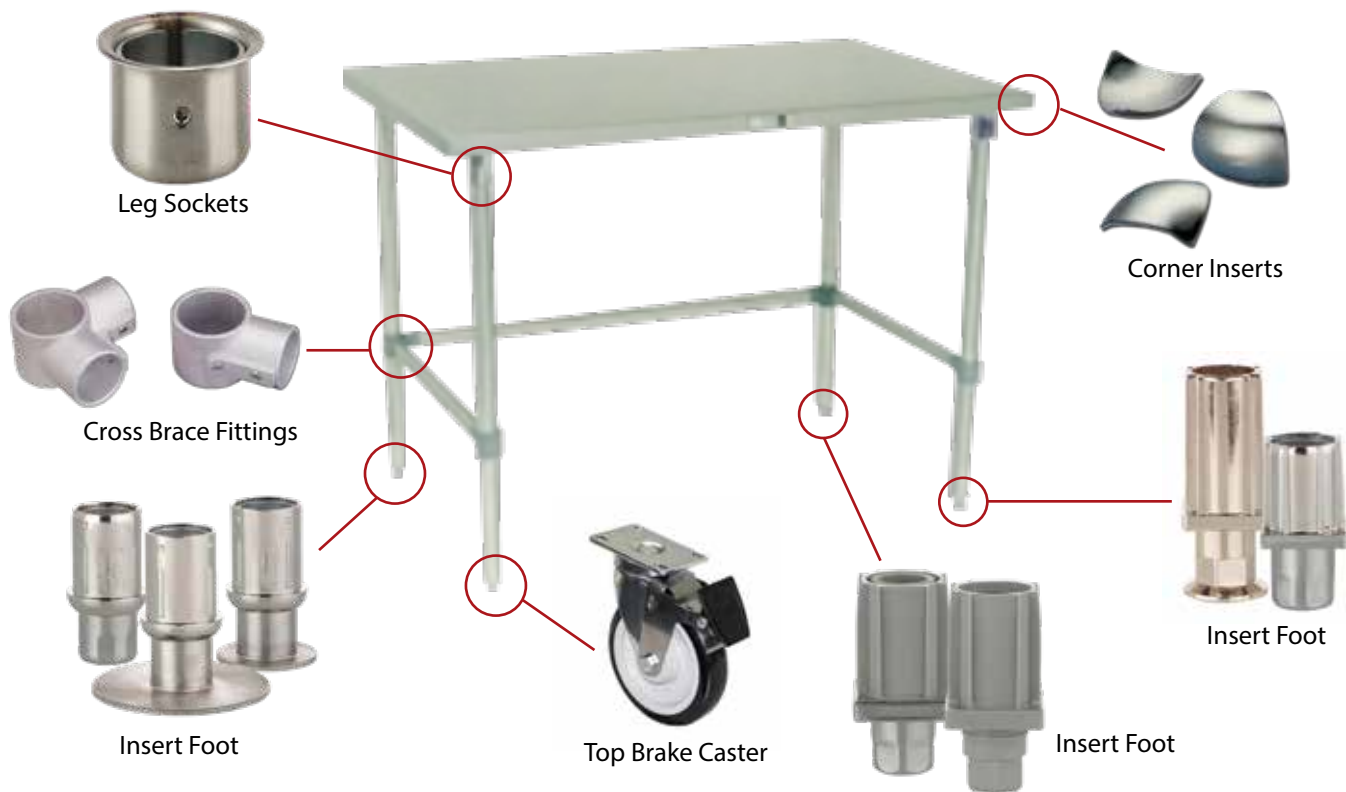

- ✓ INSERT FEET ARE AVAILABLE IN A WIDE VARIETY OF SIZES FOR SQUARE AND ROUND TUBES
- ✓ COME IN A GREAT VARIETY OF FINISHES, PLASTIC, ZAMAK, NICKEL PLATED AND STAINLESS STEEL
- ✓ A SUBSTANTIAL RANGE OF ADJUSTABLE INSERT LEGS
- ✓ NSF CERTIFIED MODELS AVAILABLE
- ✓ AVAILABLE FROM STOCK

- ✓ STELPOTEN VERKRIJGBAAR VOOR MEERDERE AFMETINGEN, VOOR RONDE EN VIERKANTE BUIZEN
- ✓ VERKRIJGBAAR IN VERSCHILLENDE MATERIALEN; PLASTIC, ZAMAK, VERCHROOMD EN RVS
- ✓ EEN UITGEBEIDE RANGE IN HOOGTE VERSTELBARE POOTJES
- ✓ NSF GECERTIFICEERDE MODELLEN VERKRIJGBAAR
- ✓ UIT VOORRAAD LEVERBAAR

- ✓ EINSCHLAGFÜSSE SIND ERHÄLTICH IN VIELEN VERSCHIEDENEN GRÖSSEN, FÜR RUND- UND VIERKANT ROHRE
- ✓ VERFÜGBAR IN UNTERSCHIEDLICHEN MATERIALIEN WIE ZAMAK (ALUMINIUM), KUNSTSTOFF, EDELSTAHL UND VERNICKELT
- ✓ DER WESENTLICHE BEDARF AN EINSCHLAGFÜSSEN WIRD ABGEDECKT
- ✓ NSF ZERTIFIZIERTE MODELLE SIND ERHÄLTICH
- ✓ LAGERWARE, DAHER KURZFRISTIG VERFÜGBAR

EU236

Items shown are for European market only, contact your CHG representative for further details

INP SERIES



INSERT FOOT, PLASTIC

EINSCHLAGFUSS, KUNSTSTOFF

VERINS POUR TUBES CARRÉS

STELPOOT, KUNSTSTOF

*OTHER COLORS AVAILABLE

ITEM	Ø	↔	↕	⌈	⌋	⚙
INP 030 H	30	30	22	32		200
INP 035 H	35	35	32	36		200
INP 035 H-SC	35	35	32	36		200
INP 040 H	40	40	32	36		200
INP 040 H-SC	40	40	32	36		200
INP 070 H-B	70	70	153	54		450
INP 070 H-G	70	70	153	54		450
INP 424H-BLK	45	45	94	53		450

IN - H SERIES



INSERT FOOT, ZAMAK, NICKEL PLATED, TUBE THICKNESS 1.2 TO 1.5MM

EINSCHLAGFUSS, VERZINKT, ZAMAK, WANDSTÄRKE 1.2 TO 1.5MM

VERINS POUR TUBES CARRÉS, GALVANISÉS, CHROMÉS, POUR ÉPAISSEUR DE TUBE DE 1.2 À 1.5 MM

STELPOOT, VERZINKT, VERNIKKELD, WAND DIKTE 1.2 TO 1.5MM

ITEM	Ø	↔	↕	⌈	⌋	⚙
IN 025	25	25	20	30		200
IN 025-NP	25	25	20	30		200
IN 030 H	30	30	30	30		300
IN 030 H-NP	30	30	30	30		300
IN 035 H	35	35	25	30		450
IN 035 H-NP	35	35	25	30		450
IN 040 H	40	40	35	30		450
IN 040 H-2 (2MM)	40	40	35	30		450

IN - F SERIES



INSERT FOOT WITH FLANGE , ZAMAK, NICKEL PLATED

EINSCHLAGFUSS MIT FLANSCH, VERZINKT, ZAMAK

VERINS POUR TUBES CARRÉS, GALVANISÉS

STELPOOT MET FLENS, VERZINKT, VERNIKKELD

ITEM	Ø	↔	↕	⌈	⌋	⚙
IN 030 F	30	30	20	30		300
IN 030 F-NP	30	30	20	30		300
IN 035 F	35	35	20	30		450
IN 030 F-SP30	30	30	20	32		300
IN 030 F-SP50	30	30	20	50		300
IN 040 F	40	40	31	31		450
IN 035 F-NP	35	35	20	20		450
IN 040 F-NP	40	40	31	31		450

IN - HSS SERIES



INSERT FOOT, NICKEL PLATED, STAINLESS STEEL

EINSCHLAGFUSS, VERNICKELT, EDELSTAHL

VERINS POUR TUBES, GALVANISÉS, INOX

STELPOOT, VERNIKKELD, RVS

ITEM	Ø	↔	↕	⌈	⌋	⚙
IN 035 H-SS	35	35	25	30		450
IN 040 H-SS	40	40	35	30		450
IN 040 H-SS-2	40	40	35	30		450

Items shown are for European market only, contact your CHG representative for further details

EU237



+31 (0)76-596 8699



COMPONENT
HARDWARE

WORK TABLES

IN & INR SERIES



INSERT FOOT, SQUARE OR ROUND, ZAMAK WITH OR WITHOUT FLANGE, NICKEL PLATED OR S/S

STELLFUSS, 4-ECKIG ODER RUND, ZAMAK, MIT ODER OHNE FLANGE, NICKEL ODER EDELSTAHL

VERINS CARRÉ OU ROND, ZAMAK NICKELÉ, EMBOUT INOX AVEC OU SANS FLANGE

STELPOOT, VIERKANT OF ROND, ZAMAK MET EN ZONDER

FLENS, VERNIKKELD OF RVS

ITEM	SQUARE, 4-ECKIG, CARRÉ, VIERKANT					
	Ø	↔	↕	⌈	⌋	⌘
IN 040 F-SS		40	40	30		450
IN 040 F-SS50		40	40	30		450
	ROUND, RUND, ROND, ROND					
INR 040 F-SS	40		40	30		450
INR 040 F-SS50	40		40	30		450
INR 040 H-NP	40		35	35		450
INR 040 H-SS	40		35	35		450

A59 SERIES



EQUIPMENT LEG, STAINLESS STEEL, M10

ANSCHRAUBFUSS, EDELSTAHL, M10

PIED RÉGLABLE, INOX, M10

STELPOOT, RVS, M10

*MOUNTING PLATE

NOTE: OTHER CONFIGURATIONS AVAILABLE ON REQUEST

ITEM	Ø	↕	⌈	⌋	⌘
A59-1000*	59	120/150	30		700
A59-1100*	59	120/180	60		700
A59-1150	59	120/150	60		700
A59-1250	59	120/180	30		700
A59-0090	59	100/160	60		700
A59-1150-55	59	120/180	60		700
A59-1650	59	160/255	95		700

A65 SERIES



EQUIPMENT LEG, STAINLESS STEEL, M10

ANSCHRAUBFUSS, EDELSTAHL, M10

PIED RÉGLABLE, INOX, M10

STELPOOT, RVS, M10

*MOUNTING PLATE

NOTE: OTHER CONFIGURATIONS AVAILABLE ON REQUEST

ITEM	Ø	↕	⌈	⌋	⌘
A65-2000	65	120/150	30		700
A65-2100	65	120/180	60		700
A65-2200	65	120/150	30		700
A65-2300	65	120/180	60		700
A65-2000-IT*	65	120/150	30		700
A65-2400*	65	155/205	50		700
A65-2600-IT*	65	140/240	100		700
A65-2700*	65	155/205	50		700

CUSTOM LEGS



CUSTOM LEGS AVAILABLE ON REQUEST IN ANY CONFIGURATION REQUIRED

MASSGESCHNEIDERT ANSCHRAUBFÜSSE AUF ANFRAGE IN JEDER ERFORDERLICHEN KONFIGURATION VERFÜGBAR

TAILLEUR SPÉCIFIQUE PIED RÉGLABLE DISPONIBLE SUR DEMANDE DANS TOUTE CONFIGURATION REQUISE

STELPOTEN IN IEDERE SPECIFIEKE CONFIGURATIE OP AANVRAAG VERKRIJGBAAR

Contact us with your request

INA 030, 040 SERIES



INSERT FOOT, ALUMINIUM

EINSCHLAGFUSS, ALUMINIUM

VERINS POUR TUBES CARRÉS ALUMINIUM

STELPOOT, ALUMINIUM

ITEM	SQUARE, 4-ECKIG, CARRÉ, VIERKANT					
	Ø	↔	↕	⌞	⌟	
INA 030 F	30	30	22	33		300
INA 030 H	30	30	17	33		300
INA 040 F	40	40	28,5	31,5		450
INA 040 H	40	40	31	31		450

A48, 50 SERIES



EQUIPMENT LEG, STAINLESS STEEL , M12

ANSCHRAUBFUSS, EDELSTAHL , M12

PIED RÉGLABLE, INOX , M12

STELPOOT, RVS, M12

*ALL A48, 50 MODELS CAN BE PLATED MOUNTED BY FITTING THE MP1/SS ON TOP.

ITEM	Ø	↔	↕	⌞	⌟	
A48-5032-M	41		100	44		900
A48-5048-M	41		150	44		900
A50-5032-M	41	STUD	100	44		900
A50-5048-M	41	STUD	150	44		900
MP1/SS*		102 x 80				

A84, 86 SERIES



EQUIPMENT LEG, STAINLESS STEEL , M12

ANSCHRAUBFUSS, EDELSTAHL , M12

PIED RÉGLABLE, INOX , M12

STELPOOT, RVS, M12

*ALL A84, 86 MODELS CAN BE PLATED MOUNTED BY FITTING THE MP1/SS ON TOP.

ITEM	Ø	↔	↕	⌞	⌟	
A84-5032-M	50		100	44		900
A84-5048-M	50		150	44		900
A86-5032-M	50	STUD	100	44		900
A86-5048-M	50	STUD	150	44		900
MP1/SS*		102 x 80				

CASTERS



CASTERS FOR YOUR APPLICATION, WIDE RANGE AVAILABLE BRAKED AND UNBRAKED, SWIVEL OR FIXED, PLATE OR (EXPANDING) STEM

ROLLEN FÜR IHRE ANWENDUNG, GROSSE AUSWAHL VERFÜGBAR.
GEBREMST UND UNGEBREMST, DREHBAR ODER FESTSTEHEND, PLATTE ODER (SPREIZ-) VORBAU

ROUES POUR VOTRE APPLICATION, LARGE GAMME DISPONIBLE.
FREINÉS ET NON FREINÉS, PIVOTANTS OU FIXES, À TÔLE OU À TIGE (EXPANSIBLE)

WIELEN VOOR UW TOEPASSING, BREED ASSORTIMENT BESCHIKBAAR. GEREMD EN ONGEREMD, DRAAIBAAR OF VAST, PLAAT OF (UITZETTENDE) STEEL

Items shown are for European market only, contact your CHG representative for further details

EU239




+31 (0)76-596 8699



**COMPONENT
HARDWARE**

PLUMBING COMPONENTS

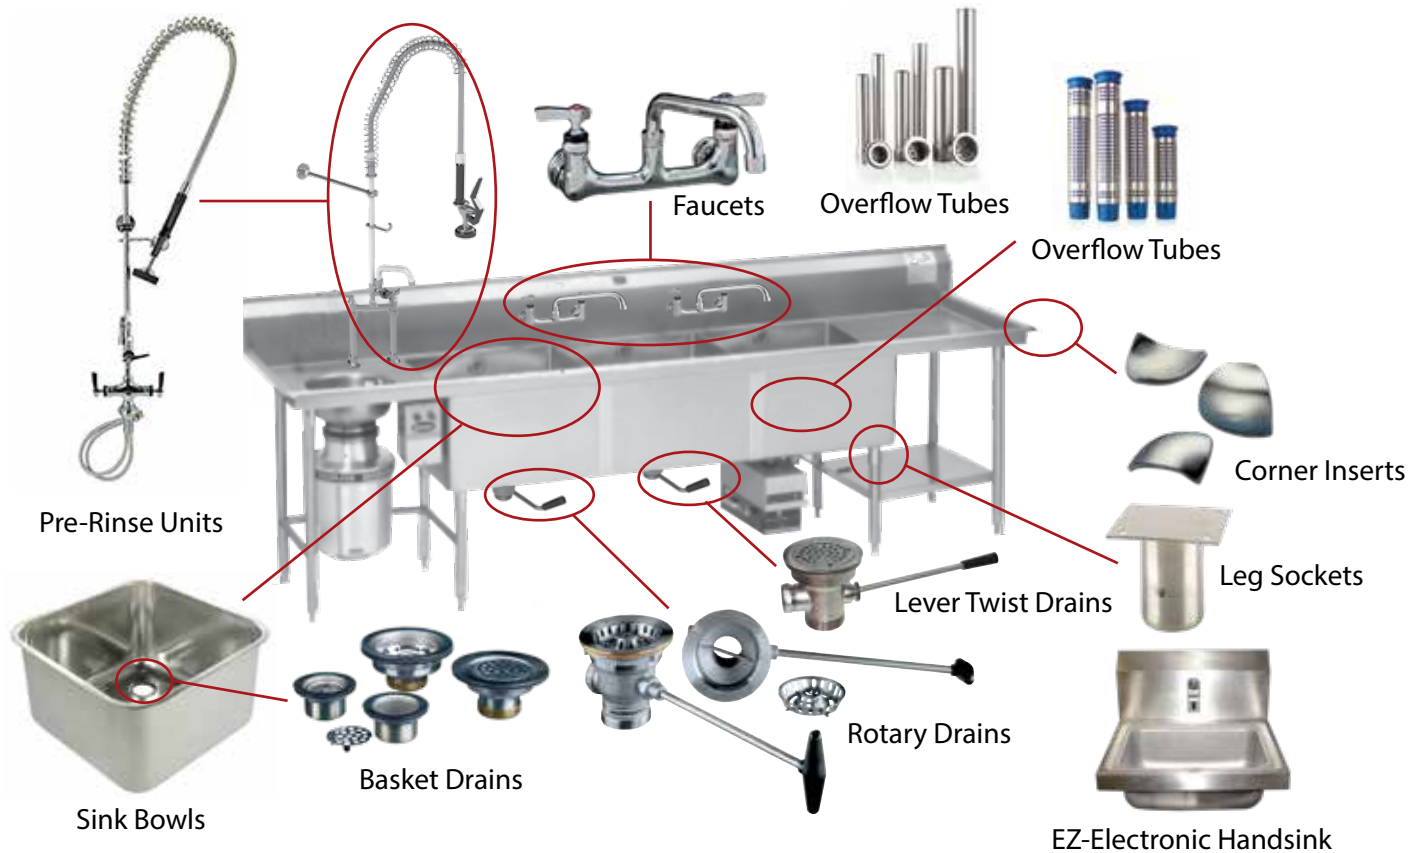

- ✓ ALL FAUCETS AND PRE-RINSES ARE CERTIFIED BY NSF
- ✓ FAUCETS AND PRE-RINSES ARE INDIVIDUALLY PRESSURE TESTED TO 400 PSI
- ✓ ALL FAUCETS AND PRE-RINSES ARE MANUFACTURED IN SOLID BRASS AND ARE MULTIPLE CHROME PLATED
- ✓ PRE-RINSES COME WITH A NYLON-REINFORCED SANTOPRENE® INNER HOSE FOR MAXIMUM DURABILITY
- ✓ IMMEDIATE SHIPMENT FROM STOCK IS ASSURED

- ✓ ALLE KRANEN EN VOORSPOELDOUCHES ZIJN GECERTIFICEERD VOLGENS NSF
- ✓ ELKE KRAAN EN VOORSPOELDOUCHE ONDERGAAT STANDAARD EEN DRUKTEST TOT 400 PSI
- ✓ ALL KRANEN EN VOORSPOELDOUCHES WORDEN GEFABRICEERD UIT MASSIEF BRONS EN MEERVOUDIG VERCHROOMD
- ✓ DE VOORSPOELDOUCHES HEBBEN EEN NYLON VERSTERKTE SANTOPRENE BINNENSLANG VOOR MAXIMALE LEVENSDUUR
- ✓ LEVERING UIT VOORRAAD GEGARANDEERD

- ✓ ALLE ARMATUREN UND GESCHIRRWASCHBRAUSEN SIND NSF ZERTIFIZIERT
- ✓ ALLE ARMATUREN UND GESCHIRRWASCHBRAUSEN SIND DRUCKGEPRÜFT BIS 400PSI
- ✓ ALLE ARMATUREN UND GESCHIRRWASCHBRAUSEN SIND AUS MASSIVEM MESSING GEFERTIGT UND MEHRFACH VERCHROMT
- ✓ GESCHIRRWASCHBRAUSEN SIND MIT NYLON VERSTÄRKTEM SCHLAUCH AUS SANTOPRENE AUSGESTATTET, DAS GARANT- IERT MAXIMALE LEBENSDAUER
- ✓ SCHNELLE LIEFERUNG AUS LAGERVORRAT IST GEWÄHRLEISTET

EU240

Items shown are for European market only, contact your CHG representative for further details

KL50, 56, 60, 66 SERIES		ITEM	Ø	↔	↕	↙	↘	↗
	ENCORE, DECK MOUNT PRE-RINSE UNIT, WITH AND WITHOUT ADD ON FAUCET, 10 MM WATER CONNECTIONS	KL50-1100-BS	38	380	1009			
		KL50-1155-BS10	38	380	1009			
	ENCORE GESCHIRRPÜLBRAUSE MIT UND OHNE SCHWENKAUSLAUF, 10 MM WASSERANSCHLUSS							
	ENCORE DOUCHETTES DE PRÉLAVAGE, MONO-TROU, MONTAGE SUR TABLE, SANS ET AVEC ROBINET INTERMÉDIAIRE, 10 MM CONNECTION	KL50-MINI-EU		242	716			
		KL55-7008		203	219			
		KL55-7010		254	230			
	ENCORE VOORSPOELDOUCHE, ENKELGAT, TAFELMODEL, 10 MM WATER AANSLUITINGEN	KL55-7012		305	242			

KL53 SERIES		ITEM	Ø	↔	↕	↙	↘	↗
	ENCORE WALL MOUNT DOUBLE HOLE PRE-RINSE UNIT WITH AND WITHOUT ADD ON FAUCET	KL53-1000-BS		448	902		200	
		KL53-1020-BS		468	902		150	
	ENCORE GESCHIRRWASSCHBRAUSE DOPPELLOCH WANDMODEL, MIT UND OHNE SCHWENKAUSLAUF	KL53-1000-AF3MK		448	1009			
	ENCORE DOUCHETTES DE PRÉLAVAGE, BI-TROU, FIXATION MURALE, SANS ET AVEC ROBINET INTERMÉDIAIRE	KL55-7008		203	219			
		KL55-7010		254	230			
	ENCORE, VOORSPOELDOUCHE DUBBELGATS WANDMODEL, MET EN ZONDER TUSSENKRAAN	KL55-7012		305	242			

TOP-LINE SERIES		ITEM	Ø	↔	↕	↙	↘	↗
	TOP-LINE, DECK MOUNT PRE-RINSE UNIT, WITHOUT ADD ON FAUCET, 10 MM WATER CONNECTIONS	TLL50-1100-AF3		380	1076			
		TLL50-1100-BR		380	1076			
	TOP-LINE GESCHIRRPÜLBRAUSE OHNE SCHWENKAUSLAUF, 10 MM WASSERANSCHLUSS							
	TOP-LINE DOUCHETTES DE PRÉLAVAGE, MONO-TROU MONTAGE SUR TABLE, SANS ROBINET INTERMÉDIAIRE, 10 MM CONNECTION							
	TOP-LINE VOORSPOELDOUCHE, ENKELGAT, TAFELMODEL, 10 MM							

KL51 SERIES		ITEM	Ø	↔	↕	↙	↘	↗
	ENCORE, DOUBLE PANTRY FAUCET, WITH SWIVEL AND DOUBLE JOINTED SPOUTS	KL51-9106	38	152	211			
		KL51-9108	38	203	224			
	ENCORE DOPPELMISCHARMATURE MIT SCHWENKBAREM AUSLAUF	KL51-9110	38	254	235			
		KL51-9112	38	305	246			
	ENCORE ROBINET PROFESSIONEL, MONO-TROU POUR TABLE, ROTATION COMPLÈTE AVEC COL DE CYGNE	KL51-9114	38	356	257			
		KL51-9116	38	406	268			
	ENCORE PROFESSIONELE KRAAN, ENKELGAT, TAFELMODEL, ZWENKBARE UITLOOP, 10 MM WATER AANSLUITING	KL51-9118	38	457	255			

PLUMBING COMPONENTS

K77 SERIES



ENCORE 8" SERVICE SINK FAUCET 63MM SPOUT, WITH OPTIONAL (SS) VACUUM BREAKER

ENCORE 8" SERVICE SPÜLE-WASSERHAHN 63MM AUSLAUF MIT OPTIONALEM (EDELSTAHL) VAKUUM-UNTERBRECHER

ENCORE 8" ROBINET DE SERVICE, 63MM COL DE CYGNE, AVEC (SS) CLAPET CASSE-VIDE EN OPTION

ENCORE 8" SERVICE KRAAN, 63MM UITLOOP MET OPTIONELE (RVS) VACUUM BREAKER

ITEM	Ø	↔	↕	↕	↕	↕
K77-8102-SD		130	98	VACUUM BREAKER SS		
K77-8102		130	98	VACUUM BREAKER		
K77-8002		130	98	NO VACUUM BREAKER		

SERVICE PARTS



ENCORE SERVICE PARTS, COMPRESSION VALVES, SPRAY ASSEMBLY, BUTTON VALVE, HOSE AND GRIP.

ENCORE-SERVICETEILE, KOMPRESSIONSVENTILE, VORSPÜL-SPRAY, KNOPFVENTIL, SCHLAUCH UND GRIFF

ENCORE PIÈCES DE RECHANGE, VANNES DE COMPRESSION, ENSEMBLE DE PULVÉRISATION DE PRÉRINÇAGE, VANNE À BOUTON, TUYAU ET POIGNÉE

ENCORE SERVICE-ONDERDELEN, COMPRESSIEKLEPPEN, VOOR-SPOELS-SPRAY, KNOPVENTIEL, SLANG EN GREEP

ITEM	Ø	↔	↕	↕	↕	↕
KL50-Y006				COMPRESSION VALVE COLD		
KL50-Y007				COMPRESSION VALVE HOT		
KL50-Y002-16Z				PRE-RINSE SPRAY ASSEMBLY		
KL50-Y004-44Z				FLEXIBLE S/S HOSE 44" WITH GRIP		
KN50-X025-Z				GRIP		
KL50-Y027-Z				BUTTON VALVE		
KS11-12-X010		245		SPOUT		

QUIK-FIL SERIES



ENCORE QUIK-FIL WALL MOUNT / PILLAR FAUCET WITH SWING SPOUT

ENCORE QUIK-FIL WAND MONTAGE / SOCKEL DOPPELMIS-CHARMATUR MIT SCHWENKBAREM AUSLAUF

ENCORE QUIK-FIL ROBINET PROFESSIONEL, BI-TRou FIXATION MURALE / COLONNE, ROTATION COMPLÈTE AVEC COL DE CYGNE

ENCORE QUIK-FIL PROFESSIONELE KRAAN, WANDMONTAGE / PILAAR DUBBELGATS VERSTELBAAR, ZWENKBARE UITLOOP

ITEM	Ø	↔	↕	↕	↕	↕
KL34-3012-SE2		508	696			
KL34-8014		355	235			
KL34-Y006				QUIK-FIL VALVE COLD		
KL34-Y007				QUIK-FIL VALVE HOT		
KL34-Y014				QUIK-FIL SPOUT 14"		

KL56/60/66 SERIES



ENCORE DECK MOUNT ELEVATED BRIDGE DOUBLE HOLE PRE-RINSE UNIT WITH AND WITHOUT ADD ON FAUCET

ENCORE GESCHIRRWASSCHBRAUSE DOPPELLOCH DECK MONTIERT ERHÖHTE BRÜCKE, MIT UND OHNE SCHWENKAUSLAUF

ENCORE DOUCHETTES DE PRÉLAVAGE, BI-TRou, PONT SURÉLEVÉ, MONTÉ SUR LE PONT, AVEC ET SANS ROBINET INTERMÉDIAIRE

ENCORE, VOORSPOELDOUCHE DUBBELGATS BLAD MODEL, VERHOOGDE BRUG, MET EN ZONDER TUSSENKRAAN

ITEM	Ø	↔	↕	↕	↕	↕
KL56-1000-BS		102	978			
KL60-1000-BS		203	978			
KL66-1000-BS		152	978			
KL55-7008		203	219			
KL55-7010		254	230			
KL55-7012		305	242			
KL60-Y200			200			
TLL60-Y200			200			

EU242

Items shown are for European market only, contact your CHG representative for further details

PLUMBING COMPONENTS

KL54 SERIES		ITEM	Ø	↔	↕	↗	↘	↻
		ENCORE, WALL MOUNT FAUCET WITH SWING SPOUT	KL54-8006		152	141		
		ENCORE WAND MONTAGE DOPPELMISCHARMATUR MIT SCHWENKBAREM AUSLAUF	KL54-8008		203	154		
		ENCORE ROBINET PROFESSIONEL, BI-TROU FIXATION MURALE, ROTATION COMPLÈTE AVEC COL DE CYGNE	KL54-8010		254	165		
			KL54-8012		305	176		
			KL54-8014		356	187		
		ENCORE PROFESSIONELE KRAAN, DUBBELGATS VERSTELBAAR, ZWENKBARE UITLOOP	KL54-8016		406	200		

KL61 SERIES		ITEM	Ø	↔	↕	↗	↘	↻
		ENCORE 8" DOUBLE DECK MOUNT FAUCET WITH SWIVEL SPOUT	KL61-8010		254	108		
		ENCORE 8" DOPPELMISCHARMATUR MIET SCHWENKBAREN AUSLAUF	KL61-8012		305	120		
		ENCORE 8" ROBINET PROFESSIONEL, BI-TROU POUR TABLE, ROTATION COMPLÈTE AVEC COL DE CYGNE	KL61-8014		356	131		
			KL61-8016		406	143		
			KL61-8018		457	160		
		ENCORE 8" PROFESSIONELE KRAAN, DUBBELGATS VERSTELBAAR, TAFELMODEL, ZWENKBARE RECHTE UITLOOP						

THE ULTIMATE TOUCH FREE HANDWASH SOLUTION		ITEM						
		INDUSTRY FIRST – 750,000 CYCLE BATTERY LIFE (375,000 HAND WASHES)	KE24-B031-CA0					
		ENERGY-EFFICIENT "LATCHING" (BI-STABLE) SOLENOID ONLY USES POWER TO OPEN OR CLOSE	KE24-B131-CA0					
		AUTO-RANGING FEATURE AUTOMATICALLY ADJUSTS SENSING RANGE	KE24-B031-CB0					
		ARMORED/VANDAL-RESISTANT DC INPUT POWER CABLE	KE24-B131-CB0					
		(2) 18" BRAIDED STAINLESS STEEL SUPPLY LINES INCLUDED	KE25-B031-CA0					
		DC MODELS POWERED WITH (4) 1.5V AA BATTERIES (INCLUDED)	KE25-B131-CA0					
		INFRARED SENSOR ACTIVATED	KE25-B031-CB0					
		SELF-ADAPTING SENSOR DISTANCE ADJUSTMENT	KE25-B131-CB0					
		1 SECOND SHUT-OFF DELAY						
		20 SECOND ADJUSTABLE AUTOMATIC TIME-OUT FEATURE (COMPLIES WITH FDA FOOD CODE)						

KHR SERIES		ITEM	Ø	↔	↕	↗	↘	↻
		HOSE REELS, GRAY POWDER COATED (A) AND STAINLESS STEEL (B)						
		SCHLAUCHAUFROLLER, GRAU PULVERBESCHICHTET UND EDELSTAHL	KHR-5635-O	368	349			
			KHR-5635-OSS	368	349			
		DÉVIDOIR MURAL, COUCHE DE PEINTURE EN POUDRE OU EN INOX	KHR-5635-E	470	381			
		SLANGHASPELS, GECOAT (A) EN RVS (B)	KHR-5635-ESS	470	381			

Items shown are for European market only, contact your CHG representative for further details

EU243



+31 (0)76-596 8699



**COMPONENT
HARDWARE**

PLUMBING COMPONENTS

K27-1000




WATER STATION FILLER, CHROME PLATED, STAINLESS STEEL

WASSERSTATION GLASFÜLLER, VERCHROMT EDELSTAHL

STATION D'EAU AVEC ROBINET COLONNE, INOX

WATERSTATION GLASVULLER, VERCHROMD RVS



ITEM	Ø	↔	↕	⌈⌋	⌈⌋	⌈⌋
K27-1000		356	305	248		
K27-Y001		SINK WITH GRID				
K26-5000		GLASS FILLER				
K26-0010-Z		REPAIR KIT				

K30-1010




DIPPERWEL ASSEMBLY WITH FAUCET, STAINLESS STEEL

PORTIONIERERSPÜLE MIT AUSLAUFHAHN, EDELSTAHL

RINCE DOSEUR AVEC ROBINET, INOX

IJSLEPELBAK MET KRAAN, RVS



ITEM	Ø	↔	↕	⌈⌋	⌈⌋	⌈⌋
K30-1010		180	166			
K30-1000		WITHOUT FAUCET				
K30-Y001		INNER SHELL				
K30-Y002		OUTER SHELL				
KL22-3100-Z		DIPPERWELL FAUCET				

D50 SERIES



TWIST HANDLE WASTE OUTLET WITH FLAT STRAINER

ABLAUFVENTIL SPUHLBECKEN MIT GEBOGENEM HEBEL MIT FLACHEM SIEB

EVACUATION D'EVIER AVEC LEVIER ROTATIVE

AFVOER SPOELBAK MET GEBOGEN DRAAIHENDEL MET VLAKKE ZEEF

ALL MODELS AVAILABLE WITH LEVER HANDLE

ALL MODELS WITH 76MM SINK OPENING AVAILABLE WITH

ITEM	Ø	↔	OVERFLOW OUTLET	OVERFLOW ASSY
D50-4161 (1-1/2" NPS)	76	101		
D50-7100 (1-1/2" NPS)	89	114		
D50-4151 (1-1/2" NPS)	76	101	YES	
D50-7110 (1-1/2" NPS)	89	114	YES	
D50-4591 (1-1/2" NPS)	76	101		YES
D50-7115 (1-1/2" NPS)	89	114		YES
D50-4160 (2" NPS)	76	101		
D50-7200 (2" NPS)	89	114		
D50-4150 (2" NPS)	76	101	YES	
D50-7210 (2" NPS)	89	114	YES	
D50-4590 (2" NPS)	76	101		YES
D50-7215 (2" NPS)	89	114		YES

D53 SERIES



TWIST HANDLE WASTE OUTLET WITH CRUMB CUP

ABLAUFVENTIL SPUHLBECKEN MIT GEBOGENEM HEBEL MIT TOPSIEB

EVACUATION D'EVIER AVEC LEVIER ROTATIVE

AFVOER SPOELBAK MET GEBOGEN DRAAIHENDEL MET ZEEF

ALL MODELS AVAILABLE WITH LEVER HANDLE

ITEM	Ø	↔	OVERFLOW OUTLET	OVERFLOW ASSY
D53-7100 (1-1/2" NPS)	89	114		
D53-7200 (2" NPS)	89	114		
D53-7110 (1-1/2" NPS)	89	114	YES	
D53-7210 (2" NPS)	89	114	YES	
D53-7115 (1-1/2" NPS)	89	114		YES
D53-7215 (2" NPS)	89	114		YES

E13 & E18 SERIES



OVERFLOW TUBE, STAINLESS STEEL

STANDROHR, EDELSTAHL

TROP-PLEINS, INOX

STANDPIJP, RVS

ITEM	Ø	↔	↕	↴	↵	↶
E13-1240 (1-1/4")	31		240			
E18-1250 (1-1/4")	31		DRAIN			
E13-0242 (1-1/2")	38		254			
E13-0244 (1-1/2")	38		305			
E13-0245 (1-1/2")	38		125			
E13-0246 (1-1/2")	38		170			
E13-0247 (1-1/2")	38		200			
E13-0248 (1-1/2")	38		220			
E13-0250 (1-1/2")	38		270			
E18-1500/4 (1-1/2")	38		DRAIN			
E13-2130 (2")	50		130			
E13-2150 (2")	50		170			
E13-2200 (2")	50		200			
E13-2250 (2")	50		250			
E13-2300 (2")	50		300			
E13-2350 (2")	50		350			
E18-2000 (2")	50		DRAIN			

SS SERIES



OVERFLOW TUBE, STAINLESS STEEL

SIEBSTANDROHRE, EDELSTAHL

TROP-PLEINS, INOX

STANDPIJPEN, RVS

ITEM	Ø	↔	↕	↴	↵	↶
SS 08	38		155			
SS 10	38		205			
SS 12	38		255			
SS 14	38		305			
E18-1500/4 (1-1/2")	38		DRAIN			

SBM SERIES




SINK BOWLS, STAINLESS STEEL

WASCHBECKEN, EDELSTAHL

ÉVIERS, INOX

SPOELBAKKEN, RVS



ITEM	Ø	↔	↕	↴	↵	↶
SBM-404020-TF	400	400	200			
SBM-404025-TF	400	400	250			
SBM-404030-TF	400	400	300			
SBM-504025-TFL	500	400	250			
SBM-504025-TFR	500	400	250			
SBM-504030-TFL	500	400	300			
SBM-504030-TFR	500	400	300			
SBM-505025-TF	500	500	250			
SBM-505030-TF	500	500	300			
SBM-604530-TFL	600	450	300			
SBM-604530-TFR	600	450	300			
SBM-605030-TFL	600	500	300			
SBM-605030-TFR	600	500	300			

Items shown are for European market only, contact your CHG representative for further details

EU245



+31 (0)76-596 8699



COMPONENT
HARDWARE

CAFETERIA COMPONENTS



- ✓ A VERY EXTENSIVE RANGE OF COMPONENTS TO ALLOW OUR CUSTOMERS TO DO ONE-STOP SHOPPING
- ✓ HEAVY DUTY STAINLESS STEEL SHELF BRACKETS AVAILABLE IN VARIOUS SIZES AND MODELS
- ✓ GLASS CLAMPS FOR ROUND AND SQUARE TUBING FOR 6 AND 8MM GLASS
- ✓ LED FIXTURES UTILIZE LONG-LASTING, ENERGY EFFICIENT LED LAMPS

- ✓ EEN ZEER UITGEBREIDE RANGE COMPONENTEN DIE 'ONE-STOP SHOPPING' MOGELIJK MAAKT
- ✓ HEAVY DUTY RVS DRAGERS VERKRIJGBAAR IN MEERDERE MODELLEN EN AFMETINGEN
- ✓ GLASHOUDERS VOOR ZOWEL RONDE ALS VIERKANTE BUIZEN VOOR 6 EN 8 MM GLAS
- ✓ LED ARMATUREN MAKEN GEBRUIK VAN DUURZAME, ENERGIEZUINIGE LED LAMPEN

- ✓ EINE SEHR GROSSE AUSWAHL VON KOMPONENTEN, DIE ES UNSEREN KUNDEN MÖGLICH MACHT ALLES AUS EINER HAND ZU ERHALTEN (ONE-STOP SHOPPING)

- ✓ SCHWERLAST (KLAPP)-KONSOLEN AUS EDELSTAHL, ERHÄLTICH IN VERSCHIEDENEN GRÖSSEN UND MODELLEN
- ✓ GLASHALTER AUS EDELSTAHL FÜR RUND UND VIERKANTROHR FÜR 6 UND 8MM GLAS, AUCH IN V4A LIEFERBAR
- ✓ LED LAMPEN FÜR LANGLEBIGEN UND ENERGIESPARENDEN EINSATZ

EU246

Items shown are for European market only, contact your CHG representative for further details

CAFETERIA COMPONENTS

CASTERS



CASTERS FOR YOUR APPLICATION, WIDE RANGE AVAILABLE
BRAKED AND UNBRAKED, SWIVEL OR FIXED, PLATE OR
(EXPANDING) STEM

ROLLEN FÜR IHRE ANWENDUNG, GROSSE AUSWAHL VERFÜGBAR.
GEBREMST UND UNGEBREMST, DREHBAR ODER FESTSTEHEND,
PLATTE ODER (SPREIZ-) VORBAU

ROUES POUR VOTRE APPLICATION, LARGE GAMME DISPONIBLE.
FREINÉS ET NON FREINÉS, PIVOTANTS OU FIXES, À TÔLE OU À TIGE
(EXPANSIBLE)

WIELEN VOOR UW TOEPASSING, BREED ASSORTIMENT
BESCHIKBAAR. GEREMD EN ONGEREMD, DRAAIBAAR OF VAST,
PLAAT OF (UITZETTENDE) STEEL

ITEM	Ø	↔	↑↓	↗↘	↖↕	↔↕
CSS30-4RPN	30 SQUARE		130			
CSS30-4RLN	30 SQUARE		130			

J19 SERIES



SHELF AND TRAY SLIDE BRACKET, FOLD DOWN,
STAINLESS STEEL

KLAPPKONSOLE ODER FESTE KONSOLE FÜR TABLETTRUTSCHEI-
BE, EDELSTAHL

CONSOLE RABATTABLE OU FIXE POUR RAMPE A
PLATEAU, INOX

VASTE OF NEERKLAPBARE DRAGERS VOOR CAFETERIA SYSTE-
MEN, RVS

ITEM	Ø	↔	↑↓	↗↘	↖↕	↔↕
J19-4355		321	86		102	
J19-4360		318	89		102	
J19-4967		219	90			
J17-4270		178	156			ZINC PLATED
J17-4273		178	156			STAINLESS STEEL
J19-4955-LT		309	111			NO TUBES
J19-4960-LT		306	108			NO TUBES
J19-4966		267	113			SHELF
J19-4960		306	108			

JE31 SERIES



GLASS CLAMP FOR SQUARE AND ROUND TUBING, STAINLESS
STEEL

GLASHALTER FÜR RUND UND 4-KANT ROHR, EDELSTAHL


CRAMPON VITRE POUR TUBES RONDES ET CARRÉS, INOX

GLASHOUDER VOOR RONDE EN VIERKANTE BUIS, RVS

ALSO AVAILABLE IN SS 316

ITEM	Ø	↔	↑↓	↗↘	↖↕	↔↕
JE31-2900		25	33.5		6	
JE31-2902	30	25	33.5		6	
JE31-2905		29	35		6	
JE31-2906	30	29	35		6	
JE31-2907		29	35		8	
JE31-2908	30	29	35		8	

B70 SERIES




GLASS CAPPING, STAINLESS STEEL

GLASEINFASSPROFIL, EDELSTAHL

PROFIL POUR VITRE, INOX

GLASDEURPROFIEL, RVS

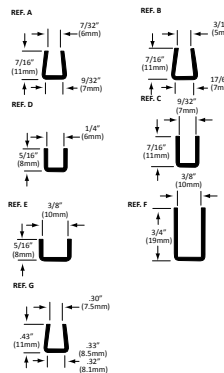

ITEM	Ø	↔	↑↓	↗↘	↖↕	↔↕
B70-1001 (A)		3650	11		7	
B70-1002 (B)		3650	11		7	
B70-1003 (C)		3650	11		7	
B70-1005 (D)		3650	8		6	
B70-1007 (E)		3650	8		10	
B70-1008 (F)		3650	19		10	
B70-1009 (G)		3650	11		9	

Items shown are for European market only, contact your CHG representative for further details

EU247



+31 (0)76-596 8699



COMPONENT
HARDWARE

CAFETERIA COMPONENTS

L82 SERIES



LED LIGHT, CE, IP 66 RATED, STAINLESS STEEL FACE

LED EINBAULEUCHTE, CE, IP 66, EDELSTAHL

LED ECLAIRAGE ENCASTRABLE POUR HOTTE, CE, IP 66, FACE INOX

LED INBOUW VERLICHTINGSARMATUUR, CE, IP 66, RVS AFWERKING

TEMPERATURE RATING OF 75°C

ITEM	Ø	↔	↕	↕	↕	↕
L82-1020-CE		610	150			
L82-1030-CE		914	150			
L82-1040-CE		1219	150			
L82-1030-LED-CE-N		914	150	NATURAL		
L82-1030-LED-CE-W		914	150	WARM		
L82-1040-LED-CE-N		1219	150	NATURAL		
L82-1040-LED-CE-W		1219	150	WARM		

CUP DISPENSERS



CUP DISPENSER, STAINLESS STEEL

BECHERSPENDER VERSTELLBAR, EDELSTAHL

DISTRIBUTEURS DE GOBELETS, INOX

BEKERVERDELERS, RVS

ITEM	Ø	↔	↕	↕	↕	↕
C3200CH	135		610	HORIZONTAL		
C3200CV	135		610	VERTICAL		
C3400CH	150		610	HORIZONTAL		
C3400CV	150		610	VERTICAL		
C3450SS	135		610			
C3500CH	170		610	HORIZONTAL		

CONTEMPO SERIES



CORNER BUMPERS AND STRIPS, BLACK, GREY


STOSSECKE UND STOSSSTREIFEN, SCHWARZ, GRAU

PARE CHOCS ET BANDE PARE CHOCS, NOIRE, GRIS

STOOTBUMPERS EN STRIPS, ZWART EN GRIJS

ITEM	Ø	↔	↕	↕	↕	↕
C60-1010	127		19			
C60-1030		88	23			
C60-1040		104	23			
C60-1050		111	32			
C60-5010		7600	22			
C60-1040-B		104	23			
C60-1050-B		111	32			

C65 SERIES



CORNER BUMPERS AND STRIPS, BLACK, GREY

STOSSECKE UND STOSSSTREIFEN, SCHWARZ, GRAU

PARE CHOCS ET BANDE PARE CHOCS, NOIRE, GRIS

STOOTBUMPERS EN STRIPS, ZWART EN GRIJS

ITEM	Ø	↔	↕	↕	↕	↕
C65-1010 (C)		97	25			
C65-2120 (D)		3050	22			
C65-3120 (D)		3050				
C65-5090 (A)		85	22			
C65-5000 (B)		76	22			

EU248

Items shown are for European market only, contact your CHG representative for further details

CAFETERIA COMPONENTS

BRITE GARD





BRITE GARD STAINLESS STEEL CLEANER / PROTECTANT
BRITE GARD EDELSTAHLREINIGER / SCHUTZMITTEL
BRITE GARD INOX NETTOYANT / PROTECTANT
BRITE GARD RVS REINIGER / BESCHERMER

ITEM	Ø	↔	↕	⬇	⬆	⬇
Q85-2004	118ML SPRAY					
Q85-2016	474ML SPRAY					
Q85-2128	3,8LTR CAN					

J63 & J64 SERIES



CAP STRIP AND DIVIDER BAR, STAINLESS STEEL
ABDECKUNG, EDELSTAHL
MOULURE, INOX
AFDEKLIJST, RVS



ITEM	Ø	↔	↕	⬇	⬆	⬇
J63-1451-8.2	2500					CAP STRIP
J64-1450-8.2	2500					DIVIDER BAR

6350 & J92 SERIES



SCRAP RING SOLID RUBBER, BLACK, GREY DROP IN SCRAP CHUTE, STAINLESS STEEL
GUMMI ABFALLROHRE FLACH SCHWARZ, GRAU
ABFALLROHRRING, EDELSTAHL
JOINTS VIDE ORDURES EN CAOUTCHOUC, NOIRE, GRIS JOINTS VIDE ORDURE EN, INOX A ENCASTRER
RUBBEREN AFVALKOKERRING, ZWART, GRIJS DROP IN AFVALKOKERRING, RVS

ITEM	Ø	↔	↕	⬇	⬆	⬇
6350-B	200	235	50			
6350-G	200	235	50			
6351		238				SCRAP RING
6360	207	268				WELDING RING
6352-G	251	279	68			
6352-Z	251	279	68			
J92-1000	152		133			
J92-5000	146		133			

J70 SERIES



COVE CORNER, SQUARE AND BULL NOSE INSERTS, STAINLESS STEEL
ECK EINSATZSTÜCKEN, EDELSTAHL
COIN A SOUDER EN ACIER, INOX
HOEK EN BUIS INLASSTUKKEN, RVS

ITEM	Ø	↔	↕	⬇	⬆	⬇
J70-4691	25					
J70-4701	25					
J72-4711	38					
J72-4731	50					
J74-4721	38					
J74-4723	44					
J74-4725	41					

Items shown are for European market only, contact your CHG representative for further details

EU249



+31 (0)76-596 8699



COMPONENT
HARDWARE

CABINET HARDWARE




- ✓ A VERY EXTENSIVE RANGE OF COMPONENTS TO ALLOW OUR CUSTOMERS TO DO ONE-STOP SHOPPING
- ✓ DECORATIVE HANDLES AND KNOBS AND PULLS COME IN A WIDE VARIETY OF MODELS AND SIZES
- ✓ NSF LISTED FULL EXTENSION DRAWER SLIDES WITH 50 AND 100 KG LOAD CAPACITY
- ✓ DRAWER ASSEMBLIES HAVE A HEAVY DUTY WELDED CONSTRUCTION

- ✓ EEN ZEER UITGEBREIDE RANGE COMPONENTEN DIE 'ONE-STOP SHOPPING' MOGELIJK MAAKT
- ✓ DECORATIEVE HENDELS, KNOPPEN EN GREPEN VERKRIJGBAAR IN EEN GROOT AANTAL MODELLEN EN AFMETINGEN
- ✓ NSF GECERTIFICEERDE VOLLEDIG UITSCHUIFBARE TELESKOOP LADENGELEIDERS MET 50 EN 100 KG DRAAGKRACHT
- ✓ SCHUIFLADES HEBBEN EEN 'HEAVY DUTY' GELASTE CONSTRUCTIE

- ✓ EINE SEHR GROSSE AUSWAHL VON KOMPONENTEN, DIE ES UNSEREN KUNDEN MÖGLICH MACHT ALLES AUS EINER HAND ZU BEKOMMEN (ONE-STOP SHOPPING)
- ✓ DEKORATIVE GRIFFE, KNÖPFE UND SCHLÖSSER IN EINER GROSSEN AUSWAHL VON MODELLEN UND GRÖSSEN
- ✓ NSF ZERTIFIZIERTE SCHUBLADENFÜHRUNGEN MIT 50 UND 100 KG TRAGLAST

EU250

Items shown are for European market only, contact your CHG representative for further details

P47, P48 & P49 SERIES 	TUBULAR HANDLES STAINLESS STEEL, HANDLES CHOME PLATED ROHRGRIFFE EDELSTAHL, GRIFFE VERCHROMT POIGNÉES TUBULAIRES, POIGNÉES CHROMÉES BUISHANDGREPEN RVS, HANDGREPEN VERCHROOMD	ITEM P47-0300 (A) P47-0450 (A) P48-1010 (B) P48-1012-M (B) P49-1500 (C) P49-1500-6 (C)	Ø	↔ 300 450 371 325 311 195	↕ 60 60 36 36 37 37	↗	↘	↻	
P49 SERIES 	HANDLE SUPPORT & BRACKET HANDGRIFFSTÜTZEN & BEFESTIGUNGEN SUPPORTS POUR TUBE HANDGREEPSTEUNEN EN BEVESTIGINGEN	ITEM P49-1010 P49-2100 P49-2200	Ø	↔ 25 36 36	↕ 63 75 75	↗	↘	↻	
P40 & P50-53 SERIES 	HANDLES & PULLS AUFBAUHANDGRIFFE POIGNÉES ET TIRANTS OPBOUWHANDVATEN	ITEM P40-1010 P50-1010-M P50-1011 P50-1011-M P51-1010 P52-1010 P53-1012	Ø	↔ 155 120 120 120 100 120 143	↕ 44 24 24 24 19 24 41	FINISH CHROME PLATED CHROME PLATED BUFFED SATIN BUFFED SATIN CHROME PLATED BLACK NYLON BLACK NYLON			
P44 & P45 SERIES 	PULLS, ALUMINUM, SATIN CHROME FINISH AUFBAUHANDGRIFFE ALU, VERCHROMT TIRANTS POUR MONTAGE ALU, CHROMÉS HANDVATEN ALUMINIUM, VERCHROOMD	ITEM P44-1010 P45-3000 P45-3500 P45-4000	Ø	↔ 117 76 89 102	↕ 25 32 32 32	↗	↘	↻	

Items shown are for European market only, contact your CHG representative for further details

EU251



+31 (0)76-596 8699



COMPONENT
HARDWARE

CABINET HARDWARE

P46 SERIES		ITEM	Ø	↔	↕	⬇	⬅	↗
	BAR PULL, STAINLESS STEEL	P46-1010		133	25			
	GRIFFE, EDELSTAHL	P46-1010-M		133	25			
	TIRANTS POUR MONTAGE, INOX	P46-1012		108	25			
	OPBOUWHANDVATEN, RVS	P46-1012-M		108	25			

P60, P62 & P63 SERIES		ITEM	Ø	↔	↕	⬇	⬅	↗
	RECESSED PULLS, STAINLESS STEEL	P60-1010-M	122					
	MUSCHELGRIFFE, EDELSTAHL	P62-1010-M		120	62			
	POIGNÉES À ENCASTRER, INOX	P62-1014		120	62			
	INBOUWHANDVATEN, RVS	P63-1012-M		120	62			

P73 SERIES		ITEM	Ø	↔	↕	⬇	⬅	↗
	SNAP-IN HANDLE, BLACK ABS	P73-0500		93	35			
	MUSCHELGRIFFE AUS KUNSTSTOFF SCHWARZ	P73-1000		138	37			
	POIGNÉES À ENCASTRER, ABS NOIR	P73-2000		189	44			
	INBOUWHANDVATEN, ABS ZWART							

P90 SERIES		ITEM	Ø	↔	↕	⬇	⬅	↗
	PADDLE LATCH, STAINLESS STEEL	P90-1000		55	41			
	MUSCHEL VERSCHLÜSSE, EDELSTAHL	P90-2000		84	68			
	POIGNÉES À CLAQUET, INOX	P90-2000-C		84	68			
	GREEPSLUITINGEN, RVS	P90-5000		124	98			
		P90-5000-C		124	98			

M15 SERIES 	CABINET HINGE AND LATCH, CHROME PLATED SCHARNIERE UND VERSCHLÜSSE, VERCHROMT VERROUX ET POIGNÉES, CHROMÉS GRENDELSCHARNIEREN EN SLUITINGEN, VERCHROOMD	ITEM M15-9210 M15-9211	Ø 	↔ 46 59	↕ 27 59	OFFSET 3 MM AND 10 3 MM AND 10
R74 SERIES 	LIFT-OFF HINGE, STAINLESS STEEL SCHARNIERE, AUSHEBBAR, EDELSTAHL PAUMELLES DÉGONDABLE, INOX AFNEEMBARE SCHARNIEREN, RVS	ITEM R74-8000-RH R74-8001-LH R74-8100-RH R74-8101-LH R74-9000-RH R74-9001-LH	Ø 	↔ 44 44 50 50 32 32	↕ 50 50 75 75 50 50	↕
M48 SERIES 	CONTINUOUS HINGE WITH STAINLESS STEEL PIN, STAINLESS STEEL KLAVIERBAND, EDELSTAHL CHARNIÈRES PIANO A SOUDER, INOX PIANOSCHARNIER MET ROESTVRIJSTALEN PIN, RVS	ITEM M48-0112 M48-0122 M48-0132 M48-0134 M48-0143 M48-0144 M48-0154	Ø 2,2 2,0 2,3 3,2 3,0 3,0 4,8	↔ 19 27 38 38 51 51 64	↕ 1830 1830 1830 1830 1830 1830 1830	↕ 0,9 GAUGE 1,0 GAUGE 0,9 GAUGE 1,6 GAUGE 1,3 GAUGE 1,5 GAUGE 1,6 GAUGE
M12, M75, M76 SERIES 	CABINET HINGE AND LATCH, STAINLESS STEEL SCHARNIERE UND VERSCHLUSSE, EDELSTAHL VERROUX ET POIGNÉES, INOX GRENDELSCHARNIEREN EN SLUITINGEN, RVS CORNER SHAPED HINGES, STAINLESS STEEL ABNEHMBARES FLAGGESCHARNIER, EDELSTAHL CHARNIÈRE DÉGONABLE SUR AIGUI OU AIGUI COIN, INOX DEMONTEERBAAR SCHARNIER RECHT OF IN HOEKMODEL, RVS	ITEM M12-9293 M12-9294 M12-9295 M75-1002 M75-5003	Ø 1 1.2 1.5 28 35	↔ 	↕ 35 50 70 52 76	↕

Items shown are for European market only, contact your CHG representative for further details

EU253




+31 (0)76-596 8699

CABINET HARDWARE

F81 SERIES



FULL EXTENSION DRAWER SLIDE, S/S
LADEGELEIDER VOLLEDIG UITTREKBAAR STAINLESS STEEL
VOLLAUSSZUG EDELSTAHL
COULISSES TÉLESCOPIQUES INOX



ITEM	↔	MAX	↕	LOAD CAPACITY
F81-0016	400	845	60	50 KG
F81-0020	500	1045	60	50 KG
F81-0022	550	1145	60	50 KG

S26 & 52 Series



DRAWER SLIDE FULL EXTENSION, STAINLESS STEEL
SCHUBLADENFÜHRUNGEN VOLLAUSSZUG, EDELSTAHL
GLISSIÈRES TÉLESCOPIQUES, INOX
TELESCOPISCHE LADENGELEIDERS, RVS

AVAILABLE WITH DELRIN BEARINGS AND SS BEARINGS

ITEM	Ø	↔	↕	LOAD CAPACITY
S26-0016		400	21.4	50 KG
S26-0018		450	21.4	50 KG
S26-0020		500	21.4	50 KG
S26-0022		550	21.4	50 KG
S26-0024		600	21.4	50 KG
S26-0026		650	21.4	50 KG
S52-0020		500	62	100 KG
S52-0022		550	62	100 KG
S52-0024		600	62	100 KG
S52-0026		650	62	100 KG

GASTRO SERIES



WIRE SHELVES, STAINLESS STEEL
GITTERROST GASTRONORM, EDELSTAHL
RAYONNAGE GASTRONORM, INOX
DRAADROOSTER, RVS


ALSO AVAILABLE IN OTHER TYPES

ITEM	Ø	↔	↕	↗	↘	↖
GASTRO 2/1		650	530			
GASTRO 1/1		530	325			
GASTRO 2/3		354	325			

P30 SERIES



UTILITY LOCK
DREHRIEGEL VERSCHLÜSSE
SERRURES POUR TIROIRS
TUIMELSLOTEN

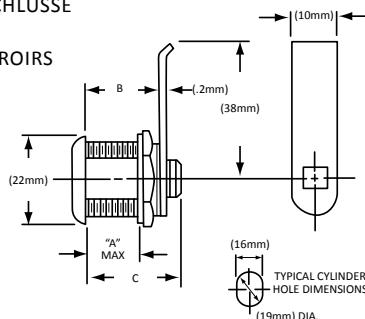

ITEM	Ø	↔	↕	KEYING
P30-4750	7	16	22	ALIKE
P30-4751	7	16	22	DIFFERENT
P30-4752	7	16	22	DIFFERENT & MASTER KEYED
P30-4760	17	22	28	ALIKE
P30-4761	17	22	28	DIFFERENT
P30-4762	17	22	28	DIFFERENT & MASTER KEYED
P30-4770	24	28	35	ALIKE
P30-4771	24	28	35	DIFFERENT
P30-4772	24	28	35	DIFFERENT & MASTER KEYED
P30-4780	28	35	41	ALIKE
P30-4781	28	35	41	DIFFERENT
P30-4782	28	35	41	DIFFERENT & MASTER KEYED

EU254

Items shown are for European market only, contact your CHG representative for further details

S90 SERIES



DRAWER ASSEMBLY, INCLUDING PAN, STAINLESS STEEL
SCHUBLADEN EINBAUELEMENT, MIT BEHÄLTER, EDELSTAHL
TIROIRS NEUTRES, AVEC RÉCIPIENTS, INOX
LADE INBOUWELEMENT, INCLUSIEF LEKBAK, RVS


DIFFERENT SIZES ON REQUEST

ITEM	Ø	↔	↑↓	↗↘	↖↙	↕
S90-0015-N		497	171			
S90-0015-C-N		497	171			
S90-0020-N		636	171			
S90-0020-C-N		636	171			

B57 & B58 SERIES



DOOR SHEAVES, ZINC PLATED, STAINLESS STEEL
SCHIEBETÜR ROLLEN, GALVANISIERT, EDELSTAHL
ROULETTE RÉGLABLE POUR PORTE GLISSANTE, GALVANISÉE, INOX
SCHUIFDEURWIELEN INSTELBAAR, GEGALVANISEERD, RVS




ITEM	Ø	↔	↑↓	↗↘	↖↙	↕
B58-5511	25	25.5	69		STEEL	
B58-5513	25	25.5	69		NY-	
B58-5515-SS	22.5	30	65	8.5	NY-	
B58-5521	25	25.5	69		STEEL	REAR
B58-5523	25	25.5	69		NY-	REAR
B58-5525-SS	22.5	30	32.5	8.5	NY-	REAR
B57-2000		2000	32			
B57-3000		3000	32			
B57-6000		6000	32			

BEARINGS



BALL BEARINGS, STAINLESS STEEL, STEEL, NYLON
FLACHES KUGELLAGERS, EDELSTAHL, STAHL, NYLON
ROULEMENT A BILLES, INOX, ACIER
VLAKKE KOGELLAGERS, RVS, STAAL, NYLON

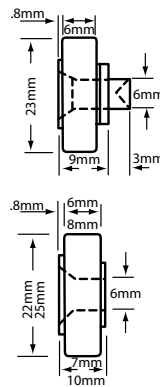

AVAILABLE WITH DIFFERENT SIZE SCREWS

ITEM	Ø	↔	↑↓	↗↘	↖↙	↕
B10-1210	23	6.3				
B20-1013	22	5.5				
B20-1019	25.4	7.9				

BEARINGS



BALL BEARINGS, STAINLESS STEEL, STEEL, NYLON
FLACHES KUGELLAGERS, EDELSTAHL, STAHL, NYLON
ROULEMENT A BILLES, INOX, ACIER
VLAKKE KOGELLAGERS, RVS, STAAL, NYLON

ITEM	Ø	↔	↑↓	↗↘	↖↙	↕
B20-1028	33.3	7.9				
B20-1032	25.4	5.5				
B20-1219	33.3	7.9				
B20-1230	23	6.3				
B20-1819	25.4	5.5				
B23-1013	33,3	7,9				
B24-1013	30	7,9				



- ✓ EQUIPMENT LEGS AVAILABLE IN VARIOUS SIZES WITH MOUNTING PLATE OR PROTRUDING STUD
- ✓ WIDE RANGE OF LATCHES AND HINGES FOR REFRIGERATION APPLICATIONS
- ✓ CE CERTIFIED SELF REGULATING CONDENSATE EVAPORATORS
- ✓ CONCEALED SELF CLOSING CARTRIDGE, HINGES ENSURE SILENT & SMOOTH OPERATION

- ✓ RVS STELPOTEN VERKRIJGBAAR IN VERSCHILLENDE AFMETINGEN MET SCHROEFDRAAD OF MONTAGEPLAAT
- ✓ EEN UITGEBREID ASSORTIMENT SCHARNIEREN EN SLUITINGEN VOOR KOELKASTEN EN INLOOP-KOELINGEN
- ✓ CE GECERTIFICEERDE ZELFREGULERENDE VERDAMPINGSBAKJES
- ✓ ZELFSLUITENDE PIVOTSCHARNIEREN VERZEKEREN EEN GERUISLOZE EN SOEPELE WERKING

- ✓ ANSCHRAUBFÜSSE IN VERSCHIEDENEN GRÖSSEN ERHÄLTICH. MIT ANSCHRAUBPLATTE ODER METRISCHEM GEWINDE
- ✓ GROSSE AUSWAHL AN SCHARNIEREN UND VERSCHLÜSSEN FÜR DIE KÄLTE- UND KÜHLTECHNIK
- ✓ CE GEPRÜFTE SELBST REGULIERENDE KONDENSWASSERVERDUNSTER
- ✓ SELBSTSCHLIESSENDE SCHARNIERE GARANTIEREN RUHIGEN UND SANFTEN BETRIEB

A59 SERIES

EQUIPMENT LEG, STAINLESS STEEL, M10

ANSCHRAUBFUSS, EDELSTAHL, M10

PIED RÉGLABLE, INOX, M10

STELPOOT, RVS, M10

*MOUNTING PLATE

ITEM	Ø	↔	↕	↓↑	↗	↘
A59-1000*	59	120/150	30			700
A59-1100*	59	120/180	60			700
A59-1150	59	120/150	60			700
A59-1250	59	120/180	30			700
A59-0090	59	100/160	60			700
A59-1150-SS	59	120/180	60			700
A59-1650	59	160/255	95			700

A65 SERIES

EQUIPMENT LEG, STAINLESS STEEL, M10

ANSCHRAUBFUSS, EDELSTAHL, M10

PIED RÉGLABLE, INOX, M10

STELPOOT, RVS, M10

*MOUNTING PLATE

ITEM	Ø	↔	↕	↓↑	↗	↘
A65-2000	65	120/150	30			700
A65-2100	65	120/180	60			700
A65-2200	65	120/150	30			700
A65-2300	65	120/180	60			700
A65-2000-IT*	65	120/150	30			700
A65-2400*	65	155/205	50			700
A65-2600-IT*	65	140/240	100			700
A65-2700*	65	155/205	50			700

A48, 50, 84 & 86 SERIES

EQUIPMENT LEG, STAINLESS STEEL, M12

ANSCHRAUBFUSS, EDELSTAHL, M12

PIED RÉGLABLE, INOX, M12

STELPOOT, RVS, M12

*ALL A48, 50, 84 AND 86 MODELS CAN BE PLATED MOUNTED BY FITTING THE MP1/SS ON TOP.

ITEM	Ø	↔	↕	↓↑	↗	↘
A48-5032-M	41		100	44		900
A48-5048-M	41		150	44		900
A50-5032-M	41		100	44		900
A50-5048-M	41		150	44		900
A84-5032-M	50		100	44		900
A84-5048-M	50		150	44		900
A86-5032-M	50	STUD	100	44		900
A86-5048-M	50	STUD	150	44		900
MP1/SS*			102 x 80			

Q77 SERIES

THERMAL MASTIC COATING

WÄRMELEITPASTE

PATE CONDUCTRICE

WARMTEGELEIDENDE PASTA

ITEM	
Q77-1000	305 ML
Q77-1240	3,68 L
Q77-1250	19 L
Q77-1260	200 L

Q75 & Q76 SERIES



SOUND DEADENER/ SOUND DEADENING PAD

SCHALLDÄMPFER/ SCHALLSCHUTZ POLSTER

PRODUITS D'INONORISATION/ PLAQUES D'INONORISATION

GELUIDSDEMPENDE LATEX & PASTA/ GELUIDSDEMPENDE PADS PASTA

ITEM	Ø	↔	↕	↗	↘	↖
Q75-1366			3,68 L - LATEX			
Q76-1250	90	250				

R24 SERIES



MAGNETIC/MECHANICAL EDGEMOUNT LATCH, CHROME PLATED

MAGNETISCHER VERSCHLUSS, VERCHROMT

LOQUETEAUX AVEC AIMANT, CHROMÉES

MAGNEETSLUITINGEN, VERCHROOMD

ITEM	Ø	↔	↕	↗	↘	↖
R24-9175	273	38				
R24-9175-C	273	38		CYLINDER LK		
R24-9175-X	273	38		OFFSET HDL		
R24-9175-XC	273	38		CYL LK, OFFSET HDL		

R25 SERIES



MAGNETIC EDGEMOUNT LATCH, CHROME PLATED

MAGNETISCHER VERSCHLUSS, VERCHROMT

LOQUETEAUX AVEC AIMANT, CHROMÉES

MAGNEETSLUITINGEN, VERCHROOMD

ITEM	Ø	↔	↕	↗	↘	↖
R25-1700-C	292	49		CYLINDER LK		
R25-1700-NC	292	49		CYLINDER LK		
R25-1700-XC	292	49		CYL LK, OFFSET HDL		
R25-1700-XNC	292	49		CYL LK, OFFSET HDL		

R30 SERIES



LATCH, SURFACE MOUNT, CHROME PLATED

VERSCHLÜSSE, VERCHROMT

LOQUETEAUX, CHROMÉES

SLUITINGEN, VERCHROOMD

ITEM	Ø	↔	↕	↗	↘	↖
R30-9140-5/8	178	53				
R30-9140-FL	172	53				


R35 SERIES

EDGEMOUNT LATCH, CHROME PLATED
 ZUGVERSCHLÜSSE, RECHTS, VERCHROMT
 FERMETURES POIGNÉES DROITE, CHROMÉES
 WERPSLUITINGEN, RECHTE HENDEL, VERCHROOMD

ITEM	Ø	↔	↕	↗	↘	↙
R35-1105		260	38			
R35-1105-C		260	38	CYLINDER LOCK		
R35-1105-X		260	38	OFFSET HANDLE		
R35-1105-XC		260	38	CYL LK, OFFSET HDL		
R35-3105-X		260	38	HIGH TEMPERATURE		

R42 SERIES

EDGEMOUNT HINGE
 KANTENSCHARNIERE FÜR KÜHLMÖBELTÜREN
 CHARNIÈRES À RAMPE
 HOEKSCHARNIEREN



*AVAILABLE WITH POWER SPRING KIT

ITEM	Ø	↔	↕	OFFSET
R42-2000		31	140	35 MM
R42-2840		21	127	22 MM
R42-2842*		24	127	28 MM
R42-2843		24	127	28 MM
R42-2844*		24	127	41 MM
R42-2855		31	140	28 MM
R42-2800	POWER SPRING KIT			
R42-2810	POWER SPRING KIT			

R45 & 50 SERIES

LIFT OFF EDGEMOUNT HINGES
 KANTENSCHARNIERE FÜR KÜHLMÖBELTÜREN
 CHARNIÈRES À RAMPE
 AFNEEMBARE HOEKSCHARNIEREN

ITEM	Ø	↔	↕	OFFSET
R45-1010		28	110	30 MM
R50-2850		30	146	41 MM
R50-2850 SPO		30	146	35 MM
R50-2850-BLK		30	146	41 MM
R50-2850-SS		30	146	41 MM

R56 SERIES

CARTRIDGE HINGE
 SELBSTSCHLIESSENDE SCHARNIERE
 CHARNIÈRES PIVOT
 PIVOT SCHARNIEREN

ALL ITEMS AVAILABLE IN LEFT HAND VERSION

ITEM	
R56-1010	75 X 98
	PIVOT BRACKETS
R56-5010	79 X 25 - RH CARTRIDGE VERTICAL
R56-5011	79 X 25 - RH CARTRIDGE HORIZONTAL
R56-5017	79 X 25 - RH PIVOT HORIZONTAL
R56-7011	79 X 25 - RH PIVOT VERTICAL
R56-7040	79 X 25 - RH DOUBLE PIVOT HORIZONTAL
R56-MINI	38 X 76

R60 SERIES




HEAVY DUTY LID HINGE FOR LARGE COOKING KETTLE
DECKEL-DREHGELENKE, FÜR GROSSE KOCHKESSELS
CHARNIÈRE SANS BRAS SUPPORT, POUR LES GRANDES BOUILLIÈRES
ZWAAR DEKSEL SCHARNIER, VOOR GROTE KETELS

ITEM

R60-1080030-C90

Aperture angle A1 = 90°
Available on request: 65, 70, 80 or 85°
Angle of decent A2 = about 10°
Data only applicable for horizontal supporting surfaces

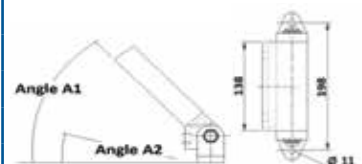

T12 SERIES



CONDENSATE EVAPORATOR
TAUWASSERVERDUNSTER
BACS ÉVAPORATEURS
VERDAMPINGSBAKJES

ITEM


	↔	↕	
T12-0372	120 X 317	70	160 WATT
T12-0372-CE	120 x 317	70	160 WATT
T12-5200	120 x 317	70	300 WATT
T12-5200-CE	120 x 317	70	300 WATT
T12-0372-P	120 x 317	70	160 WATT
T12-5200-P	120 x 317	70	300 WATT

T12-3390* 150 82 BRACKET

T21 & T22 SERIES




PILASTERS, ALUMINUM
LOCHSCHIENE ALUMINIUM
CRÉMAILLÈRES ALUMINIUM
STELLIJSTEN ALUMINIUM
PILASTERS, STAINLESS STEEL
LOCHSCHIENE EDELSTAHL
CRÉMAILLÈRES INOX
STELLIJSTEN RVS



ITEM

	Ø	↔	↕	↗	↘	↖
T22-0016			406			
T22-0018			457			
T22-0024			610			
T22-0048			1219			
T22-0072			1828			
T22-1024			610			
T22-1048			1219			
T22-1060			1524			
T22-1072			1828			

T30 SERIES



SNAP-IN SHELF SUPPORT
KLAMMER
TAQUETS
CLIPS VOOR STELLIJSTEN

*STAINLESS STEEL

ITEM

	Ø	↔	↕	↗	↘	↖
T30-5030* (C)		22				
T30-5031 (D)		16				
T30-5032 * (D)		16				
T30-5055* (B)		19				
T30-5130 * (A)		22				
T30-5131 (A)		22				

W19 SERIES

WALK-IN LATCH
SICHERHEITSVERSCHLÜSSE
LOQUETEAUX DE SÉCURITÉ
SCHARNIEREN VOOR INLOOPKOELING

- C MEANS WITH CYLINDER LOCK
- CHOOSE APPROPRIATE SAFETY RELEASE, W28 SERIES

ITEM	Ø	↔	↕	OFFSET
W19-1000		266	51	0 MM - 19 MM
W19-1000-C		266	51	0 MM - 19 MM
W19-1500		266	51	19 MM - 41 MM
W19-1500-C		266	51	19 MM - 41 MM
W19-2000		266	51	41 MM - 64 MM
W19-2000-C		266	51	41 MM - 64 MM

W38 SERIES

HEAVY DUTY WALK-IN LATCH, CHROME PLATED
VERSCHLÜSSE, VERCHROMT
LOQUETEAUX, CHROMÉES
SLUITINGEN, VERCHROOMD

- C MEANS WITH CYLINDER LOCK
- CHOOSE APPROPRIATE SAFETY RELEASE, W28 SERIES


ITEM	Ø	↔	↕	OFFSET
W38-1000		283	51	0 MM - 19 MM
W38-1000-C		283	51	0 MM - 19 MM
W38-1500		283	51	19 MM - 41 MM
W38-1500-C		283	51	19 MM - 41 MM
W38-2000		283	51	41 MM - 64 MM
W38-2000-C		283	51	41 MM - 64 MM

W99 SERIES

WALK-IN LATCH, STAINLESS STEEL 316
VERSCHLÜSSE, EDELSTAHL 316
LOQUETEAUX, INOX 316
SLUITINGEN, RVS 316

- C MEANS WITH CYLINDER LOCK
- CHOOSE APPROPRIATE SAFETY RELEASE, W28 SERIES

ITEM	Ø	↔	↕	↖	↗	↘
W99-3800-SS		283	50			
W99-3800-SS-C		283	50			
W99-3805-SS		283	50			

W28 SERIES

SAFETY RELEASE / SS
SICHERHEITSINNENÖFNER
DÉCONDAMNATIONS
NOODONTGRENDINGEN

ITEM	Ø	↔	↕	↖	↗	↘
W28-2325 (B)		82.5				
W28-2400X (B)		100				
W28-2400-SS (A)		100				
W28-2600X (B)		150				
W28-2600-SS (A)		150				
W28-3400X (C)		102				
W28-2800X (B)		200				

W99 SERIES



HINGE ASSEMBLY, STAINLESS STEEL 316

TÜRBAND, EDELSTAHL 316

CHARNIÈRES, INOX 316

VLGSCHARNIER, RVS 316

ITEM	Ø	↔	↕	↗	↘	↖
W99-4100-SSLH		263	108			
W99-4100-SSRH		263	108			
W99-6015-SS		387	128			

W59 & W60 SERIES



WALK-IN DOOR HINGES, CHROME PLATED


SCHARNIERE, VERCHROMT

CHARNIÈRES, CHROMÉES

SCHARNIEREN, VERCHROOMD

ITEM	Ø	↔	↕	↗	↘	↖
W60-1000		254	143			
W60-1000-S		175	143			
W59-1000		236	143			

VENT PORTS



ROUND OR SQUARE VENT PORT

DRUCKAUSGLEICHS VENTIL RUND ODER VIERECKIG

SOUPAPES D'ÉQUILIBRAGE DE PRESSION, RONDE OU CARRÉ

DRUKVEREFFENINGSVENTIEL ROND OF VIERKANT

ITEM		⊖	↔	↕	↗	↘
W86-1010 (A)		120V/8W	165	165	76-108	
W86-1012 (A)		220V/8W	165	165	76-108	
W86-2010 (A)		NON HEAT	165	165	76-108	
W88-1010 (B)		120V/23W	127	127	102	
W88-1012 (B)		220V/23W	127	127	102	
W88-1010-6000 (B)		120V/23W	127	127	150	
W88-2010 (B)		NON HEAT	127	127	102	

SAFE-T-VU WINDOW



SAFE-T-VU WINDOW

SAFE-T-VU SICHERHEITSFENSTER


FENÊTRE SAFE-T-VU

SAFE-T-VU RAAM

ITEM	Ø	↔	↕	↗	↘	↖
W90-1424-4AG		413	667		102	
W90-1424-4HA		356	610		102	

HA = HEATED

G = NON HEATED

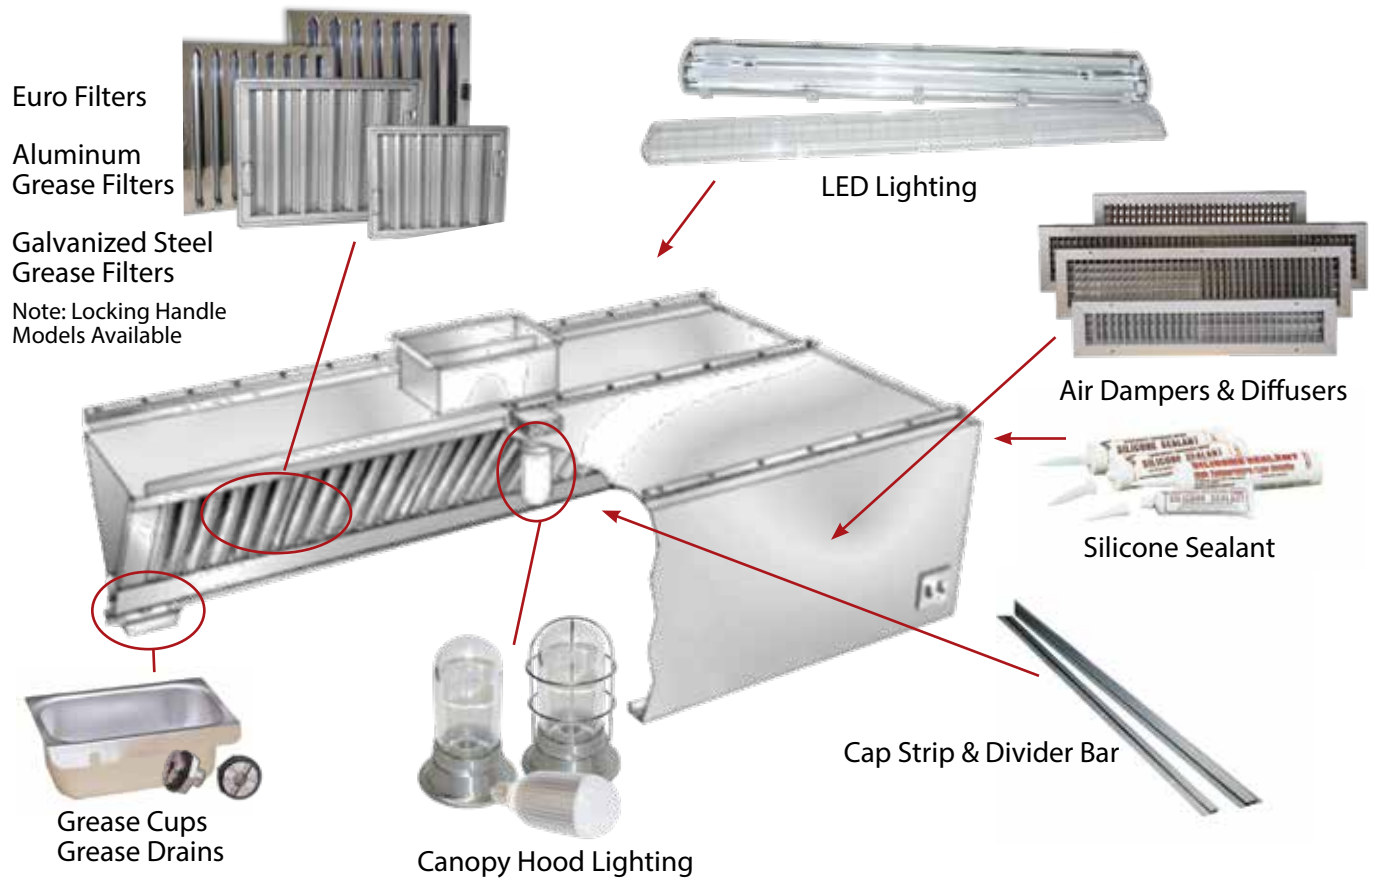

- ✓ EASY TO INSTALL ALL STAINLESS STEEL GREASE FILTERS IN A WIDE VARIETY OF DIMENSIONS
- ✓ EFFICIENTLY REMOVE A SIGNIFICANT AMOUNT OF GREASE BEFORE IT CAN ENTER THE VENTILATION SYSTEM
- ✓ EASY TO INSTALL CANOPY LIGHTING FIXTURES, GREASEPROOF, WATERPROOF AND HEATPROOF

- ✓ EENVOUDIG TE INSTALLEREN VETFILTERS VERKRIJGBAAR IN VELE AFMETINGEN
- ✓ VETFILTERS VANGEN EEN GROOT GEDEELTE VAN HET VET OP VOORDAT HET IN HET VENTILATIESYSTEEM KAN TERECHT KOMEN
- ✓ EENVOUDIG TE MONTEREN LICHTARMATUREN, RESISTENT TEGEN VET, WATER EN HITTE

- ✓ EINFACH ZU INSTALLIERENDE FLAMMSCHUTZFILTER IN ALLEN GÄNGIGEN GRÖSSEN
- ✓ EFFIZIENTE FETTFILTERUNG BEVOR DAS DAS BELÜFTUNGSSYSTEM ERREICHT WIRD
- ✓ EINFACH ZU INSTALLIERENDE, HITZE,-WASSER UND FETTBESTÄNDIGE HAUBENBELEUCHTUNG

Items shown are for European market only, contact your CHG representative for further details

EU263



+31 (0)76-596 8699

CANOPY HOOD

FLAMEGARD TYPE IV		ITEM	Ø	↔	↕	↕	↕	↕
	FLAME GARD BAFFLE FILTER, STAINLESS STEEL, 20MM	FG20-300500		300	500			
	FLAME GARD FETTFANGFILTER, EDELSTAHL, 20MM	FG20-400400		400	400			
	FLAME GARD FILTRES POUR HOTTES, INOX, 20MM	FG20-400500		400	500			
	FLAME GARD 495495	FG20-495495		495	495			
	FLAME GARD VETFILTER, RVS, 20MM	FG20-500300		500	300			
		FG20-500400		500	400			
		FG20-500500		500	500			
		DIN 18869-5:2007-08 A CLASS RATING						
		FGA20-500500		500	500	(BAUART A)		
		FGA20-400400		400	400	(BAUART A)		

FLAMEGARD TYPE VI		ITEM	Ø	↔	↕	↕	↕	↕
	FLAME GARD BAFFLE FILTER, STAINLESS STEEL, 45MM	FR51-1016		254	406			
	FETTFANGFILTER, EDELSTAHL, 45MM	FR51-1020		254	508			
	FILTRES POUR HOTTES, INOX, 45MM	FR51-1216		305	406			
	VETFILTERS, RVS, 45MM	FR51-1220		305	508			
		FR51-1616		406	406			
		FR51-1620		406	508			
		FR51-1625		406	635			
		FR51-2016		508	406			
		FR51-2020		508	508			
		FR51-2025		508	635			

L55 SERIES		ITEM	Ø	↕	
	CANOPY LIGHT FIXTURES WITH THERMAL AND CLEAR GLASS INCLUDING WIRE PROTECTION GUARD	L55-1004	140	222	TUFF SKIN
	DECKENBELEUCHTUNG LICHTARMIERUNG, UND THERMO	L55-1024	140	222	TUFF SKIN WIRE GUARD
	ODER KLARES GLAS, MIT ODER OHNE WARMESCHUTZ	L55-2004	140	222	CLEAR
	ARMATURE D'ECLAIRAGE AVE PROTECTION THERMIQUE	L55-2024	140	222	CLEAR WIRE GUARD
	VERLICHTINGSARMATUUR MET THERMISCH EN HELDER GLAS, MET METALEN BESCHERMING	LED-40001N	70	157	WITH GLOBE

L82 SERIES		ITEM	Ø	↔	↕	↕	↕	↕
	LED LIGHT, CE, IP 66 RATED, STAINLESS STEEL FACE	L82-1020-CE		610	150			
	LED EINBAULEUCHTE, CE, IP 66, EDELSTAHL	L82-1030-CE		914	150			
	LED ECLAIRAGE ENCASTRABLE POUR HOTTE, CE, IP 66, FACE	L82-1040-CE		1219	150			
	INOX	L82-1030-LED-CE-N		914	150	NATURAL		
	LED INBOUW VERLICHTINGSARMATUUR, CE, IP 66, RVS AFWERKING	L82-1030-LED-CE-W		914	150	WARM		
		L82-1040-LED-CE-N		1219	150	NATURAL		
		L82-1040-LED-CE-W		1219	150	WARM		



EU264

Items shown are for European market only, contact your CHG representative for further details

LED-PL35 SERIES



LED CANOPY HOOD LIGHT 3,5 WATT 270 LUMEN

LED AFZUIGKAPLAMP 3,5 WATT 270 LUMEN

LED HAUBENLAMPE, 3,5 WATT 270 LUMEN

LED LAMPE POUR HOTTE, 3,5 WATT 270 LUMEN

3.5 WATT LIGHT PRODUCES 270 LUMENS, 2800 TO 3200 KELVINS,
SATIN FINISH BEZEL MATCHES HOOD, 120 DEGREE ADJUSTABLE BEAM ANGLE

ITEM

LED-PL35-N

LED CEILING LIGHT, 240V - 4 W
NATURAL WHITE 4000 - 4500K

LED-PL35-W

LED CEILING LIGHT, 240V - 4 W
WARM WHITE 2800 - 3200K

LED-PL35-W-IP65

LED CEILING LIGHT, 240V - 4 W
WARM WHITE 2800 - 3200K, IP65

J63 & 64 SERIES





CAP STRIP AND DIVIDER BAR, STAINLESS STEEL

ABDECKUNG, EDELSTAHL

MOULURE, INOX

AFDEKLIJST, RVS



ITEM

J63-1450-8.2

Ø

↔

↕

↗

↘

↔

2500

CAP STRIP

J64-1451-8.2

2500

DIVIDER BAR

90 VML SERIES



REGISTER, MULTI DAMPER, ALUMINUM

LUFTEIN-/AUSLASSGITTER VERSTELLBAR, ALUMINIUM

MULTI VALVE DAMPER, ALUMINUM

MULTI VALVE DAMPER, ALUMINUM

ITEM

90VML-20X4

Ø

↔

↕

↗

↘

↔

500

100

90VML-20X6

500

150

90VML-24X12

600

300

90VML-24X4

600

100

90VML-24X6

600

150

90VML-24X8

600

200

90VML-30X6

750

150

90VML-36X6

900

150

M90 SERIES



SILICONE SEALANT, FOODGRADE, HIGH TEMPERATURE RESISTANCE, 5 DIFFERENT COLORS

HOCH TEMPERATURSILIKONE, 5 FARBEN

SILICONE HAUT TEMPERATURE, 5 COULEURS

TEMPERATUURBESTENDIG SILICONENKIT, FOODGRADE, 5 KLEUREN

ITEM

M90-1010

CLEAR 305 ML

M90-1012

ALUMINUM 305 ML

M90-1014

WHITE 305 ML

M90-1016

BLACK 305 ML

M90-1018

HI TEMP RED 305 ML

EUROPEAN INDEX

PRODUCT	PAGE	CATEGORY
Baffle filters	EU264	Canopy Hood
Bearings	EU255	Cabinet Hardware
Brackets, fold down	EU247	Cafeteria Component
Cabinet hinge	EU253	Refrigeration Components
Canopy light	EU264, 265	Canopy Hood
Cap strip and divider bars	EU249, 265	Cafeteria Component
Condensate evaporator	EU260	OEM
Continious hinge	EU253	Cabinet Hardware
Cartridge hinges	EU259	OEM
Casters	EU247	Cafeteria Component
Corner bumpers and strips	EU248	Cafeteria Component
Cove Corners	EU249	Cafeteria Component
Cup dispensers	EU248	Cafeteria Component
Dipperwel assembly	EU244	Cafeteria Component
Door sheaves	EU255	Cabinet Hardware
Drains	EU244	Plumbing Components
Drawer slides	EU254	Cabinet Hardware
Equipment legs	EU238, 239, 257	Work Tables
EZ sink	EU243	Plumbing Components
Faucets	EU242, 243	Plumbing Components
Glass capping	EU247	Cafeteria Component
Glass clamp	EU247	Cafeteria Component
Handles	EU251, 252	Cabinet Hardware
Hinges	EU253, 259, 262	OEM
Hose reels	EU243	Plumbing Components
Insert feet	EU237, 238, 239	Work Tables
Latches	EU252, 253, 258, 259, 261	OEM
LED light	EU248, 264, 265	Canopy Hood
Lift off hinge	EU259	Cabinet Hardware
Mini basket drain	EU244	Plumbing Components
Overflow tubes	EU245	Plumbing Components
Paddle latch	EU252	Cabinet Hardware
Pilasters	EU260	OEM
Register, multi damper	EU265	Canopy Hood

PRODUCT	PAGE	CATEGORY
Safety release	EU261	OEM
Safe-T-VU window	EU262	OEM
Service sink	EU243	Plumbing Components
Scrap rings	EU249	Cafeteria Component
Silicone sealant	EU265	Canopy Hood
Sink bowls	EU245	Plumbing Components
Snap-in shelf support	EU260	OEM
Sound deadener	EU258	OEM
Thermal mastic coating	EU257	OEM
Utility locks	EU254	Cabinet Hardware
Vent port	EU262	OEM
Water station filler	EU244	Plumbing Components
Wire shelves	EU254	Cabinet Hardware

EU266

Items shown are for European market only, contact your CHG representative for further details

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
301616	A18	FA51-1016	A20	Highlighted Models Are Our Top Sellers					
301620	A18	FA51-1020	A20						
301625	A18	FA51-1216	A20						
302016	A18	FA51-1220	A20						
302020	A18	FA51-1616	A20						
302025	A18	FA51-1620	A20						
750002	A29	FA51-1625	A20						
750505-C	A31	FA51-2016	A20						
750511-C	A31	FA51-2020	A20						
750517-C	A31	FA51-2025	A20						
750606	A34	FA51-2520	A20						
750710	A30	FG51-1020	A20						
750715	A30	FG51-1220	A20						
750723	A30	FG51-1616	A20						
750707	A30	FG51-1620	A20						
750712	A30	FG51-1625	A20						
750720	A30	FG51-2016	A20						
750808-C	A31	FG51-2020	A20						
750811-C	A31	FG51-2025	A20						
750817-C	A31	FG51-2516	A20						
750823-C	A31	FG51-2520	A20						
751117-C	A31	FG74-0506	A26						
751123-C	A31	FG99-0005	A26						
751212	A30	FR51-1016	A20						
751220	A30	FR51-1020	A20						
751620	A30	FR51-1216	A20						
751717-C	A31	FR51-1220	A20						
751723-C	A31	FR51-1616	A20						
752020	A34	FR51-1620	A20						
760804-D14	A29	FR51-1625	A20						
90VML-20X4	A26	FR51-2016	A20						
90VML-24X4	A26	FR51-2020	A20						
90VML-24X6	A26	FR51-2025	A20						
90VML-24X8	A26	FR51-2516	A20						
90VML-24X10	A26	FR51-2520	A20						
90VML-24X12	A26	FR51-X015	A19						
90VML-30X6	A26	J63-1451	A22						
90VML-36X6	A26	J63-1451-8	A22						
ACC-10X6	A29	J63-1451-9	A22						
ACC-12X8	A29	J63-1451-10	A22						
ACC-18X14	A29	J63-1651-78	A22						
EFI-SQL	A28	J63-1651-120	A22						
EFI-SQS	A28	J63-2651-84	A22						
EFI-UB	A28	J63-2651-120	A22						
F10-1187	A23	J64-1450	A22						
F11-004	A25	J64-1450-8	A22						
F11-0012	A24	J64-1450-9	A22						
F11-0014	A24	J64-1450-10	A22						
F11-0034	A24	J64-1651-78	A22						
F11-0038	A24	J64-1651-120	A22						
F11-0100	A24	J64-2651-84	A22						
F11-0112	A24	J64-2651-120	A22						
F11-0012A	A24	M90-0310	A27						
F11-0012B	A24	M90-0312	A27						
F11-0114	A24	M90-0314	A27						
F12-0034	A25	M90-1010	A27						
F12-0078	A25	M90-1012	A27						
F12-0118	A25	M90-1014	A27						
F12-0138	A25	M90-1016	A27						
F12-0158	A25	M90-1018	A27						
F15-0019	A23	M90-5012	A27						
F15-250T	A25	MCD 116	A18						
F15-375T	A25	MCD 116-1.5	A18						
F15-500EMT	A25	MCD 120	A18						
F15-500P	A25	MCD 123	A18						
F15-500T250P	A25	MCD 126	A18						
F15-625T375P	A25	MCD 128	A18						
F15-750P	A25	MCD 133	A18						
F15-1000P	A25	MCD 136	A18						
F15-2500-C	A23	MCD 139	A18						
F15-4000-C	A23	Q37-0250	A23						
F40-1020	A21	Q86-0001	A27						
F40-1620	A21	Q86-0010	A27						
F40-1625	A21	Q86-0015	A27						
F40-2020	A21	Q86-1000	A27						
F40-2025	A21	Q86-1250	A27						
F41-0001	A21	Q86-1500	A27						
F41-1020	A21	Q86-1625	A27						
F41-1620	A21	Q86-2000	A27						
F41-1625	A21	Q99-1000	A27						
F41-2020	A21								
F41-2025	A21								

Reach-In Refrigeration Index

B

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
10-516	B62	R42-X020	B50	T21-1072	B59				
1094	B61	R42-X021	B50	T21-1144	B59				
20-001	B62	R42-X038	B50	T22-0024	B59				
5270	B61	R42-X103	B50	T22-0036	B59				
5804	B62	R45-1010	B48	T22-0042	B59				
6601-B	B62	R45-X003	B50	T22-0048	B59				
6601	B62	R45-X004	B50	T22-0060	B59				
6449	B61	R50-2850	B48	T22-0072	B59				
GFK-6449-C	B63	R50-2850-NL	B48	T22-0144	B59				
GFK-6449-S	B63	R50-2850-SPO	B48	T22-1024	B59				
Hinge Selector Guide	B40	R50-2850-SS	B48	T22-1036	B59				
M15-9210	B43	R50-2851	B48	T22-1042	B59				
M15-9211	B43	R50-X003	B50	T22-1048	B59				
P30-0802	B38, B40, B41	R50-X003-SS	B50	T22-1060	B59				
P40-1010	B37	R50-X004	B50	T22-1072	B59				
P48-1010	B37	R50-X004-A	B50	T22-1144	B59				
P48-1012	B37	R50-X004-C	B50	T23-0024	B59				
P48-X002	B37	R50-X004-SS	B50	T23-0036	B59				
P49-1500	B37	R50-X004-SSA	B50	T23-0042	B59				
P49-1500-6	B37	R50-X005	B50	T23-0048	B59				
P99-100SL-01	B55	R50-X005-SS	B50	T23-0060	B59				
Q24-0420	B60	R51-2000	B49	T23-0072	B59				
Q24-0520	B60	R51-2000-CS	B49	T23-0144	B59				
Q77-1000	B60	R51-2000-RS	B49	T23-1024	B59				
Q77-1240	B60	R56-1010	B51	T23-1036	B59				
Q77-1250	B60	R56-5010	B51, B52	T23-1042	B59				
Q77-1260	B60	R56-5011	B51, B52	T23-1048	B59				
Q99-1000	B60	R56-5016	B52	T23-1060	B59				
R20-1010	B47	R56-5017	B51, B52	T23-1072	B59				
R20-1020	B47	R56-6010	B51, B52	T23-1144	B59				
R24-9175	B40	R56-6011	B52	T30-5030	B59				
R24-9175-C	B40	R56-7010	B53	T30-5031	B59				
R24-9175-X	B40	R56-7011	B51, B53	T30-5032	B59				
R24-9175-XC	B40	R56-7014	B53	T30-5050	B59				
R24-Y001	B40	R56-7015	B53	T30-5051	B59				
R25-1700-C	B41	R56-7040	B51, B53	T30-5055	B59				
R25-1700-NC	B41	R56-7041	B53	T30-5130	B59				
R25-1700-XNC	B41	R56-8010	B54	T30-5130-TAB	B59				
R25-1700-XC	B41	R56-8011	B54	T30-5131	B59				
R25-X002	B41	R56-8040	B54	T30-9901-UT	B59				
R25-Y001	B41	R56-8041	B54	T32-5020	B59				
R26-1000	B39	R88-1000	B61	T34-1010	B59				
R26-Y001	B39	R90-1002	B60	T42-3330	B63				
R27-1010-X	B42	T10-3351	B60	T54-0937	B64				
R30-9140-FL	B43	T12-0370	B56	T54-1500	B64				
R30-9140-5/8	B43	T12-0370-P	B57	T54-1750	B64				
R35-1105	B38	T12-0372	B56	T54-2000	B64				
R35-1105-C	B38	T12-0372-CE	B56	T54-2250	B64				
R35-1105-X	B38	T12-0372-CE48	B56	T54-2750	B64				
R35-1105-XC	B38	T12-0372-CE84	B56	T54-3000	B64				
R35-3105-X	E12	T12-0372-P	B57	T55-0598	B64				
R35-Y001	B38	T12-3390	B56	T55-20-010	B64				
R35-Y005	B38	T12-5000	B56	T55-20-011	B64				
R40-1010	B47	T12-5000-CSA	B56	T55-20-053	B64				
R40-X002	B53	T12-5000-P	B57	T90-330	B58				
R40-X003	B53	T12-5200	B56	T90-6142	B58				
R42-2000	B46	T12-5200-CE	B56	T90-6812	B58				
R42-2800	B45	T12-5200-CE48	B56						
R42-2801	B45	T12-5200-CE84	B56						
R42-2810	B45	T12-5200-CSA	B56						
R42-2840	B47	T12-5200-P	B57						
R42-2841	B45	T21-0024	B59						
R42-2842	B45	T21-0036	B59						
R42-2842-BB	B45	T21-0042	B59						
R42-2844	B46	T21-0048	B59						
R42-2855	B46	T21-0060	B59						
R42-2880	B44	T21-0072	B59						
R42-2883	B44	T21-0144	B59						
R42-2890-K	B44	T21-1024	B59						
R42-2893	B44	T21-1036	B59						
R42-X003	B50	T21-1042	B59						
R42-X004	B50	T21-1048	B59						
R42-X008	B50	T21-1060	B59						

Highlighted Models
Are Our Top Sellers

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
FIP-PANEL FASTENERS	C92	W38-1500	C70	W59-2025	C80	W61-2150	C78		
HINGE SELECTOR	C71	W38-1500-C	C70	W59-2037	C80	W61-2162	C78		
J60-2220	C94	W38-1500-SN	C70	W59-2112	C80	W61-2175	C78		
J60-2240	C94	W38-1600LSSGE	C79	W59-2125	C80	W61-2187	C78		
J60-2260	C94	W38-2000	C70	W59-2137	C80	W61-2200	C78		
J60-2270	C94	W38-2000-C	C70	W59-2150	C80	W61-3000	C78		
J60-2320	C94	W38-6000-C-GE	C75	W59-2162	C80	W61-3012	C78		
M90-1010	C94	W50-1000	C69	W59-2175	C80	W61-3025	C78		
M90-1012	C94	W55-0001	C81	W59-2187	C80	W61-3037	C78		
Q99-1000	C94	W55-1000	C81	W59-2200	C80	W61-3112	C78		
RIGID RAIL- PANEL FASTENERS	C96	W56-1000	C81	W59-3000	C80	W61-3125	C78		
R55-1010	C81	W58-1000	C79	W59-3012	C80	W61-3137	C78		
R55-1020	C81	W58-1012	C79	W59-3025	C80	W61-3150	C78		
SLAB FOAM- PANEL FASTENERS	C94	W58-1025	C79	W59-3037	C80	W61-3162	C78		
T90-330	C84	W58-1037	C79	W59-3112	C80	W61-3175	C78		
T90-6142	C85	W58-1112	C79	W59-3125	C80	W61-3187	C78		
T90-6812	C85	W58-1125	C79	W59-3137	C80	W61-3200	C78		
W19-1000	C69	W58-1137	C79	W59-3150	C80	W61-4000	C78		
W19-10S00-C	C69	W58-1150	C79	W59-3162	C80	W61-4012	C78		
W19-1000-SN	C69	W58-1162	C79	W59-3175	C80	W61-4025	C78		
W19-1000-C-SN	C69	W58-1175	C79	W59-3187	C80	W61-4037	C78		
W19-1500	C69	W58-1187	C79	W59-3200	C80	W61-4112	C78		
W19-1500-C	C69	W58-1200	C79	W59-4000	C80	W61-4125	C78		
W19-2000	C69	W58-2000	C79	W59-4012	C80	W61-4137	C78		
W19-2000-C	C69	W58-2012	C79	W59-4025	C80	W61-4150	C78		
W27-0001-C	C94	W58-2025	C79	W59-4037	C80	W61-4162	C78		
W27-0001-CTS	C94	W58-2037	C79	W59-4112	C80	W61-4175	C78		
W27-0002-C	C94	W58-2112	C79	W59-4125	C80	W61-4187	C78		
W27-1173H	C93	W58-2125	C79	W59-4137	C80	W61-4200	C78		
W27-5202	C91	W58-2137	C79	W59-4150	C80	W62-0001	C77		
W27-5204	C91	W58-2150	C79	W59-4162	C80	W62-2001	C77		
W27-5304	C91	W58-2162	C79	W59-4175	C80	W77-1375	C77		
W27-5306	C91	W58-2175	C79	W59-4187	C80	W88-1010	C86		
W27-5501	C93	W58-2187	C79	W59-4200	C80	W88-1012	C86		
W27-5502	C93	W58-2200	C79	W60-1000	C76	W88-2010	C86		
W27-5550	C93	W58-3000	C79	W60-1000-S	C76	W91-1414-HGHF	C87		
W27-5562	C93	W58-3012	C79	W60-1012	C76	W91-14143-UGUF	C87		
W27-5568	C93	W58-3025	C79	W60-1012-S	C76	W91-1424-HGHF	C87		
W27-5575	C93	W58-3037	C79	W60-1025	C76	W91-14243-UGUF	C87		
W27-5581	C93	W58-3112	C79	W60-1025-S	C76	W94-1010	C82		
W27-5600A	C93	W58-3125	C79	W60-1037	C76	W94-1020	C82		
W27-5600B	C93	W58-3137	C79	W60-1037-S	C76	W94-2010	C82		
W27-7300	C89	W58-3150	C79	W60-1112	C76	W94-2020	C82		
W27-7400	C89	W58-3162	C79	W60-1125	C76	W95-1010	C83		
W27-8801-SP	C89	W58-3175	C79	W60-1137	C76	W95-1020	C83		
W27-8801-SS	C89	W58-3187	C79	W60-1150	C76	W95-1030	C83		
W27-8800TT-SP	C89	W58-3200	C79	W60-1162	C76	W95-2010	C83		
W27-8800TT-SS	C89	W58-4000	C79	W60-1175	C76	W95-2020	C83		
W27-8803	C89	W58-4012	C79	W60-1187	C76	W95-2030	C83		
W27-8804	C89	W58-4025	C79	W60-1200	C76	W99-0100-H	C75		
W28-1000	C72,C75	W58-4037	C79	W60-2000	C76	W99-0100-L	C75		
W28-1200	C72	W58-4112	C79	W60-2025	C76	W99-2001	C75		
W28-2300-SSX	C71, C75	W58-4125	C79	W60-2112	C76	W99-2001-GE	C75		
W28-2325X	C71	W58-4137	C79	W60-2137	C76	W99-2063	C75		
W28-2400X	C71	W58-4150	C79	W61-1000	C78	W99-2063-GE	C75		
W28-2400-SSX	C71	W58-4162	C79	W61-1012	C78	W99-3800-SS	C74		
W28-2600X	C71	W58-4175	C79	W61-1025	C78	W99-3800-SS-C	C74		
W28-2605	C71	W58-4187	C79	W61-1037	C78	W99-3815-SS	C74		
W28-2800X	C71	W58-4200	C79	W61-1112	C78	W99-3815-SS-C	C74		
W28-3400X	C71	W59-1000	C80	W61-1125	C78	W99-3820-SS	C74		
W28-3800X	C71	W59-1012	C80	W61-1137	C78	W99-4100-SSLH	C73		
W29-1000X	C68	W59-1025	C80	W61-1150	C78	W99-4100-SSRH	C73		
W29-2000	C68	W59-1037	C80	W61-1162	C78	W99-6015-SS	C73		
W29-5000-4X	C72	W59-1112	C80	W61-1175	C78				
W30-1000-L	C68	W59-1125	C80	W61-1187	C78				
W30-2000-L	C68	W59-1137	C80	W61-1200	C78				
W31-1000X	C68	W59-1150	C80	W61-2000	C78				
W38-1000	C70	W59-1162	C80	W61-2012	C78				
W38-1000-C	C70,C75	W59-1175	C80	W61-2025	C78				
W38-1000-C-GE	C75	W59-1187	C80	W61-2037	C78				
W38-1000-SN	C70	W59-1200	C80	W61-2112	C78				
		W59-2000	C80	W61-2125	C78				
		W59-2012	C80	W61-2137	C78				

**Highlighted Models
Are Our Top Sellers**

D

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
L10-X006	D107	LED-RB08-DIM-x	D96	Highlighted Models Are Our Top Sellers					
L10-X007	D101	LED-RB12-DIM-x	D96						
L10-X008	D101	LED-RB18-DIM-x	D96						
L10-X020	D101, D115	LED-RB24-DIM-x	D96						
L10-X026	D101	LED-RB30-DIM-x	D96						
L10-Y005	D101	LED-RB36-DIM-x	D96						
L10-Y010	D101	LED-RB48-DIM-x	D96						
L10-Y016	D101	LED-RB-X110	D96						
L20-1010	D102	LED-RB-X112	D96						
L20-1010-CL	D100, D102	LED-RB-X115	D96						
L20-1010-CSA	D102	LED-RB-X150	D96						
L20-1010-L07C	D100	LED-RB-X155	D96						
L20-1010-N	D100, D102	LED-RB-X160	D96						
L50-X009	D109	LED-RB-X170	D96						
L50-X011	D109	LED-RB-X200	D96						
L50-Y001	D109	LED-RB-X206	D96						
L55-1004	D108	LED-RB-X212	D96						
L55-1004-CSA	D108	LED-RB-X218	D96						
L55-1004-HT	D108	LED-RB-X224	D96						
L55-1024	D108	LED-RB-X236	D96						
L55-1024-CSA	D108	LED-RB-X270	D96						
L55-1024-HT	D108	LED-RB-X300	D96						
L55-2004	D108	LED-RB-X500	D96						
L55-2004-CSA	D108	LED-RB-X501	D96						
L55-2004-HT	D108	LED-RR12-x	D97						
L55-2024	D108	LED-RR18-x	D97						
L55-2024-CSA	D108	LED-RR20-x	D97						
L55-2024-HT	D108	LED-RR30-x	D97						
L55-LEDN-1004	D107	LED-RR35-x	D97						
L55-LEDN-1024	D107	LED-RR40-x	D97						
L55-LEDN-2004	D107	LED-RR48-x	D97						
L55-LEDN-2024	D107	LED-RR-X100	D97						
L55-LEDW-1004	D107	LED-RR-X103	D97						
L55-LEDW-1024	D107	LED-RR-X112	D97						
L55-LEDW-2004	D107	LED-RR-X139	D97						
L55-LEDW-2024	D107	LED-RR-X201	D97						
L55-X003	D109	LED-RR-X202	D97						
L55-X003-HT	D109	LED-RR-X203	D97						
L55-X006	D109	LED-RR-X204	D97						
L55-X022	D109	LED-RR-X302	D97						
L55-Y001	D109	LED-RR-X303	D97						
L55-Y001-CSA	D109	LED-RR-X304	D97						
L55-Y001-HT	D109	LED-RR-X305	D97						
L82-1020	D106	LED-RR-400	D97						
L82-1030	D106	LED-RR-401	D97						
L82-1040	D106	LED-RR-402	D97						
L82-Y001	D109	LED-RR-402	D97						
L82-Y002	D109	LED-TB40-T6-W	D99						
L82-Y003	D109	LED-TB40-T6A-W	D99						
L87-1004	D106	R58-1010	D110						
L87-Y001	D109	R58-1020	D110						
LED48X62221N	D98	R61-8410	D111						
LED-212009C	D98	R62-8406	D111						
LED-40000N-B	D107	R69-1630	D111						
LED-40000N-P	D107	R70-0720	D111						
LED-40000W-B	D107	R70-0723	D111						
LED-40001N	D107	R71-0721	D111						
LED-E26E17ADPT	D99	R73-1210	D110						
LED-L80-15DN	D103	R73-1212	D110						
LED-L80-15DW	D103	R73-2201	D110						
LED-L80-20DN	D103	R73-2202	D110						
LED-L80-20DW	D103	R73-2203	D110						
LED-L82-1030-40N	D104	VXS-100-GL	D101						
LED-L82-1030-40W	D104	VXS-100-GL-WG	D101						
LED-L82-1040-50N	D104	VXS-100-PC	D101						
LED-L82-1040-50W	D104	VXS-100-PX	D101						
LED-L82-RF1030-40N	D104	VXS-100-PX-WG	D101						
LED-L82-RF1030-40W	D104	VXS-CSA-GL	D107						
LED-L82-RF1040-50N	D104	VXS-CSA-GL-WG	D107						
LED-L82-RF1040-50W	D104	VXS-CSA-PC	D107						
LED-L87-1004-30N	D105	VXS-CSA-PX	D107						
LED-L87-1004-30W	D105	VXS-CSA-PX-WG	D107						
LED-L87-1008-30N	D105	VXS-LEDN10PC	D99						
LED-L87-1008-30W	D105								
LED-L87-1030N	D105								
LED-L87-1030W	D105								
LED-PK100DD-C	D100								
LED-PK100DD-N	D100								
LED-PL35-W	D107								

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
A10-0010-C	E115, E116, E117	A44-X327-C	E134	A99-9906-C	E127				
A10-0221-C	E115	A44-X341-C	E134	A99-9940-C	E130				
A10-0421-C	E115	A46-4048-C	E128	AB48-5048-C	E125				
A10-0611-C	E115	A46-4080-C	E128	AB84-5048-C	E125				
A10-0631-C	E115	A46-4160-C	E128	AE41-4002-C	E130				
A10-0641-C	E115	A46-4272-C	E128	AE60-1453	E130				
A10-0651-C	E115	A46-4288-C	E128	AE60-1653	E130				
A10-0654-C	E119	A46-6048-C	E128	AE60-X010	E130				
A10-0811-C	E115, E145	A46-6080-C	E128	AE61-2003-C	E122				
A10-0831-C	E115, E136	A46-6160-C	E128	AE61-2104-C	E122				
A10-0841-C	E115, E136	A46-6272-C	E128	AE61-4002-C	E122				
A10-0851-C	E115, E136	A46-6288-C	E128	AE61-5002-C	E122				
A10-0852-C	E115, E136	A47-9932-C	E120	AE62-2104-C	E122				
A10-0852-S	E122	A48-5032-C	E124	AE62-4002-C	E122				
A10-0853-C	E125, E136	A48-5048-C	E124	AE62-5002-C	E122				
A10-0854-C	E125, E136	A50-5032-C	E124	AE63-2003-C	E122				
A10-0881-C	E117, E136	A50-5048-C	E124	AE63-2104-C	E122				
A10-0884-C	E117, E136	A50-9704-C	E124	AE63-4002-C	E122				
A10-1000	E116	A50-9939-C	E120	AE63-5002-C	E122				
A10-1500	E116	A52-9907-C	E123	AP61-4003-C	E121				
A10-9904-C	E119	A60-0431	E131	AP62-4003-C	E121				
A11-0851-C	E115	A60-0441	E131	AP63-2003-C	E121				
A11-0854-C	E119	A60-0623	E131	AP63-4003-C	E121				
A14-0221-C	E118	A60-0631	E131	AP64-4003-C	E121				
A14-0224-C	E119	A60-0633	E131						
A14-0411-C	E118	A60-0641	E131						
A14-0421-C	E118	A60-1438	E132						
A14-0424-C	E119	A60-1651	E131						
A14-0611-C	E118	A60-1653	E131						
A14-0651-C	E118	A60-1653-SP1	E131						
A14-0653-C	E119	A60-1653-SP2	E131						
A14-0654-C	E125	A60-1653-SP3	E131						
A15-0851-C	E118	A60-1653-SP4	E131						
A15-0854-C	E119	A60-2105	E132						
A16-0206-C	E114	A60-2205	E132						
A18-0202-C	E114	A60-2210	E132						
A18-0203-C	E114	A60-2305	E132						
A18-0206-C	E114	A60-2405	E132						
A18-0306-C	E114	A60-2724	E143						
A18-0402-C	E114	A60-4444	E143						
A18-0406-C	E114	A60-X001	E131						
A18-9900-C	E114	A60-X003	E131						
A18-X001	E113, E114	A70-1000	E133						
A19-1000	E113	A70-1010	E133						
A20-0206-C	E114	A70-1010-M	E133						
A20-0406-C	E114	A70-1020	E133						
A24-0206-C	E113	A70-1020-GL	E133						
A24-0207-C	E113	A70-2000	E133						
A26-0207-C	E113	A70-2010	E133						
A28-0207-C	E113	A70-2010-M	E133						
A35-1010	E135	A70-2020	E133						
A35-1010-SS	E135	A70-X011	E133						
A35-1020	E135	A71-1020	E133						
A35-1020-SS	E135	A72-0811	E123						
A35-1025-SS	E135	A76-4460	E143						
A35-1030	E135	A77-5048-C	E123						
A35-2010	E135	A78-5048-C	E123						
A35-2020	E135	A79-5048-C	E123						
A35-2030	E135	A84-5048-C	E124						
A37-1010	E134	A85-9706-C	E124						
A37-1020	E134	A86-5048-C	E124						
A37-2010	E134	A88-9902-C	E120						
A37-2020	E134	A90-9902-C	E120						
A44-X301-C	E134	A92-8048-C	E126						
A44-X309-C	E134	A93-8048-C	E126						
		A95-8048-C	E126						

Highlighted Models
Are Our Top Sellers

Institutional Casters Index

F

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
C11-1020	F148	C13-3441	F149	C23-2350	F151	C60-5010	F157	CMS1-35KBN	F152
C11-1030	F148	C13-3450	F149	C23-2350-SS	F153	C60-X100-B	F157	CMS1-35KPN	F152
C11-1031	F148	C13-3451	F149	C23-2351	F151	C65-1010	F156	CMS1-3BBN	F146
C11-1040	F148	C13-3540	F149	C23-2351-SS	F153	C65-2072	F156	CMS1-3BPN	F146
C11-1041	F148	C13-3541	F149	C23-2435	F151	C65-2120	F156	CMS1-3PBB	F147
C11-1050	F148	C13-3550	F149	C23-2436	F151	C65-5000	F156	CMS1-3PPB	F147
C11-1051	F148	C13-3551	F149	C23-2450	F151	C65-5090	F156	CMS1-35KBN	F152
C11-2030	F148	C13-5430	F149	C23-2450-SS	F153	C83-0506	F155	CMS1-35KPN	F152
C11-2031	F148	C13-5431	F149	C23-2451	F151	C83-0516	F155	CMS1-4BBN	F146
C11-2040	F148	C21-1035	F150	C23-2451-SS	F153	C86-0506	F155	CMS1-4BPN	F146
C11-2041	F148	C21-1035-R	F150	C23-2535	F151	C86-0516-C	F155	CMS1-4KBN	F146
C11-2050	F148	C21-1036	F150	C23-2536	F151	C99-1030	F153	CMS1-4PBB	F147
C11-2051	F148	C21-1050	F150	C23-2550	F151	C99-1031	F153	CMS1-4PPB	F147
C11-3041	F148	C21-1050-R	F150	C23-2550-SS	F153	C99-1050	F153	CMS1-4RBB	F147
C13-1140	F149	C21-1051	F150	C23-2551	F151	C99-1051	F153	CMS1-4RPB	F147
C13-1141	F149	C21-2035	F150	C23-2551-SS	F153	CLP2-3BBN	F143	CMS1-5BBN	F146
C13-1150	F149	C21-2035-R	F150	C23-3135	F151	CLP2-3BPN	F143	CMS1-5BPN	F146
C13-1151	F149	C21-2036	F150	C23-3136	F151	CMP1-35KBN	F142	CMS1-5KBN	F146
C13-1240	F149	C21-2050	F150	C23-3150	F151	CMP1-35KPN	F142	CMS1-5KPN	F146
C13-1241	F149	C21-2050-R	F150	C23-3150-SS	F153	CMP1-3BBN	F142	CMS1-5PBB	F147
C13-1250	F149	C21-2050-SS	F153	C23-3151	F151	CMP1-3BPN	F142	CMS1-5PPB	F147
C13-1251	F149	C21-2051	F150	C23-3151-SS	F153	CMP1-3KBN	F142	CMS1-5PPB-TB	F147
C13-1330	F149	C21-2051-SS	F153	C23-3235	F151	CMP1-3KPN	F142	CMS1-5RBB	F147
C13-1331	F149	C21-3035	F149	C23-3236	F151	CMP1-3PBB	F142	CMS1-5RPB	F147
C13-1340	F149	C21-3036	F149	C23-3250	F151	CMP1-3PPB	F142	CMS2-3BBN	F146
C13-1350	F149	C21-3040	F149	C23-3251	F151	CMP1-4BBN	F142	CMS2-3BPN	F146
C13-1351	F149	C21-3041	F149	C23-3335	F151	CMP1-4BPN	F142	CMS2-3PBB	F147
C13-1440	F149	C21-3050	F149	C23-3336	F151	CMP1-4KBN	F142	CMS2-3PPB	F147
C13-1450	F149	C21-3051	F149	C23-3350	F151	CMP1-4KPN	F142	CMS2-35KBN	F152
C13-1451	F149	C23-1135	F151	C23-3351	F151	CMP1-4PBB	F142	CMS2-35KPN	F152
C13-1540	F149	C23-1136	F151	C23-3435	F151	CMP1-4PPB	F142	CMS2-4BBN	F146
C13-1541	F149	C23-1150	F151	C23-3436	F151	CMP1-4RBB	F142	CMS2-4BPN	F146
C13-1550	F149	C23-1151	F151	C23-3450	F151	CMP1-4RPB	F142	CMS2-4KBN	F146
C13-1551	F149	C23-1150-R	F152	C23-3451	F151	CMP1-5BBN	F142	CMS2-4KPN	F146
C13-2140	F149	C23-1235	F151	C23-3535	F151	CMP1-5BPN	F142	CMS2-4PBB	F147
C13-2141	F149	C23-1236	F151	C23-3536	F151	CMP1-5KBN	F142	CMS2-4PPB	F147
C13-2150	F149	C23-1250	F151	C23-3550	F151	CMP1-5KPN	F142	CMS2-4RBB	F147
C13-2151	F149	C23-1251	F151	C23-3551	F151	CMP1-5PBB	F142	CMS2-4RPB	F147
C13-2240	F149	C23-1335	F151	C25-1000	F160	CMP1-5PPB	F142	CMS2-5BBN	F146
C13-2241	F149	C23-1336	F151	C25-1001	F154	CMP1-5RBB	F142	CMS2-5BPN	F146
C13-2250	F149	C23-1350	F151	C31-2050	F154	CMP1-5RBB-TB	F142	CMS2-5KBN	F146
C13-2251	F149	C23-1351	F151	C31-2051	F154	CMP1-5RPB	F142	CMS2-5KPN	F146
C13-2340	F149	C23-1350-R	F152	C31-2060	F154	CMP1-5RPB-B	F142	CMS2-5PBB	F147
C13-2341	F149	C23-1435	F151	C31-2061	F154	CMP4-5BBB	F142	CMS2-5PPB	F147
C13-2350	F149	C23-1436	F151	C31-2080	F154	CMP4-5BPB	F142	CMS2-5RBB	F147
C13-2351	F149	C23-1450	F151	C31-2081	F154	CMP4U-5PBB	F142	CMS2-5RBB-TB	F147
C13-2440	F149	C23-1451	F151	C47-0306-C	F155	CMP4U-5PPB	F142	CMS2-5RPB	F147
C13-2441	F149	C23-1450-R	F152	C47-0316-C	F155	CMPU-5BBN	F142	CMS3-3BBN	F146
C13-2450	F149	C23-1535	F151	C48-03185-C	F155	CMPU-5BPN	F142	CMS3-3BPN	F146
C13-2451	F149	C23-1536	F151	C47-0406-C	F155	CMPU-5KBN	F142	CMS3-3PBB	F147
C13-2540	F149	C23-1550	F151	C47-0416-C	F155	CMPU-5KPN	F142	CMS3-3PPB	F147
C13-2541	F149	C23-1551	F151	C47-0506	F155	CMPU-5PBB	F142	CMS3-35KBN	F152
C13-2550	F149	C23-2135	F151	C47-0516	F155	CMPU-5PPB	F142	CMS3-35KPN	F152
C13-2551	F149	C23-2136	F151	C50-0406-C	F155	CMPU-5RBB	F142	CMS3-4BBN	F146
C13-3140	F149	C23-2150	F151	C50-0416-C	F155	CMPU-5RPB	F142	CMS3-4BPN	F146
C13-3141	F149	C23-2150-SS	F153	C50-0506-C	F155	CMR1-3BPN	F143	CMS3-4KBN	F146
C13-3150	F149	C23-2151	F151	C50-0516-C	F155	CMR1-3KPN	F143	CMS3-4KPN	F146
C13-3151	F149	C23-2151-SS	F153	C60-1010	F157	CMR1-3PPB	F143	CMS3-4PBB	F147
C13-3240	F149	C23-2235	F151	C60-1010-SR	F157	CMR1-4BPN	F143	CMS3-4PPB	F147
C13-3241	F149	C23-2236	F151	C60-1012	F157	CMR1-4KPN	F143	CMS3-4RBB	F147
C13-3250	F149	C23-2250	F151	C60-1020	F157	CMR1-4PPB	F143	CMS3-4RPB	F147
C13-3251	F149	C23-2250-SS	F153	C60-1030	F157	CMR1-4RPB	F143	CMS3-5BBN	F146
C13-3340	F149	C23-2251	F151	C60-1040	F157	CMR1-5BPN	F143	CMS3-5BPN	F146
C13-3341	F149	C23-2251-SS	F153	C60-1040-B	F157	CMR1-5KPN	F143	CMS3-5PBB	F147
C13-3350	F149	C23-2335	F151	C60-1050	F157	CMR1-5PPB	F143	CMS3-5PPB	F147
C13-3440	F149	C23-2336	F151	C60-1050-B	F157	CMR1-5RPB	F143	CMS3-5RBB	F147

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
CMS3-5RBB-TB	F157	CMT1-4RPB	F145	CSTPK-5PUES-4B	F141				
CMS3-5RPB	F157	CMT1-5BBN	F145	CSTPK-5PUES-4B-6	F141				
CMS4-35KBN	F146	CMT1-5BPN	F145	CSTPK-5PUP	F141				
CMS4-35KPN	F146	CMT1-5KBN	F145	CSTPK-5PUP-4	F141				
CMS4-3BBN	F156	CMT1-5KPN	F145	CSTPK-5PURS	F141				
CMS4-3BPN	F156	CMT1-5PBB	F145	CSTPK-5PURS-B	F141				
CMS4-3KBN	F156	CMT1-5PPB	F145	CSTPK-5PUSP	F141				
CMS4-3KPN	F156	CMT1-5RBB	F145	CSTPK-5PUSP-B	F141				
CMS4-3PBB	F157	CMT1-5RPB	F145	CSTPK-5PUTS-1B	F141				
CMS4-3PPB	F157	CMT2-3BBN	F145	CSTPK-5PUTS-2B	F141				
CMS4-4BBN	F156	CMT2-3BPN	F145	CSTPK-5PUTS-3B	F141				
CMS4-4BBNS	F156	CMT2-3PBB	F145	CSTPK-5PUTS-4	F141				
CMS4-4BPN	F156	CMT2-3PPB	F145	CSTPK-5PUUP	F141				
CMS4-4BPNS	F156	CMT2-5BBN	F145	CSTPK-5PUUP-4B	F141				
CMS4-4KBN	F156	CMT2-5BPN	F145	CSTPK-5PUUP-B	F141				
CMS4-4KPN	F156	CMT2-5PBB	F145	CSTPK-5RES	F141				
CMS4-4PBB	F157	CMT2-5PPB	F145	CSTPK-5RES-3	F141				
CMS4-4PPB	F157	CMT2-5RBB	F145	CSTPK-5RSP	F141				
CMS4-4RBB	F157	CMT2-5RPB	F145	CSTPK-5RSP-T1	F141				
CMS4-4RPB	F157	CMT3-5BBN	F145	CSTPK-5RTS-1	F141				
CMS4-5BBN	F156	CMT3-5BPN	F145	CSTPK-5RUP	F141				
CMS4-5BBN-TB	F156	CMT4-3BBN	F145	CSTPK-6PBB	F141				
CMS4-5BPN	F156	CMT4-5PBB	F145	CTB-1500	F139				
CMS4-5KBN	F156	CMT4-5PPB	F145						
CMS4-5KPN	F156	CMT5-5BBN	F145						
CMS4-5PBB	F157	CMT5-5BPN	F145						
CMS4-5PBB-TB	F147	CMT5-5PBB	F145						
CMS4-5PBB-SS	F157	CMT5-5PPB	F145						
CMS4-5PPB	F157	CMT5-5RBB	F145						
CMS4-5PPB-SS	F157	CMT5-5RPB	F145						
CMS4-5RBB	F157	CSTPK-1PUP-4B	F140						
CMS4-5RBB-TB	F157	CSTPK-2PUP-4B	F140						
CMS4-5RPB	F157	CSTPK-2PUTS-B	F140						
CMS5-35KBN	F146	CSTPK-3BTS	F140						
CMS5-35KPN	F146	CSTPK-3BTS-7B	F140						
CMS5-3BBN	F156	CSTPK-3BTS-B	F140						
CMS5-3BPN	F156	CSTPK-3PAL	F140						
CMS5-3PBB	F157	CSTPK-3PAL-1	F140						
CMS5-3PPB	F157	CSTPK-3PES	F140						
CMS5-4BBN	F156	CSTPK-3PRS	F140						
CMS5-4BPN	F156	CSTPK-3PSP	F140						
CMS5-4PBB	F157	CSTPK-3PUES-3	F140						
CMS5-4PPB	F157	CSTPK-3PUES-3B	F140						
CMS5-4RBB	F157	CSTPK-3PUES-4	F140						
CMS5-4RPB	F157	CSTPK-3PUES-4B	F140						
CMS5-5BBN	F156	CSTPK-3PUUP-B	F140						
CMS5-5BPN	F156	CSTPK-3PUUP-4B	F140						
CMS5-5PBB	F157	CSTPK-4PBB	F140						
CMS5-5PPB	F157	CSTPK-4PSP	F140						
CMS5-5RBB	F157	CSTPK-4PUTS-1B	F140						
CMS5-5RBB-TB	F157	CSTPK-4RES	F140						
CMS5-5RPB	F147	CSTPK-5BTS	F140						
CMT1-3BBN	F147	CSTPK-5BUP	F140						
CMT1-3BPN	F145	CSTPK-5PES	F140						
CMT1-3KBN	F145	CSTPK-5PES-1	F140						
CMT1-3KPN	F145	CSTPK-5PES-2	F140						
CMT1-3PBB	F145	CSTPK-5PES-3	F140						
CMT1-3PPB	F145	CSTPK-5PES-4B-6	F140						
CMT1-4BBN	F145	CSTPK-5PFC-B	F141						
CMT1-4BPN	F145	CSTPK-5PRS	F141						
CMT1-4KBN	F145	CSTPK-5PRS-B	F141						
CMT1-4KPN	F145	CSTPK-5PRS-SP1	F141						
CMT1-4PBB	F145	CSTPK-5PSP	F141						
CMT1-4PPB	F145	CSTPK-5PTS	F141						
CMT1-4RBB	F145	CSTPK-5PUES-3B	F141						

Highlighted Models
Are Our Top Sellers

Cabinet Hardware Index

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
B10-1013	G188	GBS15-4118-Q	G164	P45-4010	G167	S10-Y001	G179, G191	SE90-0020-N	G184
B10-1016	G188	GBS15-4124-Q	G164	P46-1010	G167	S15-1016	G181	SG-101	G163
B10-1025	G188	GBS15-4130-Q	G164	P46-1012	G167	S15-1020	G181	Highlighted Models Are Our Top Sellers	
B10-1034	G188	GBS15-413030Q	G164	P47-1012	G166	S15-1022	G181		
B10-1822	G188	GBS15-4132-Q	G164	P47-1018	G166	S25-0014	G180		
B10-X004	G196	GBS15-4136-Q	G164	P48-1010	G165	S25-0016	G180		
B10-X008	G196	GBS15-414030Q	G164	P48-1012	G165	S25-0018	G180		
B10-X009	G196	GBS15-4142-Q	G164	P48-X002	G165	S25-0020	G180		
B10-X012	G190	IR-0031	G191	P49-1010	G166	S25-0022	G180		
B10-X013	G190	IR-1061	G191	P49-1500	G165	S25-0024	G180		
B13-1010	G190	IR-2112	G191	P49-1500-6	G165	S25-0026	G180		
B14-1010	G190	IR-2263	G191	P49-2100	G166	S25-0028	G180		
B20-1013	G188, G189	M10-8332	G170	P49-2200	G166	S25-2014	G180		
B20-1019	G188, G189	M10-8333	G170	P50-1010	G167	S25-2016	G180		
B20-1028	G188, G189	M11-8201	G170	P50-1011	G167	S25-2020	G180		
B20-1032	G188, G189	M12-9293	G173	P50-5000	G168	S25-2022	G180		
B20-1219	G188, G188	M12-9294	G173	P51-1010	G167	S25-2028	G180		
B20-1230	G188, G189	M12-9295	G173	P51-1024	G167	S26-0014	G179		
B20-1819	G188, G189	M15-9210	G171	P52-1010	G167	S26-0016	G179		
B23-1013	G188, G189	M15-9211	G171	P53-1012	G167	S26-0018	G179		
B24-1013	G188, G189	M21-2580	G177	P60-1010	G168	S26-0020	G179		
B25-1810	G191	M22-2420	G177	P62-1010	G168	S26-0022	G179		
B30-1013	G188	M22-2430	G177	P62-1014	G168	S26-0026	G179		
B30-1034	G188	M24-2260	G177	P63-1012	G168	S26-Y001	G179, G191		
B30-1210	G188	M25-9469	G177	P68-1010	G170	S30-1020	G182		
B30-X003	G188	M27-2490	G177	P70-1010	G170	S30-2018	G182		
B30-X004	G188	M30-2400	G176	P73-1000	G168	S30-2022	G182		
B30-X008	G188	M30-5920	G176	P73-2000	G168	S30-3022	G182		
B33-1010	G190	M32-2401	G176	P75-1000-Q	G163	S30-Y001	G182		
B33-1016	G190	M35-1000	G176	P75-5000	G163	S35-1016	G181		
B34-1010	G190	M35-2000	G176	P80-3000	G166	S35-1018	G181		
B34-1016	G190	M36-0201	G176	P80-3020	G166	S35-1020	G181		
B40-1240	G190	M36-0611	G176	P80-3030	G166	S35-1022	G181		
B56-1096	G192	M36-0801	G176	P88-1010	G178	S35-1024	G181		
B57-0048	G192	M48-0112	G171	P90-1000	G169	S35-1026	G181		
B57-0060	G192	M48-0121	G171	P90-2000	G169	S52-0020	G178		
B57-0072	G192	M48-0122	G171	P90-2000-C	G169	S52-0022	G178		
B57-0120	G192	M48-0131	G171	P90-5000	G169	S52-0024	G178		
B57-0144	G192	M48-0132	G171	P90-5000-C	G169	S52-0026	G178		
B58-5511	G192	M48-0134	G171	P91-5000	G169	S52-2020	G178		
B58-5513	G192	M48-0142	G171	Q20-2081	G187	S52-2022	G178		
B58-5521	G192	M48-0143	G171	Q20-2095	G187	S52-2024	G178		
B58-5523	G192	M48-0144	G171	Q21-5003	G187	S52-2026	G178		
B60-1086	G192	M74-2078	G173	Q21-5017	G187	S52-X001	G178, G191		
B62-1093	G192	M74-3078	G173	Q24-0220	G187	S52-X101	G178, G191		
CD-1000	G194	M75-1002	G172	Q24-0225	G187	S80-1520	G183		
CD-Y004	G194	M75-5003	G172	Q24-0230	G187	S80-2020	G183		
GBS15-1112-Q	G164	M80-2500	G170	Q24-0320	G187	S81-1520-C	G183		
GBS15-1112-QP	G164	P10-0370	G175	Q24-0420	G187	S81-2020-C	G183		
GBS15-1116-Q	G164	P11-0480	G175	Q24-0520	G187	S90-0015	G184		
GBS15-1116-QP	G164	P20-0490	G175	Q26-3062	G187	S90-0015-C-N	G184		
GBS15-1118-Q	G164	P22-0006	G175	Q26-4071	G187	S90-0015-N	G184		
GBS15-1118-QP	G164	P30-0802	G174	Q26-4072	G187	S90-0020	G184		
GBS15-1124-Q	G164	P30-1000	G174	R74-8000-RH	G172	S90-0020-C-N	G184		
GBS15-1124-QP	G164	P30-4750	G174	R74-8001-LH	G172	S90-0020-N	G184		
GBS15-1130-Q	G164	P30-4751	G174	R74-8100-RH	G172	S90-X004	G186		
GBS15-1130-QP	G164	P30-4752	G174	R74-8101-LH	G172	S90-X032	G184		
GBS15-113030Q	G164	P30-4760	G174	R74-9000-RH	G172	S90-X033	G184		
GBS15-1132-Q	G164	P30-4761	G174	R74-9001-LH	G172	S95-1000	G185		
GBS15-1132-QP	G164	P30-4762	G174	R75-6661	G173	S95-Y001	G185		
GBS15-1136-Q	G164	P30-4770	G174	R75-6662	G173	S95-Y001-KEY	G186		
GBS15-1136-QP	G164	P30-4771	G174	R76-1000	G173	S95-Y002	G186		
GBS15-1142-Q	G164	P30-4772	G174	S10-0014	G179	S95-Y002-KEY	G194		
GBS15-1142-QP	G164	P30-4780	G174	S10-0018	G179	SE90-0015	G184		
GBS15-1148-Q	G164	P40-1010	G166	S10-0020	G179	SE90-0015-C-N	G184		
GBS15-1148-QP	G164	P44-1010	G167	S10-0022	G179	SE90-0015-N	G184		
GBS15-4112-Q	G164	P45-3010	G167	S10-0024	G179	SE90-0020	G184		
GBS15-4116-Q	G164	P45-3510	G167	S10-0026	G179	SE90-0020-C-N	G184		

G

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
A16-0206-C	H201	J33-1532	H205	WS1224SS	H203				
A24-0206-C	H201	J52-0014	H202	WS1236SS	H203				
A24-0207-C	H202	J52-1250	H202	WS1248SS	H203				
B29-0080	H209	J53-0125	H202	WS1260SS	H203				
B70-1001	H198	J54-1580	H202	WS1272SS	H203				
B70-1001-6	H198	J54-1583	H202	WS1224SS-PR	H203				
B70-1002	H198	J57-7100	H202	WS1236SS-PR	H203				
B70-1003	H198	J57-7125	H202	WS1248SS-PR	H203				
B70-1005	H198	J57-7150	H202	WS1260SS-PR	H203				
B70-1007	H198	J57-7158	H202	WS1272SS-PR	H203				
B70-1008	H198	J58-0014	H202						
B74-0011	H198	J58-0100	H202						
B79-1000	H198	J58-0158	H202						
B79-1038	H198	J60-2240	H200						
B79-2000-L	H198	J60-2260	H200						
B79-2000-R	H198	J60-2270	H200						
B79-2038-L	H198	J62-0012	H200						
B79-2038-R	H198	J63-1451	H199						
B79-X014	H198	J63-1451-8	H199						
B80-0716	H209	J63-1451-9	H199						
IR-0031	H209	J63-1451-10	H199						
IR-0312RD	H209	J63-1651-84	H199						
IR-0312HX	H209	J63-1651-120	H199						
IR-0375HX	H209	J63-2651-78	H199						
IR-1061	H209	J63-2651-120	H199						
IR-1190	H209	J64-1450	H199						
IR-2112	H209	J64-1450-8	H199						
IR-2263	H209	J64-1450-9	H199						
J12-1402	H194	J64-1450-10	H199						
J12-1601	H194	J64-1651-78	H199						
J13-4488	H194	J64-1651-120	H199						
J14-0117	H194	J64-2651-84	H199						
J14-0119	H194	J64-2651-120	H199						
J16-0100	H194, H205	J65-4110	H199						
J16-0158	H194, H205	J70-4691	H207						
J16-0158-SPSS	H194, H205	J70-4701	H207						
J16-0201	H194, H205	J70-4801	H207						
J16-0201-SPSS	H205	J72-4711	H207						
J16-1000-RD	H205	J72-4731	H207						
J16-1000-SQ	H205	J74-4721	H207						
J16-1001-SQ	H205	J74-4723	H207						
J16-1250-RD	H205	J74-4725	H207						
J16-1250-SQ	H205	J74-4730	H207						
J16-1500-RD	H205	J77-4401	H201, H203						
J16-1500-SQ	H205	J77-4420	H201						
J16-1625-RD	H205	J79-4115	H201, H203						
J16-2125-RD	H205	J80-5107-6-C	H204						
J17-4270	H196	J80-5109-6-C	H204						
J17-4273	H196	J81-5206-6-C	H204						
J18-2000	H196	J81-5207-6-C	H204						
J19-1400	H194	J81-5209-6-C	H204						
J19-4955	H194, H196	J86-4300	H204						
J19-4960	H194, H195	J86-4301	H204						
J19-4960-LT	H195	J92-1000	H206						
J19-4962	H195	J92-5000	H206						
J19-4964	H195	J92-9360	H206						
J19-4966	H195	K22-3100	H206						
J19-4967	H196	K30-1000	H206						
J19-5000	H196	K30-1010	H206						
J25-2100	H197	Q85-2004	H208						
J25-2200	H197	Q85-2016	H208						
J25-2300	H197	Q85-7000	H208						
J29-4482	H197	Q85-7500	H208						
J30-4465	H197	Q85-8000	H208						
J32-X001	H205	Q85-8500	H208						
J32-X002	H205	T80-0485	H208						

Highlighted Models
Are Our Top Sellers

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
FRY90-1000	I223								
G10-6550	I213								
G12-6550	I213								
G12-X001	I213								
G22-4310	I213								
G22-4320	I213								
G27-1250	I213								
G28-6491	I214								
G30-6480	I214								
G32-6470	I214								
G34-6460	I214								
G36-4370	I214								
G38-5330	I214								
G40-6451	I214								
G40-6452	I214								
G44-4360	I214								
G46-4360	I214								
G46-4361	I214								
G48-0005	I214								
G50-5420	I214								
M23-5000	I215								
R35-3105-X	I215								
R42-2800	I215								
R42-2843	I215								
S82-1220	I215								
S82-1220-DR	I215								
S82-1220-DRA	I215								
S82-1220-SPSS	I215								

Highlighted Models
Are Our Top Sellers

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
1902-6-32	J224	M90-1016	J218	Q91-3505	J223				
1902-8-32	J224	M90-1018	J218	Q99-1000	J218				
1902-10-24	J224	M90-5012	J218	QBC-0716	J220				
1902-10-32	J224	MK-1600-E	J232	QBC-1024	J220				
1902-1/4-20	J224	MK-1800-E	J232	QIC-1024	J220				
1904-6-32	J224	MK-3320-E	J232	QIC-1420	J220				
1904-8-32	J224	Q31-1024	J219	QOR-0716	J220				
1904-10-24	J224	Q31-1420	J219	QOR-1024	J220				
1904-10-32	J224	Q32-1024	J219	QOR-1420	J220				
1904-1/4-20	J224	Q32-1420	J219	QTC-0716	J220				
AC-2226	J222	Q33-1024	J219	QTC-1024	J220				
AC-3011	J222	Q33-2024	J219	QTC-1420	J220				
AC-3014	J222	Q34-1024	J219	SG55-1000	J228				
AC-3015	J222	Q34-2024	J219	SG55-2000	J228				
AC-3018	J222	Q36-0001	J220	Highlighted Models Are Our Top Sellers					
AC-3019	J222	Q36-0028	J220						
AC-3022	J222	Q36-1010	J219						
AC-3718	J222	Q36-1012	J219						
ACD-8100	J221	Q36-1013	J219						
ACD-8102	J221	Q36-1014	J219						
ACD-8104	J221	Q36-1018	J219						
AK-4036	J221	Q36-1110	J219						
AK-4060	J221	Q36-1112	J219						
AK-4080	J221	Q36-1113	J219						
AK-4120	J221	Q36-1114	J219						
AK-5036	J221	Q36-1116	J219						
AK-5060	J221	Q36-1310	J219						
AK-5080	J221	Q36-1312	J219						
AK-5100	J221	Q36-1314	J219						
AK-5120	J221	Q36-1316	J219						
AK-7080	J221	Q36-1410	J219						
AK-7100	J221	Q36-1412	J219						
AK-7120	J221	Q36-1414	J219						
AK-7440-AP	J221	Q36-1416	J219						
AK-7446-AP	J221	Q36-X100	J220						
AK-7447-AP	J221	Q37-0250	J219						
AK-7448-AP	J221	Q37-1412	J219						
AK-7486-AP	J221	Q37-3162	J219						
AK-7496-AP	J221	Q45-4200	J219						
AN-5080	J221	Q45-4300	J219						
AN-7080	J221	Q45-4400	J219						
AQ-7401	J222	Q45-4600	J219						
AQ-7402	J222	Q45-4800	J219						
AQ-7405	J222	Q58-0001	J223						
AQ-7408	J222	Q59-1500	J223						
AQ-7409	J222	Q59-4440	J223						
AQ-7411	J222	Q75-1366	J218						
AQ-7413	J222	Q75-1366-DR	J218						
AZ-95016	J221	Q76-1250	J227						
AZ-95018	J221	Q77-1000	J218						
DBR-1000	J223	Q77-1240	J218						
DBR-1000-RR	J223	Q77-1250	J218						
DBR-1000-RS	J223	Q77-1260	J218						
FR-1218	J224	Q80-4000	J227						
FR-1224	J224	Q80-6000	J227						
FR-88162	J224	Q85-1010	J217						
FR-88163	J224	Q85-1012	J217						
FR-88178	J224	Q85-2004	J217						
FR-88179	J224	Q85-2016	J217						
M90-0310	J218	Q85-5225	J227						
M90-0312	J218	Q85-7000	J217						
M90-0314	J218	Q85-7500	J217						
M90-0318	J218	Q85-8000	J217						
M90-1010	J218	Q85-8500	J217						
M90-1012	J218	Q90-2126	J223						
M90-1014	J218	Q91-3503	J223						

Alphanumeric Index

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
0-516	B62	A10-0831-C	E115, E136	A46-6080-C	E128	AC-3018	J222	B10-X009	G196
1094	B61	A10-0841-C	E115, E136	A46-6160-C	E128	AC-3019	J222	B10-X012	G190
1902-6-32	J224	A10-0851-C	E115, E136	A46-6272-C	E128	AC-3022	J222	B10-X013	G190
1902-8-32	J224	A10-0852-C	E115, E136	A46-6288-C	E128	AC-3718	J222	B13-1010	G190
1902-10-24	J224	A10-0852-S	E122	A47-9932-C	E120	ACC-10X6	A29	B14-1010	G190
1902-10-32	J224	A10-0853-C	E125, E136	A48-5032-C	E124	ACC-12X8	A29	B20-1013	G188, G189
1902-1/4-20	J224	A10-0854-C	E125, E136	A48-5048-C	E124	ACC-18X14	A29	B20-1019	G188, G189
1904-6-32	J224	A10-0881-C	E117, E136	A50-5032-C	E124	ACD-8100	J221	B20-1028	G188, G189
1904-8-32	J224	A10-0884-C	E117, E136	A50-5048-C	E124	ACD-8102	J221	B20-1032	G188, G189
1904-10-24	J224	A10-1000	E116	A50-9704-C	E124	ACD-8104	J221	B20-1219	G188, G188
1904-10-32	J224	A10-1500	E116	A50-9939-C	E120	AE41-4002-C	E130	B20-1230	G188, G189
1904-1/4-20	J224	A10-9904-C	E119	A52-9907-C	E123	AE60-1453	E130	B20-1819	G188, G189
20-001	B62	A11-0851-C	E115	A60-0431	E131	AE60-1653	E130	B23-1013	G188, G189
301616	A18	A11-0854-C	E119	A60-0441	E131	AE60-X010	E130	B24-1013	G188, G189
301620	A18	A14-0221-C	E118	A60-0623	E131	AE61-2003-C	E122	B25-1810	G191
301625	A18	A14-0224-C	E119	A60-0631	E131	AE61-2104-C	E122	B29-0080	H209
302016	A18	A14-0411-C	E118	A60-0633	E131	AE61-4002-C	E122	B30-1013	G188
302020	A18	A14-0421-C	E118	A60-0641	E131	AE61-5002-C	E122	B30-1034	G188
302025	A18	A14-0424-C	E119	A60-1438	E132	AE62-2104-C	E122	B30-1210	G188
5270	B61	A14-0611-C	E118	A60-1651	E131	AE62-4002-C	E122	B30-X003	G188
5804	B62	A14-0651-C	E118	A60-1653	E131	AE62-5002-C	E122	B30-X004	G188
6601-B	B62	A14-0653-C	E119	A60-1653-SP1	E131	AE63-2003-C	E122	B30-X008	G188
6601	B62	A14-0654-C	E125	A60-1653-SP2	E131	AE63-2104-C	E122	B33-1010	G190
6449	B61	A15-0851-C	E118	A60-1653-SP3	E131	AE63-4002-C	E122	B33-1016	G190
750002	A29	A15-0854-C	E119	A60-1653-SP4	E131	AE63-5002-C	E122	B34-1010	G190
750505-C	A31	A16-0206-C	E114, H201	A60-2105	E132	AK-4036	J221	B34-1016	G190
750511-C	A31	A24-0206-C	H201	A60-2205	E132	AK-4060	J221	B40-1240	G190
750517-C	A31	A24-0207-C	H202	A60-2210	E132	AK-4080	J221	B56-1096	G192
750606	A34	A18-0202-C	E114	A60-2305	E132	AK-4120	J221	B57-0048	G192
750710	A30	A18-0203-C	E114	A60-2405	E132	AK-5036	J221	B57-0060	G192
750715	A30	A18-0206-C	E114	A60-2724	E143	AK-5060	J221	B57-0072	G192
750723	A30	A18-0306-C	E114	A60-4444	E143	AK-5080	J221	B57-0120	G192
750707	A30	A18-0402-C	E114	A60-X001	E131	AK-5100	J221	B57-0144	G192
750712	A30	A18-0406-C	E114	A60-X003	E131	AK-5120	J221	B58-5511	G192
750720	A30	A18-9900-C	E114	A70-1000	E133	AK-7080	J221	B58-5513	G192
750808-C	A31	A18-X001	E113, E114	A70-1010	E133	AK-7100	J221	B58-5521	G192
750811-C	A31	A19-1000	E113	A70-1010-M	E133	AK-7120	J221	B58-5523	G192
750817-C	A31	A20-0206-C	E114	A70-1020	E133	AK-7440-AP	J221	B60-1086	G192
750823-C	A31	A20-0406-C	E114	A70-1020-GL	E133	AK-7446-AP	J221	B62-1093	G192
751117-C	A31	A24-0206-C	E113	A70-2000	E133	AK-7447-AP	J221	B70-1001	H198
751123-C	A31	A24-0207-C	E113	A70-2010	E133	AK-7448-AP	J221	B70-1001-6	H198
751212	A30	A26-0207-C	E113	A70-2010-M	E133	AK-7486-AP	J221	B70-1002	H198
751220	A30	A28-0207-C	E113	A70-2020	E133	AK-7496-AP	J221	B70-1003	H198
751620	A30	A35-1010	E135	A70-X011	E133	AN-5080	J221	B70-1005	H198
751717-C	A31	A35-1010-SS	E135	A71-1020	E133	AN-7080	J221	B70-1007	H198
751723-C	A31	A35-1020	E135	A72-0811	E123	AP61-4003-C	E121	B70-1008	H198
752020	A34	A35-1020-SS	E135	A76-4460	E143	AP62-4003-C	E121	B74-0011	H198
760804-D14	A29	A35-1025-SS	E135	A77-5048-C	E123	AP63-2003-C	E121	B79-1000	H198
90VML-20X4	A26	A35-1030	E135	A78-5048-C	E123	AP63-4003-C	E121	B79-1038	H198
90VML-24X4	A26	A35-2010	E135	A79-5048-C	E123	AP64-4003-C	E121	B79-2000-L	H198
90VML-24X6	A26	A35-2020	E135	A84-5048-C	E124	AQ-7401	J222	B79-2000-R	H198
90VML-24X8	A26	A35-2030	E135	A85-9706-C	E124	AQ-7402	J222	B79-2038-L	H198
90VML-24X10	A26	A37-1010	E134	A86-5048-C	E124	AQ-7405	J222	B79-2038-R	H198
90VML-24X12	A26	A37-1020	E134	A88-9902-C	E120	AQ-7408	J222	B79-X014	H198
90VML-30X6	A26	A37-2010	E134	A90-9902-C	E120	AQ-7409	J222	B80-0716	H209
90VML-36X6	A26	A37-2020	E134	A92-8048-C	E126	AQ-7411	J222	C11-1020	F148
A10-0010-C	E115, E116, E117	A44-X301-C	E134	A93-8048-C	E126	AQ-7413	J222	C11-1030	F148
		A44-X309-C	E134	A95-8048-C	E126	AZ-95016	J221	C11-1031	F148
A10-0221-C	E115	A44-X327-C	E134	A99-9906-C	E127	AZ-95018	J221	C11-1040	F148
A10-0421-C	E115	A44-X341-C	E134	A99-9940-C	E130	B10-1013	G188	C11-1041	F148
A10-0611-C	E115	A46-4048-C	E128	AB48-5048-C	E125	B10-1016	G188	C11-1050	F148
A10-0631-C	E115	A46-4080-C	E128	AB84-5048-C	E125	B10-1025	G188	C11-1051	F148
A10-0641-C	E115	A46-4160-C	E128	AC-2226	J222	B10-1034	G188	C11-2030	F148
A10-0651-C	E115	A46-4272-C	E128	AC-3011	J222	B10-1822	G188	C11-2031	F148
A10-0654-C	E119	A46-4288-C	E128	AC-3014	J222	B10-X004	G196	C11-2040	F148
A10-0811-C	E115, E145	A46-6048-C	E128	AC-3015	J222	B10-X008	G196	C11-2041	F148

Alphanumeric Index

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
C11-2050	F148	C21-1036	F150	C23-2536	F151	C99-1030	F153	CMS1-4PBB	F147
C11-2051	F148	C21-1050	F150	C23-2550	F151	C99-1031	F153	CMS1-4PPB	F147
C11-3041	F148	C21-1050-R	F150	C23-2550-SS	F153	C99-1050	F153	CMS1-4RBB	F147
C13-1140	F149	C21-1051	F150	C23-2551	F151	C99-1051	F153	CMS1-4RPB	F147
C13-1141	F149	C21-2035	F150	C23-2551-SS	F153	CLP2-3BBN	F143	CMS1-5BBN	F146
C13-1150	F149	C21-2035-R	F150	C23-3135	F151	CLP2-3BPN	F143	CMS1-5BPN	F146
C13-1151	F149	C21-2036	F150	C23-3136	F151	CMP1-35KBN	F142	CMS1-5KBN	F146
C13-1240	F149	C21-2050	F150	C23-3150	F151	CMP1-35KPN	F142	CMS1-5KPN	F146
C13-1241	F149	C21-2050-R	F150	C23-3150-SS	F153	CMP1-3BBN	F142	CMS1-5PBB	F147
C13-1250	F149	C21-2050-SS	F153	C23-3151	F151	CMP1-3BPN	F142	CMS1-5PPB	F147
C13-1251	F149	C21-2051	F150	C23-3151-SS	F153	CMP1-3KBN	F142	CMS1-5PPB-TB	F147
C13-1330	F149	C21-2051-SS	F153	C23-3235	F151	CMP1-3KPN	F142	CMS1-5RBB	F147
C13-1331	F149	C21-3035	F149	C23-3236	F151	CMP1-3PBB	F142	CMS1-5RPB	F147
C13-1340	F149	C21-3036	F149	C23-3250	F151	CMP1-3PPB	F142	CMS2-3BBN	F146
C13-1350	F149	C21-3040	F149	C23-3251	F151	CMP1-4BBN	F142	CMS2-3BPN	F146
C13-1351	F149	C21-3041	F149	C23-3335	F151	CMP1-4BPN	F142	CMS2-3PBB	F147
C13-1440	F149	C21-3050	F149	C23-3336	F151	CMP1-4KBN	F142	CMS2-3PPB	F147
C13-1450	F149	C21-3051	F149	C23-3350	F151	CMP1-4KPN	F142	CMS2-35KBN	F152
C13-1451	F149	C23-1135	F151	C23-3351	F151	CMP1-4PBB	F142	CMS2-35KPN	F152
C13-1540	F149	C23-1136	F151	C23-3435	F151	CMP1-4PPB	F142	CMS2-4BBN	F146
C13-1541	F149	C23-1150	F151	C23-3436	F151	CMP1-4RBB	F142	CMS2-4BPN	F146
C13-1550	F149	C23-1151	F151	C23-3450	F151	CMP1-4RPB	F142	CMS2-4KBN	F146
C13-1551	F149	C23-1150-R	F152	C23-3451	F151	CMP1-5BBN	F142	CMS2-4KPN	F146
C13-2140	F149	C23-1235	F151	C23-3535	F151	CMP1-5BPN	F142	CMS2-4PBB	F147
C13-2141	F149	C23-1236	F151	C23-3536	F151	CMP1-5KBN	F142	CMS2-4PPB	F147
C13-2150	F149	C23-1250	F151	C23-3550	F151	CMP1-5KPN	F142	CMS2-4RBB	F147
C13-2151	F149	C23-1251	F151	C23-3551	F151	CMP1-5PBB	F142	CMS2-4RPB	F147
C13-2240	F149	C23-1335	F151	C25-1000	F160	CMP1-5PPB	F142	CMS2-5BBN	F146
C13-2241	F149	C23-1336	F151	C25-1001	F154	CMP1-5RBB	F142	CMS2-5BPN	F146
C13-2250	F149	C23-1350	F151	C31-2050	F154	CMP1-5RBB-TB	F142	CMS2-5KBN	F146
C13-2251	F149	C23-1351	F151	C31-2051	F154	CMP1-5RPB	F142	CMS2-5KPN	F146
C13-2340	F149	C23-1350-R	F152	C31-2060	F154	CMP1-5RPB-B	F142	CMS2-5PBB	F147
C13-2341	F149	C23-1435	F151	C31-2061	F154	CMP4-5BBB	F142	CMS2-5PPB	F147
C13-2350	F149	C23-1436	F151	C31-2080	F154	CMP4-5BPB	F142	CMS2-5RBB	F147
C13-2351	F149	C23-1450	F151	C31-2081	F154	CMP4U-5PBB	F142	CMS2-5RBB-TB	F147
C13-2440	F149	C23-1451	F151	C47-0306-C	F155	CMP4U-5PPB	F142	CMS2-5RPB	F147
C13-2441	F149	C23-1450-R	F152	C47-0316-C	F155	CMPU-5BBN	F142	CMS3-3BBN	F146
C13-2450	F149	C23-1535	F151	C48-03185-C	F155	CMPU-5BPN	F142	CMS3-3BPN	F146
C13-2451	F149	C23-1536	F151	C47-0406-C	F155	CMPU-5KBN	F142	CMS3-3PBB	F147
C13-2540	F149	C23-1550	F151	C47-0416-C	F155	CMPU-5KPN	F142	CMS3-3PPB	F147
C13-2541	F149	C23-1551	F151	C47-0506	F155	CMPU-5PBB	F142	CMS3-35KBN	F152
C13-2550	F149	C23-2135	F151	C47-0516	F155	CMPU-5PPB	F142	CMS3-35KPN	F152
C13-2551	F149	C23-2136	F151	C50-0406-C	F155	CMPU-5RBB	F142	CMS3-4BBN	F146
C13-3140	F149	C23-2150	F151	C50-0416-C	F155	CMPU-5RPB	F142	CMS3-4BPN	F146
C13-3141	F149	C23-2150-SS	F153	C50-0506-C	F155	CMR1-3BPN	F143	CMS3-4KBN	F146
C13-3150	F149	C23-2151	F151	C50-0516-C	F155	CMR1-3KPN	F143	CMS3-4KPN	F146
C13-3151	F149	C23-2151-SS	F153	C60-1010	F157	CMR1-3PPB	F143	CMS3-4PBB	F147
C13-3240	F149	C23-2235	F151	C60-1010-SR	F157	CMR1-4BPN	F143	CMS3-4PPB	F147
C13-3241	F149	C23-2236	F151	C60-1012	F157	CMR1-4KPN	F143	CMS3-4RBB	F147
C13-3250	F149	C23-2250	F151	C60-1020	F157	CMR1-4PPB	F143	CMS3-4RPB	F147
C13-3251	F149	C23-2250-SS	F153	C60-1030	F157	CMR1-4RPB	F143	CMS3-5BBN	F146
C13-3340	F149	C23-2251	F151	C60-1040	F157	CMR1-5BPN	F143	CMS3-5BPN	F146
C13-3341	F149	C23-2251-SS	F153	C60-1040-B	F157	CMR1-5KPN	F143	CMS3-5PBB	F147
C13-3350	F149	C23-2335	F151	C60-1050	F157	CMR1-5PPB	F143	CMS3-5PPB	F147
C13-3440	F149	C23-2336	F151	C60-1050-B	F157	CMR1-5RPB	F143	CMS3-5RBB	F147
C13-3441	F149	C23-2350	F151	C60-5010	F157	CMS1-35KBN	F152	CMS3-5RBB-TB	F157
C13-3450	F149	C23-2350-SS	F153	C60-X100-B	F157	CMS1-35KPN	F152	CMS3-5RPB	F157
C13-3451	F149	C23-2351	F151	C65-1010	F156	CMS1-3BBN	F146	CMS4-35KBN	F146
C13-3540	F149	C23-2351-SS	F153	C65-2072	F156	CMS1-3BPN	F146	CMS4-35KPN	F146
C13-3541	F149	C23-2435	F151	C65-2120	F156	CMS1-3PBB	F147	CMS4-3BBN	F156
C13-3550	F149	C23-2436	F151	C65-5000	F156	CMS1-3PPB	F147	CMS4-3BPN	F156
C13-3551	F149	C23-2450	F151	C65-5090	F156	CMS1-35KBN	F152	CMS4-3KBN	F156
C13-5430	F149	C23-2450-SS	F153	C83-0506	F155	CMS1-35KPN	F152	CMS4-3KPN	F156
C13-5431	F149	C23-2451	F151	C83-0516	F155	CMS1-4BBN	F146	CMS4-3PBB	F157
C21-1035	F150	C23-2451-SS	F153	C86-0506	F155	CMS1-4BPN	F146	CMS4-3PPB	F157
C21-1035-R	F150	C23-2535	F151	C86-0516-C	F155	CMS1-4KBN	F146	CMS4-4BBN	F156

Alphanumeric Index

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
CMS4-4BBNS	F156	CMT2-3PPB	F145	CSTPK-5PUUP-4B	F141	FA51-2520	A20	GBS15-1136-Q	G164
CMS4-4BPN	F156	CMT2-5BBN	F145	CSTPK-5PUUP-B	F141	FG51-1020	A20	GBS15-1136-QP	G164
CMS4-4BPNS	F156	CMT2-5BPN	F145	CSTPK-5RES	F141	FG51-1220	A20	GBS15-1142-Q	G164
CMS4-4KBN	F156	CMT2-5PBB	F145	CSTPK-5RES-3	F141	FG51-1616	A20	GBS15-1142-QP	G164
CMS4-4KPN	F156	CMT2-5PPB	F145	CSTPK-5RSP	F141	FG51-1620	A20	GBS15-1148-Q	G164
CMS4-4PBB	F157	CMT2-5RBB	F145	CSTPK-5RSP-T1	F141	FG51-1625	A20	GBS15-1148-QP	G164
CMS4-4PPB	F157	CMT2-5RPB	F145	CSTPK-5RTS-1	F141	FG51-2016	A20	GBS15-4112-Q	G164
CMS4-4RBB	F157	CMT3-5BBN	F145	CSTPK-5RUP	F141	FG51-2020	A20	GBS15-4116-Q	G164
CMS4-4RPB	F157	CMT3-5BPN	F145	CSTPK-6PBB	F141	FG51-2025	A20	GBS15-4118-Q	G164
CMS4-5BBN	F156	CMT4-3BBN	F145	CTB-1500	F139	FG51-2516	A20	GBS15-4124-Q	G164
CMS4-5BBN-TB	F156	CMT4-5PBB	F145	CD-1000	G194	FG51-2520	A20	GBS15-4130-Q	G164
CMS4-5BPN	F156	CMT4-5PPB	F145	CD-Y004	G194	FG74-0506	A26	GBS15-413030Q	G164
CMS4-5KBN	F156	CMT5-5BBN	F145	DBR-1000	J223	FG99-0005	A26	GBS15-4132-Q	G164
CMS4-5KPN	F156	CMT5-5BPN	F145	DBR-1000-RR	J223	FIP-PANEL FASTENERS	C92	GBS15-4136-Q	G164
CMS4-5PBB	F157	CMT5-5PBB	F145	DBR-1000-RS	J223	FR-1218	J224	GBS15-414030Q	G164
CMS4-5PBB-TB	F147	CMT5-5PPB	F145	EFI-SQL	A28	FR-1224	J224	GBS15-4142-Q	G164
CMS4-5PBB-SS	F157	CMT5-5RBB	F145	EFI-SQS	A28	FR-88162	J224	GFK-6449-C	B63
CMS4-5PPB	F157	CMT5-5RPB	F145	EFI-UB	A28	FR-88163	J224	GFK-6449-S	B63
CMS4-5PPB-SS	F157	CSTPK-1PUP-4B	F140	F10-1187	A23	FR-88178	J224	Hinge Selector Guide	B40
CMS4-5RBB	F157	CSTPK-2PUP-4B	F140	F11-004	A25	FR-88179	J224	HINGE SELECTOR	C71
CMS4-5RBB-TB	F157	CSTPK-2PUTS-B	F140	F11-0012	A24	FR51-1016	A20	IR-0031	G191, H209
CMS4-5RPB	F157	CSTPK-3BTS	F140	F11-0014	A24	FR51-1020	A20	IR-0312RD	H209
CMS5-35KBN	F146	CSTPK-3BTS-7B	F140	F11-0034	A24	FR51-1216	A20	IR-0312HX	H209
CMS5-35KPN	F146	CSTPK-3BTS-B	F140	F11-0038	A24	FR51-1220	A20	IR-0375HX	H209
CMS5-3BBN	F156	CSTPK-3PAL	F140	F11-0100	A24	FR51-1616	A20	IR-1061	G191, H209
CMS5-3BPN	F156	CSTPK-3PAL-1	F140	F11-0112	A24	FR51-1620	A20	IR-1190	H209
CMS5-3PBB	F157	CSTPK-3PES	F140	F11-0012A	A24	FR51-1625	A20	IR-2112	G191, H209
CMS5-3PPB	F157	CSTPK-3PRS	F140	F11-0012B	A24	FR51-2016	A20	IR-2263	G191, H209
CMS5-4BBN	F156	CSTPK-3PSP	F140	F11-0114	A24	FR51-2020	A20	J12-1402	H194
CMS5-4BPN	F156	CSTPK-3PUES-3	F140	F12-0034	A25	FR51-2025	A20	J12-1601	H194
CMS5-4PBB	F157	CSTPK-3PUES-3B	F140	F12-0078	A25	FR51-2516	A20	J13-4488	H194
CMS5-4PPB	F157	CSTPK-3PUES-4	F140	F12-0118	A25	FR51-2520	A20	J14-0117	H194
CMS5-4RBB	F157	CSTPK-3PUES-4B	F140	F12-0138	A25	FR51-X015	A19	J14-0119	H194
CMS5-4RPB	F157	CSTPK-3PUUP-B	F140	F12-0158	A25	FRY90-1000	I223	J16-0100	H194, H205
CMS5-5BBN	F156	CSTPK-3PUUP-4B	F140	F15-0019	A23	G10-6550	I213	J16-0158	H194, H205
CMS5-5BPN	F156	CSTPK-4PBB	F140	F15-250T	A25	G12-6550	I213	J16-0158-SPSS	H194, H205
CMS5-5PBB	F157	CSTPK-4PSP	F140	F15-375T	A25	G12-X001	I213	J16-0201	H194, H205
CMS5-5PPB	F157	CSTPK-4PUTS-1B	F140	F15-500EMT	A25	G22-4310	I213	J16-0201-SPSS	H205
CMS5-5RBB	F157	CSTPK-4RES	F140	F15-500P	A25	G22-4320	I213	J16-1000-RD	H205
CMS5-5RBB-TB	F157	CSTPK-5BTS	F140	F15-500T250P	A25	G27-1250	I213	J16-1000-SQ	H205
CMS5-5RPB	F147	CSTPK-5BUP	F140	F15-625T375P	A25	G28-6491	I214	J16-1001-SQ	H205
CMT1-3BBN	F147	CSTPK-5PES	F140	F15-750P	A25	G30-6480	I214	J16-1250-RD	H205
CMT1-3BPN	F145	CSTPK-5PES-1	F140	F15-1000P	A25	G32-6470	I214	J16-1250-SQ	H205
CMT1-3KBN	F145	CSTPK-5PES-2	F140	F15-2500-C	A23	G34-6460	I214	J16-1500-RD	H205
CMT1-3KPN	F145	CSTPK-5PES-3	F140	F15-4000-C	A23	G36-4370	I214	J16-1500-SQ	H205
CMT1-3PBB	F145	CSTPK-5PES-4B-6	F140	F40-1020	A21	G38-5330	I214	J16-1625-RD	H205
CMT1-3PPB	F145	CSTPK-5PFC-B	F141	F40-1620	A21	G40-6451	I214	J16-2125-RD	H205
CMT1-4BBN	F145	CSTPK-5PUS	F141	F40-1625	A21	G40-6452	I214	J17-4270	H196
CMT1-4BPN	F145	CSTPK-5PRS-B	F141	F40-2020	A21	G44-4360	I214	J17-4273	H196
CMT1-4KBN	F145	CSTPK-5PRS-SP1	F141	F40-2025	A21	G46-4360	I214	J18-2000	H196
CMT1-4KPN	F145	CSTPK-5PSP	F141	F41-0001	A21	G46-4361	I214	J19-1400	H194
CMT1-4PBB	F145	CSTPK-5PTS	F141	F41-1020	A21	G48-0005	I214	J19-4955	H194, H196
CMT1-4PPB	F145	CSTPK-5PUES-3B	F141	F41-1620	A21	G50-5420	I214	J19-4960	H194, H195
CMT1-4RBB	F145	CSTPK-5PUES-4B	F141	F41-1625	A21	GBS15-1112-Q	G164	J19-4960-LT	H195
CMT1-4RPB	F145	CSTPK-5PUES-4B-6	F141	F41-2020	A21	GBS15-1112-QP	G164	J19-4962	H195
CMT1-5BBN	F145	CSTPK-5PUP	F141	F41-2025	A21	GBS15-1116-Q	G164	J19-4964	H195
CMT1-5BPN	F145	CSTPK-5PUP-4	F141	FA51-1016	A20	GBS15-1116-QP	G164	J19-4966	H195
CMT1-5KBN	F145	CSTPK-5PURS	F141	FA51-1020	A20	GBS15-1118-Q	G164	J19-4967	H196
CMT1-5KPN	F145	CSTPK-5PURS-B	F141	FA51-1216	A20	GBS15-1118-QP	G164	J19-5000	H196
CMT1-5PBB	F145	CSTPK-5PUSP	F141	FA51-1220	A20	GBS15-1124-Q	G164	J25-2100	H197
CMT1-5PPB	F145	CSTPK-5PUSP-B	F141	FA51-1616	A20	GBS15-1124-QP	G164	J25-2200	H197
CMT1-5RBB	F145	CSTPK-5PUTS-1B	F141	FA51-1620	A20	GBS15-1130-Q	G164	J25-2300	H197
CMT1-5RPB	F145	CSTPK-5PUTS-2B	F141	FA51-1625	A20	GBS15-1130-QP	G164	J29-4482	H197
CMT2-3BBN	F145	CSTPK-5PUTS-3B	F141	FA51-2016	A20	GBS15-113030Q	G164	J30-4465	H197
CMT2-3BPN	F145	CSTPK-5PUTS-4	F141	FA51-2020	A20	GBS15-1132-Q	G164	J32-X001	H205
CMT2-3PBB	F145	CSTPK-5PUUP	F141	FA51-2025	A20	GBS15-1132-QP	G164	J32-X002	H205

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
J33-1532	H205	L10-Y005	D101	LED-L87-1004-30W	D105	M22-2420	G177	P30-4780	G174
J52-0014	H202	L10-Y010	D101	LED-L87-1008-30N	D105	M22-2430	G177	P40-1010	B37, G166
J52-1250	H202	L10-Y016	D101	LED-L87-1008-30W	D105	M23-5000	I215	P44-1010	G167
J53-0125	H202	L20-1010	D102	LED-L87-1030N	D105	M24-2260	G177	P45-3010	G167
J54-1580	H202	L20-1010-CL	D100, D102	LED-L87-1030W	D105	M25-9469	G177	P45-3510	G167
J54-1583	H202	L20-1010-CSA	D102	LED-PK100DD-C	D100	M27-2490	G177	P45-4010	G167
J57-7100	H202	L20-1010-L07C	D100	LED-PK100DD-N	D100	M30-2400	G176	P46-1010	G167
J57-7125	H202	L20-1010-N	D100, D102	LED-PL35-W	D107	M30-5920	G176	P46-1012	G167
J57-7150	H202	L50-X009	D109	LED-RB08-DIM-x	D96	M32-2401	G176	P47-1012	G166
J57-7158	H202	L50-X011	D109	LED-RB12-DIM-x	D96	M35-1000	G176	P47-1018	G166
J58-0014	H202	L50-Y001	D109	LED-RB18-DIM-x	D96	M35-2000	G176	P48-1010	B37, G165
J58-0100	H202	L55-1004	D108	LED-RB24-DIM-x	D96	M36-0201	G176	P48-1012	B37, G165
J58-0158	H202	L55-1004-CSA	D108	LED-RB30-DIM-x	D96	M36-0611	G176	P48-X002	B37, G165
J62-0012	H200	L55-1004-HT	D108	LED-RB36-DIM-x	D96	M36-0801	G176	P49-1010	G166
J60-2220	C94	L55-1024	D108	LED-RB48-DIM-x	D96	M48-0112	G171	P49-1500	B37, G165
J60-2240	C94, H200	L55-1024-CSA	D108	LED-RB-X110	D96	M48-0121	G171	P49-1500-6	B37, G165
J60-2260	C94, H200	L55-1024-HT	D108	LED-RB-X112	D96	M48-0122	G171	P49-2100	G166
J60-2270	C94, H200	L55-2004	D108	LED-RB-X115	D96	M48-0131	G171	P49-2200	G166
J60-2320	C94	L55-2004-CSA	D108	LED-RB-X150	D96	M48-0132	G171	P50-1010	G167
J63-1451	A22, H199	L55-2004-HT	D108	LED-RB-X155	D96	M48-0134	G171	P50-1011	G167
J63-1451-8	A22, H199	L55-2024	D108	LED-RB-X160	D96	M48-0142	G171	P50-5000	G168
J63-1451-9	A22, H199	L55-2024-CSA	D108	LED-RB-X170	D96	M48-0143	G171	P51-1010	G167
J63-1451-10	A22, H199	L55-2024-HT	D108	LED-RB-X200	D96	M48-0144	G171	P51-1024	G167
J63-1651-84	A22, H199	L55-LEDN-1004	D107	LED-RB-X206	D96	M74-2078	G173	P52-1010	G167
J63-1651-120	A22, H199	L55-LEDN-1024	D107	LED-RB-X212	D96	M74-3078	G173	P53-1012	G167
J63-2651-78	A22, H199	L55-LEDN-2004	D107	LED-RB-X218	D96	M75-1002	G172	P60-1010	G168
J63-2651-120	A22, H199	L55-LEDN-2024	D107	LED-RB-X224	D96	M75-5003	G172	P62-1010	G168
J64-1450	A22, H199	L55-LEDW-1004	D107	LED-RB-X236	D96	M80-2500	G170	P62-1014	G168
J64-1450-8	A22, H199	L55-LEDW-1024	D107	LED-RB-X270	D96	M90-0310	A27, J218	P63-1012	G168
J64-1450-9	A22, H199	L55-LEDW-2004	D107	LED-RB-X300	D96	M90-0312	A27, J218	P68-1010	G170
J64-1450-10	A22, H199	L55-LEDW-2024	D107	LED-RB-X500	D96	M90-0314	A27, J218	P70-1010	G170
J64-1651-78	A22, H199	L55-X003	D109	LED-RB-X501	D96	M90-0318	J218	P73-1000	G168
J64-1651-120	A22, H199	L55-X003-HT	D109	LED-RR12-x	D97	M90-1010	A27, C94, J218	P73-2000	G168
J64-2651-84	A22, H199	L55-X006	D109	LED-RR18-x	D97	M90-1012	A27, C94, J218	P75-1000-Q	G163
J64-2651-120	A22, H199	L55-X022	D109	LED-RR20-x	D97	M90-1014	A27, J218	P75-5000	G163
J65-4110	H199	L55-Y001	D109	LED-RR30-x	D97	M90-1016	A27, J218	P80-3000	G166
J70-4691	H207	L55-Y001-CSA	D109	LED-RR35-x	D97	M90-1018	A27, J218	P80-3020	G166
J70-4701	H207	L55-Y001-HT	D109	LED-RR40-x	D97	M90-5012	A27	P80-3030	G166
J70-4801	H207	L82-1020	D106	LED-RR48-x	D97	MCD 116	A18	P88-1010	G178
J72-4711	H207	L82-1030	D106	LED-RR-X100	D97	MCD 116-1.5	A18	P90-1000	G169
J72-4731	H207	L82-1040	D106	LED-RR-X103	D97	MCD 120	A18	P90-2000	G169
J74-4721	H207	L82-Y001	D109	LED-RR-X112	D97	MCD 123	A18	P90-2000-C	G169
J74-4723	H207	L82-Y002	D109	LED-RR-X139	D97	MCD 126	A18	P90-5000	G169
J74-4725	H207	L82-Y003	D109	LED-RR-X201	D97	MCD 128	A18	P90-5000-C	G169
J74-4730	H207	L87-1004	D106	LED-RR-X202	D97	MCD 133	A18	P91-5000	G169
J77-4401	H201, H203	L87-Y001	D109	LED-RR-X203	D97	MCD 136	A18	P99-100SL-01	B55
J77-4420	H201	LED48X62221N	D98	LED-RR-X204	D97	MCD 139	A18	Q20-2081	G187
J79-4115	H201, H203	LED-212009C	D98	LED-RR-X302	D97	MK-1600-E	J232	Q20-2095	G187
J80-5107-6-C	H204	LED-40000N-B	D107	LED-RR-X303	D97	MK-1800-E	J232	Q21-5003	G187
J80-5109-6-C	H204	LED-40000N-P	D107	LED-RR-X304	D97	MK-3320-E	J232	Q21-5017	G187
J81-5206-6-C	H204	LED-40000W-B	D107	LED-RR-X305	D97	P10-0370	G175	Q24-0220	G187
J81-5207-6-C	H204	LED-40001N	D107	LED-RR-400	D97	P11-0480	G175	Q24-0225	G187
J81-5209-6-C	H204	LED-E26E17ADPT	D99	LED-RR-401	D97	P20-0490	G175	Q24-0230	G187
J86-4300	H204	LED-L80-15DN	D103	LED-RR-402	D97	P22-0006	G175	Q24-0320	G187
J86-4301	H204	LED-L80-15DW	D103	LED-TB40-T6-W	D99	P30-0802	B38, B40, B41, G174	Q24-0420	B60, G187
J92-1000	H206	LED-L80-20DN	D103	LED-TB40-T6A-W	D99			Q24-0520	B60, G187
J92-5000	H206	LED-L80-20DW	D103	LR58-1010	D110	P30-1000	G174	Q26-3062	G187
J92-9360	H206	LED-L82-1030-40N	D104	M10-8332	G170	P30-4750	G174	Q26-4071	G187
K22-3100	H206	LED-L82-1030-40W	D104	M10-8333	G170	P30-4751	G174	Q26-4072	G187
K30-1000	H206	LED-L82-1040-50N	D104	M11-8201	G170	P30-4752	G174	Q31-1024	J219
K30-1010	H206	LED-L82-1040-50W	D104	M12-9293	G173	P30-4760	G174	Q31-1420	J219
L10-X006	D107	LED-L82-RF1030-40N	D104	M12-9294	G173	P30-4761	G174	Q32-1024	J219
L10-X007	D101	LED-L82-RF1030-40W	D104	M12-9295	G173	P30-4762	G174	Q32-1420	J219
L10-X008	D101	LED-L82-RF1040-50N	D104	M15-9210	B43, G171	P30-4770	G174	Q33-1024	J219
L10-X020	D101, D115	LED-L82-RF1040-50W	D104	M15-9211	B43, G171	P30-4771	G174	Q33-2024	J219
L10-X026	D101	LED-L87-1004-30N	D105	M21-2580	G177	P30-4772	G174	Q34-1024	J219

Alphanumeric Index

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
Q34-2024	J219	QIC-1420	J220	R50-X003	B50	S15-1020	G181	SE90-0015-C-N	G184
Q36-0001	J220	QOR-0716	J220	R50-X003-SS	B50	S15-1022	G181	SE90-0015-N	G184
Q36-0028	J220	QOR-1024	J220	R50-X004	B50	S25-0014	G180	SE90-0020	G184
Q36-1010	J219	QOR-1420	J220	R50-X004-A	B50	S25-0016	G180	SE90-0020-C-N	G184
Q36-1012	J219	QTC-0716	J220	R50-X004-C	B50	S25-0018	G180	SE90-0020-N	G184
Q36-1013	J219	QTC-1024	J220	R50-X004-SS	B50	S25-0020	G180	SG-101	G163
Q36-1014	J219	QTC-1420	J220	R50-X004-SSA	B50	S25-0022	G180	SG55-1000	J228
Q36-1018	J219	R20-1010	B47	R50-X005	B50	S25-0024	G180	SG55-2000	J228
Q36-1110	J219	R20-1020	B47	R50-X005-SS	B50	S25-0026	G180	T10-3351	B60
Q36-1112	J219	R24-9175	B40	R51-2000	B49	S25-0028	G180	T12-0370	B56
Q36-1113	J219	R24-9175-C	B40	R51-2000-CS	B49	S25-2014	G180	T12-0370-P	B57
Q36-1114	J219	R24-9175-X	B40	R51-2000-RS	B49	S25-2016	G180	T12-0372	B56
Q36-1116	J219	R24-9175-XC	B40	R55-1010	C81	S25-2020	G180	T12-0372-CE	B56
Q36-1310	J219	R24-Y001	B40	R55-1020	C81	S25-2022	G180	T12-0372-CE48	B56
Q36-1312	J219	R25-1700-C	B41	R56-1010	B51	S25-2028	G180	T12-0372-CE84	B56
Q36-1314	J219	R25-1700-NC	B41	R56-5010	B51, B52	S26-0014	G179	T12-0372-P	B57
Q36-1316	J219	R25-1700-XNC	B41	R56-5011	B51, B52	S26-0016	G179	T12-3390	B56
Q36-1410	J219	R25-1700-XC	B41	R56-5016	B52	S26-0018	G179	T12-5000	B56
Q36-1412	J219	R25-X002	B41	R56-5017	B51, B52	S26-0020	G179	T12-5000-CSA	B56
Q36-1414	J219	R25-Y001	B41	R56-6010	B51, B52	S26-0022	G179	T12-5000-P	B57
Q36-1416	J219	R26-1000	B39	R56-6011	B52	S26-0026	G179	T12-5200	B56
Q36-X100	J220	R26-Y001	B39	R56-7010	B53	S26-Y001	G179, G191	T12-5200-CE	B56
Q37-0250	A23, J219	R27-1010-X	B42	R56-7011	B51, B53	S30-1020	G182	T12-5200-CE48	B56
Q37-1412	J219	R30-9140-FL	B43	R56-7014	B53	S30-2018	G182	T12-5200-CE84	B56
Q37-3162	J219	R30-9140-5/8	B43	R56-7015	B53	S30-2022	G182	T12-5200-CSA	B56
Q45-4200	J219	R35-1105	B38	R56-7040	B51, B53	S30-3022	G182	T12-5200-P	B57
Q45-4300	J219	R35-1105-C	B38	R56-7041	B53	S30-Y001	G182	T21-0024	B59
Q45-4400	J219	R35-1105-X	B38	R56-8010	B54	S35-1016	G181	T21-0036	B59
Q45-4600	J219	R35-1105-XC	B38	R56-8011	B54	S35-1018	G181	T21-0042	B59
Q45-4800	J219	R35-3105-X	E12, I215	R56-8040	B54	S35-1020	G181	T21-0048	B59
Q58-0001	J223	R35-Y001	B38	R56-8041	B54	S35-1022	G181	T21-0060	B59
Q59-1500	J223	R35-Y005	B38	R58-1020	D110	S35-1024	G181	T21-0072	B59
Q59-4440	J223	R42-2800	I215	R61-8410	D111	S35-1026	G181	T21-0144	B59
Q75-1366	J218	R42-2843	I215	R62-8406	D111	S52-0020	G178	T21-1024	B59
Q75-1366-DR	J218	R40-1010	B47	R69-1630	D111	S52-0022	G178	T21-1036	B59
Q76-1250	J227	R40-X002	B53	R70-0720	D111	S52-0024	G178	T21-1042	B59
Q77-1000	B60, J218	R40-X003	B53	R70-0723	D111	S52-0026	G178	T21-1048	B59
Q77-1240	B60, J218	R42-2000	B46	R71-0721	D111	S52-2020	G178	T21-1060	B59
Q77-1250	B60, J218	R42-2800	B45	R73-1210	D110	S52-2022	G178	T21-1072	B59
Q77-1260	B60, J218	R42-2801	B45	R73-1212	D110	S52-2024	G178	T21-1144	B59
Q80-4000	J227	R42-2810	B45	R73-2201	D110	S52-2026	G178	T22-0024	B59
Q80-6000	J227	R42-2840	B47	R73-2202	D110	S52-X001	G178, G191	T22-0036	B59
Q85-1010	J217	R42-2841	B45	R73-2203	D110	S52-X101	G178, G191	T22-0042	B59
Q85-1012	J217	R42-2842	B45	R74-8000-RH	G172	S80-1520	G183	T22-0048	B59
Q85-2004	H208, J217	R42-2842-BB	B45	R74-8001-LH	G172	S80-2020	G183	T22-0060	B59
Q85-2016	H208, J217	R42-2844	B46	R74-8100-RH	G172	S81-1520-C	G183	T22-0072	B59
Q85-7000	H208, J217	R42-2855	B46	R74-8101-LH	G172	S81-2020-C	G183	T22-0144	B59
Q85-7500	H208, J217	R42-2880	B44	R74-9000-RH	G172	S82-1220	I215	T22-1024	B59
Q85-8000	H208, J217	R42-2883	B44	R74-9001-LH	G172	S82-1220-DR	I215	T22-1036	B59
Q85-8500	H208, J217	R42-2890-K	B44	R75-6661	G173	S82-1220-DRA	I215	T22-1042	B59
Q86-0001	A27	R42-2893	B44	R75-6662	G173	S82-1220-SPSS	I215	T22-1048	B59
Q86-0010	A27	R42-X003	B50	R76-1000	G173	S90-0015	G184	T22-1060	B59
Q86-0015	A27	R42-X004	B50	R88-1000	B61	S90-0015-C-N	G184	T22-1072	B59
Q86-1000	A27	R42-X008	B50	R90-1002	B60	S90-0015-N	G184	T22-1144	B59
Q86-1250	A27	R42-X020	B50	RIGID RAIL-		S90-0020	G184	T23-0024	B59
Q86-1500	A27	R42-X021	B50	PANEL FASTENERS	C96	S90-0020-C-N	G184	T23-0036	B59
Q86-1625	A27	R42-X038	B50	SLAB FOAM-		S90-0020-N	G184	T23-0042	B59
Q86-2000	A27	R42-X103	B50	PANEL FASTENERS	C94	S90-X004	G186	T23-0048	B59
Q90-2126	J223	R45-1010	B48	S10-0014	G179	S90-X032	G184	T23-0060	B59
Q91-3503	J223	R45-X003	B50	S10-0018	G179	S90-X033	G184	T23-0072	B59
Q91-3505	J223	R45-X004	B50	S10-0020	G179	S95-1000	G185	T23-0144	B59
Q99-1000	A27, C94	R50-2850	B48	S10-0022	G179	S95-Y001	G185	T23-1024	B59
Q99-1000	B60, J218	R50-2850-NL	B48	S10-0024	G179	S95-Y001-KEY	G186	T23-1036	B59
QBC-0716	J220	R50-2850-SPO	B48	S10-0026	G179	S95-Y002	G186	T23-1042	B59
QBC-1024	J220	R50-2850-SS	B48	S10-Y001	G179, G191	S95-Y002-KEY	G194	T23-1048	B59
QIC-1024	J220	R50-2851	B48	S15-1016	G181	SE90-0015	G184	T23-1060	B59

MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.	MODEL NO.	PAGE NO.
T23-1072	B59	W27-5581	C93	W58-2200	C79	W59-4125	C80	W61-4037	C78
T23-1144	B59	W27-5600A	C93	W58-3000	C79	W59-4137	C80	W61-4112	C78
T30-5030	B59	W27-5600B	C93	W58-3012	C79	W59-4150	C80	W61-4125	C78
T30-5031	B59	W27-7300	C89	W58-3025	C79	W59-4162	C80	W61-4137	C78
T30-5032	B59	W27-7400	C89	W58-3037	C79	W59-4175	C80	W61-4150	C78
T30-5050	B59	W27-8801-SP	C89	W58-3112	C79	W59-4187	C80	W61-4162	C78
T30-5051	B59	W27-8801-SS	C89	W58-3125	C79	W59-4200	C80	W61-4175	C78
T30-5055	B59	W27-8800TT-SP	C89	W58-3137	C79	W60-1000	C76	W61-4187	C78
T30-5130	B59	W27-8800TT-SS	C89	W58-3150	C79	W60-1000-S	C76	W61-4200	C78
T30-5130-TAB	B59	W27-8803	C89	W58-3162	C79	W60-1012	C76	W62-0001	C77
T30-5131	B59	W27-8804	C89	W58-3175	C79	W60-1012-S	C76	W62-2001	C77
T30-9901-UT	B59	W28-1000	C72,C75	W58-3187	C79	W60-1025	C76	W77-1375	C77
T32-5020	B59	W28-1200	C72	W58-3200	C79	W60-1025-S	C76	W88-1010	C86
T34-1010	B59	W28-2300-SSX	C71, C75	W58-4000	C79	W60-1037	C76	W88-1012	C86
T42-3330	B63	W28-2325X	C71	W58-4012	C79	W60-1037-S	C76	W88-2010	C86
T54-0937	B64	W28-2400X	C71	W58-4025	C79	W60-1112	C76	W91-1414-HGHF	C87
T54-1500	B64	W28-2400-SSX	C71	W58-4037	C79	W60-1125	C76	W91-14143-UGUF	C87
T54-1750	B64	W28-2600X	C71	W58-4112	C79	W60-1137	C76	W91-1424-HGHF	C87
T54-2000	B64	W28-2605	C71	W58-4125	C79	W60-1150	C76	W91-14243-UGUF	C87
T54-2250	B64	W28-2800X	C71	W58-4137	C79	W60-1162	C76	W94-1010	C82
T54-2750	B64	W28-3400X	C71	W58-4150	C79	W60-1175	C76	W94-1020	C82
T54-3000	B64	W28-3800X	C71	W58-4162	C79	W60-1187	C76	W94-2010	C82
T55-0598	B64	W29-1000X	C68	W58-4175	C79	W60-1200	C76	W94-2020	C82
T55-20-010	B64	W29-2000	C68	W58-4187	C79	W60-2000	C76	W95-1010	C83
T55-20-011	B64	W29-5000-4X	C72	W58-4200	C79	W60-2025	C76	W95-1020	C83
T55-20-053	B64	W30-1000-L	C68	W59-1000	C80	W60-2112	C76	W95-1030	C83
T80-0485	H208	W30-2000-L	C68	W59-1012	C80	W60-2137	C76	W95-2010	C83
T90-330	B58	W31-1000X	C68	W59-1025	C80	W61-1000	C78	W95-2020	C83
T90-6142	B58	W38-1000	C70	W59-1037	C80	W61-1012	C78	W95-2030	C83
T90-6812	B58	W38-1000-C	C70,C75	W59-1112	C80	W61-1025	C78	W99-0100-H	C75
T90-330	C84	W38-1000-C-GE	C75	W59-1125	C80	W61-1037	C78	W99-0100-L	C75
T90-6142	C85	W38-1000-SN	C70	W59-1137	C80	W61-1112	C78	W99-2001	C75
T90-6812	C85	W38-1500	C70	W59-1150	C80	W61-1125	C78	W99-2001-GE	C75
VXS-100-GL	D101	W38-1500-C	C70	W59-1162	C80	W61-1137	C78	W99-2063	C75
VXS-100-GL-WG	D101	W38-1500-SN	C70	W59-1175	C80	W61-1150	C78	W99-2063-GE	C75
VXS-100-PC	D101	W38-1600LSSGE	C79	W59-1187	C80	W61-1162	C78	W99-3800-SS	C74
VXS-100-PX	D101	W38-2000	C70	W59-1200	C80	W61-1175	C78	W99-3800-SS-C	C74
VXS-100-PX-WG	D101	W38-2000-C	C70	W59-2000	C80	W61-1187	C78	W99-3815-SS	C74
VXS-CSA-GL	D107	W38-6000-C-GE	C75	W59-2012	C80	W61-1200	C78	W99-3815-SS-C	C74
VXS-CSA-GL-WG	D107	W50-1000	C69	W59-2025	C80	W61-2000	C78	W99-3820-SS	C74
VXS-CSA-PC	D107	W55-0001	C81	W59-2037	C80	W61-2012	C78	W99-4100-SSLH	C73
VXS-CSA-PX	D107	W55-1000	C81	W59-2112	C80	W61-2025	C78	W99-4100-SSRH	C73
VXS-CSA-PX-WG	D107	W56-1000	C81	W59-2125	C80	W61-2037	C78	W99-6015-SS	C73
VXS-LEDN10PC	D99	W58-1000	C79	W59-2137	C80	W61-2112	C78	WS1224SS	H203
W19-1000	C69	W58-1012	C79	W59-2150	C80	W61-2125	C78	WS1236SS	H203
W19-10S00-C	C69	W58-1025	C79	W59-2162	C80	W61-2137	C78	WS1248SS	H203
W19-1000-SN	C69	W58-1037	C79	W59-2175	C80	W61-2150	C78	WS1260SS	H203
W19-1000-C-SN	C69	W58-1112	C79	W59-2187	C80	W61-2162	C78	WS1272SS	H203
W19-1500	C69	W58-1125	C79	W59-2200	C80	W61-2175	C78	WS1224SS-PR	H203
W19-1500-C	C69	W58-1137	C79	W59-3000	C80	W61-2187	C78	WS1236SS-PR	H203
W19-2000	C69	W58-1150	C79	W59-3012	C80	W61-2200	C78	WS1248SS-PR	H203
W19-2000-C	C69	W58-1162	C79	W59-3025	C80	W61-3000	C78	WS1260SS-PR	H203
W27-0001-C	C94	W58-1175	C79	W59-3037	C80	W61-3012	C78	WS1272SS-PR	H203
W27-0001-CTS	C94	W58-1187	C79	W59-3112	C80	W61-3025	C78		
W27-0002-C	C94	W58-1200	C79	W59-3125	C80	W61-3037	C78		
W27-1173H	C93	W58-2000	C79	W59-3137	C80	W61-3112	C78		
W27-5202	C91	W58-2012	C79	W59-3150	C80	W61-3125	C78		
W27-5204	C91	W58-2025	C79	W59-3162	C80	W61-3137	C78		
W27-5304	C91	W58-2037	C79	W59-3175	C80	W61-3150	C78		
W27-5306	C91	W58-2112	C79	W59-3187	C80	W61-3162	C78		
W27-5501	C93	W58-2125	C79	W59-3200	C80	W61-3175	C78		
W27-5502	C93	W58-2137	C79	W59-4000	C80	W61-3187	C78		
W27-5550	C93	W58-2150	C79	W59-4012	C80	W61-3200	C78		
W27-5562	C93	W58-2162	C79	W59-4025	C80	W61-4000	C78		
W27-5568	C93	W58-2175	C79	W59-4037	C80	W61-4012	C78		
W27-5575	C93	W58-2187	C79	W59-4112	C80	W61-4025	C78		

Terms & Conditions

Terms of Payment - NET 30 days subject to satisfactory credit arrangements. (No shipments will be made to accounts which are in arrears.)

No Minimum Charge

Deliveries - Component Hardware® is not responsible for delays in deliveries due to circumstances beyond our control such as fires, strikes, transportation delays, material shortages, accidents or other contingencies of similar nature.

Returned Merchandise - No returned goods will be accepted without permission. A Returned Goods Authorization number is required prior to return, which can be obtained by calling Component Hardware at 800-526-3694. All returns must have the RGA Number posted on the exterior of all associated cartons.

No item will be accepted for return six months after invoice date. Freight charges for returned goods must be prepaid. All returned goods are subject to a 25% restocking charge and must be in complete and resalable condition. Items made to customers' specifications or specially ordered goods are not returnable.

Shortages - Any claims for shortage must be made immediately upon receipt of merchandise. Shortage claims will be invalid unless Component Hardware is notified in writing within 30 days of invoice date.

Special Products - If orders for items that are special (non-catalog) are cancelled, Component Hardware shall be reimbursed for any expense incurred in the purchase of raw or finished material and further processing thereof.

Product Changes - Although all items will be furnished as described unless otherwise indicated. However, we reserve the right to alter, modify, or redesign products without creating any liability for the obsolescence of customer inventories.

Taxes - Any federal, state or city taxes applicable will be added to prices shown. Clerical and printing errors and omissions are subject to correction. No representative, dealer, distributor or any other person is authorized or permitted to obligate this corporation to any liability, not strictly in accordance with the above policies.

LIMITED WARRANTY

PLEASE READ THIS LIMITED WARRANTY BEFORE INSTALLING OR USING ANY COMPONENT HARDWARE PRODUCT. IF THESE TERMS ARE NOT ACCEPTABLE TO YOU, IMMEDIATELY RETURN THE PRODUCT TO COMPONENT HARDWARE GROUP, INC. BEFORE INSTALLATION OR USE.

Component Hardware Group Inc. warrants that its hardware products will remain free from defects in material and workmanship for 90 days from the user's date of purchase. Liability under this limited warranty is restricted to credit, repair or replacement of the product or part found to be defective. Component Hardware shall not be responsible for labor costs or any other damages, either direct or consequential. Component Hardware products or parts which have been altered in any manner after purchase are excluded from this limited warranty.

Replacement or repair of a product or part under this limited warranty will be made within a reasonable time after Component Hardware is notified of the alleged defect or, if Component Hardware desires to inspect the allegedly defective product or part, within a reasonable time after that inspection.

No defective product or part should be shipped to Component Hardware without written authorization obtained from it in advance. Claims for unauthorized shipping expenses will not be honored. At Component Hardware's option, it may request return of the allegedly defective product or part for inspection. Permitted returns of allegedly defective products or parts under this limited warranty shall be delivered to Component Hardware Group, Inc., 1890 Swarthmore Avenue, Lakewood, NJ 08701. Please mark carton Attn: Warranty Department and include the Returned Goods Authorization number.

Component Hardware does not assume responsibility for any damage incurred as a result of shipping. Those claims must be filed with the shipper.

This warranty does not apply in states or provinces which do not permit restrictions on the length of warranty or on the exclusion of direct or consequential damages.

ANY WARRANTIES, REPRESENTATIONS OR STATEMENTS BY AN AGENT OF COMPONENT HARDWARE THAT DIFFER IN ANY WAY FROM THE TERMS OF THIS WRITTEN AGREEMENT SHALL HAVE, AND SHALL BE GIVEN, NO FORCE OR EFFECT.

THIS LIMITED WARRANTY IS GIVEN EXPRESSLY AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, OR OTHERWISE, AND CONSTITUTES THE ONLY WARRANTY MADE BY COMPONENT HARDWARE.



© Copyright 2023, Component Hardware Group, Inc. CAT-X020 Rev. 05/2023

All photographs and illustrations are considered to be a representation of the actual item. In some cases there may be slight variations.

This catalog, copy, part numbers and unique method of illustrating products is copyrighted by Component Hardware.
All rights reserved. No portion of this catalog may be reproduced in any form or by any means in whole or in part, without the written consent of Component Hardware. Component Hardware reserves the right to make any and all changes and to discontinue any of its products without notice. Not responsible for typographical errors.

Worldwide Availability:

NORTH AMERICA

COMPONENT HARDWARE NORTHEAST
Phone: +1 800-526-3694

COMPONENT HARDWARE SOUTHWEST
Phone: +1 877-476-3700

COMPONENT HARDWARE WEST
Phone: +1 800-227-3855

COMPONENT HARDWARE - CANADA
Phone: +1 905-415-2280



EUROPE

CHG EUROPE B.V.
Phone: +31-(0)76 596 86 99



ASIA

CHG KEIL TRADING
Phone: +86-21-6440-1211



Your Global Partner for Innovative Solutions



90 Matawan Rd, Matawan, NJ 07747
800-526-3694



150 Shields Court, Markham Ontario, L3R 9T5
800-513-3078



Hazeldonk 6475, 4836 LH Breda, The Netherlands
+31 (0)76-596 8699

www.componenthardware.com



COMPONENT
HARDWARE®